

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION




.19

© COPYRIGHT 19

BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
CM	53		N	REVISED PER EC 063B-0079-00	21-FEB-00	KW SR

1. WIRE RANGE: 20-14 (0.5-2mm²) AWG
INSULATION RANGE: .125 MAX.

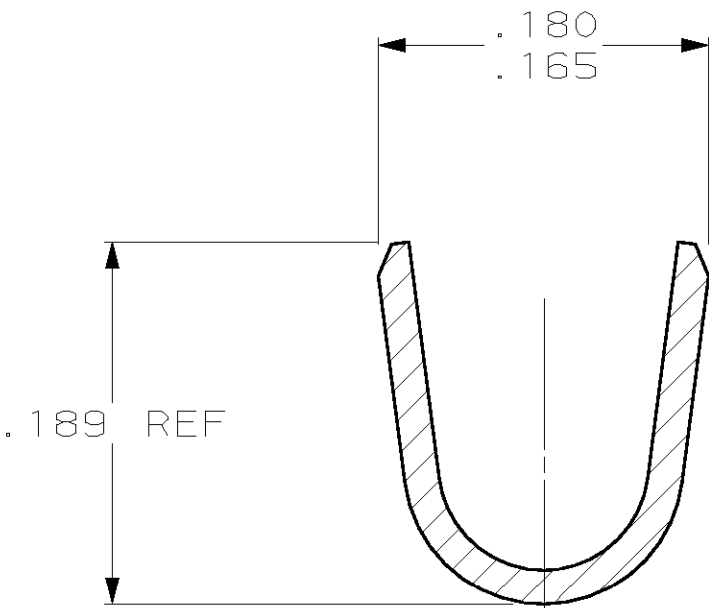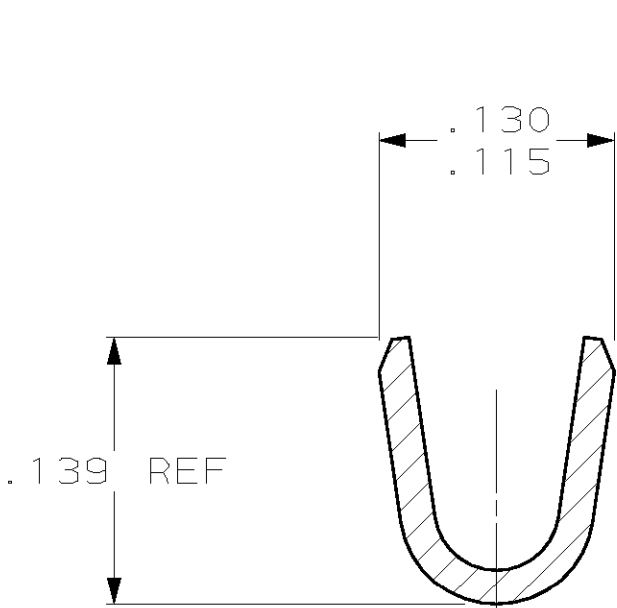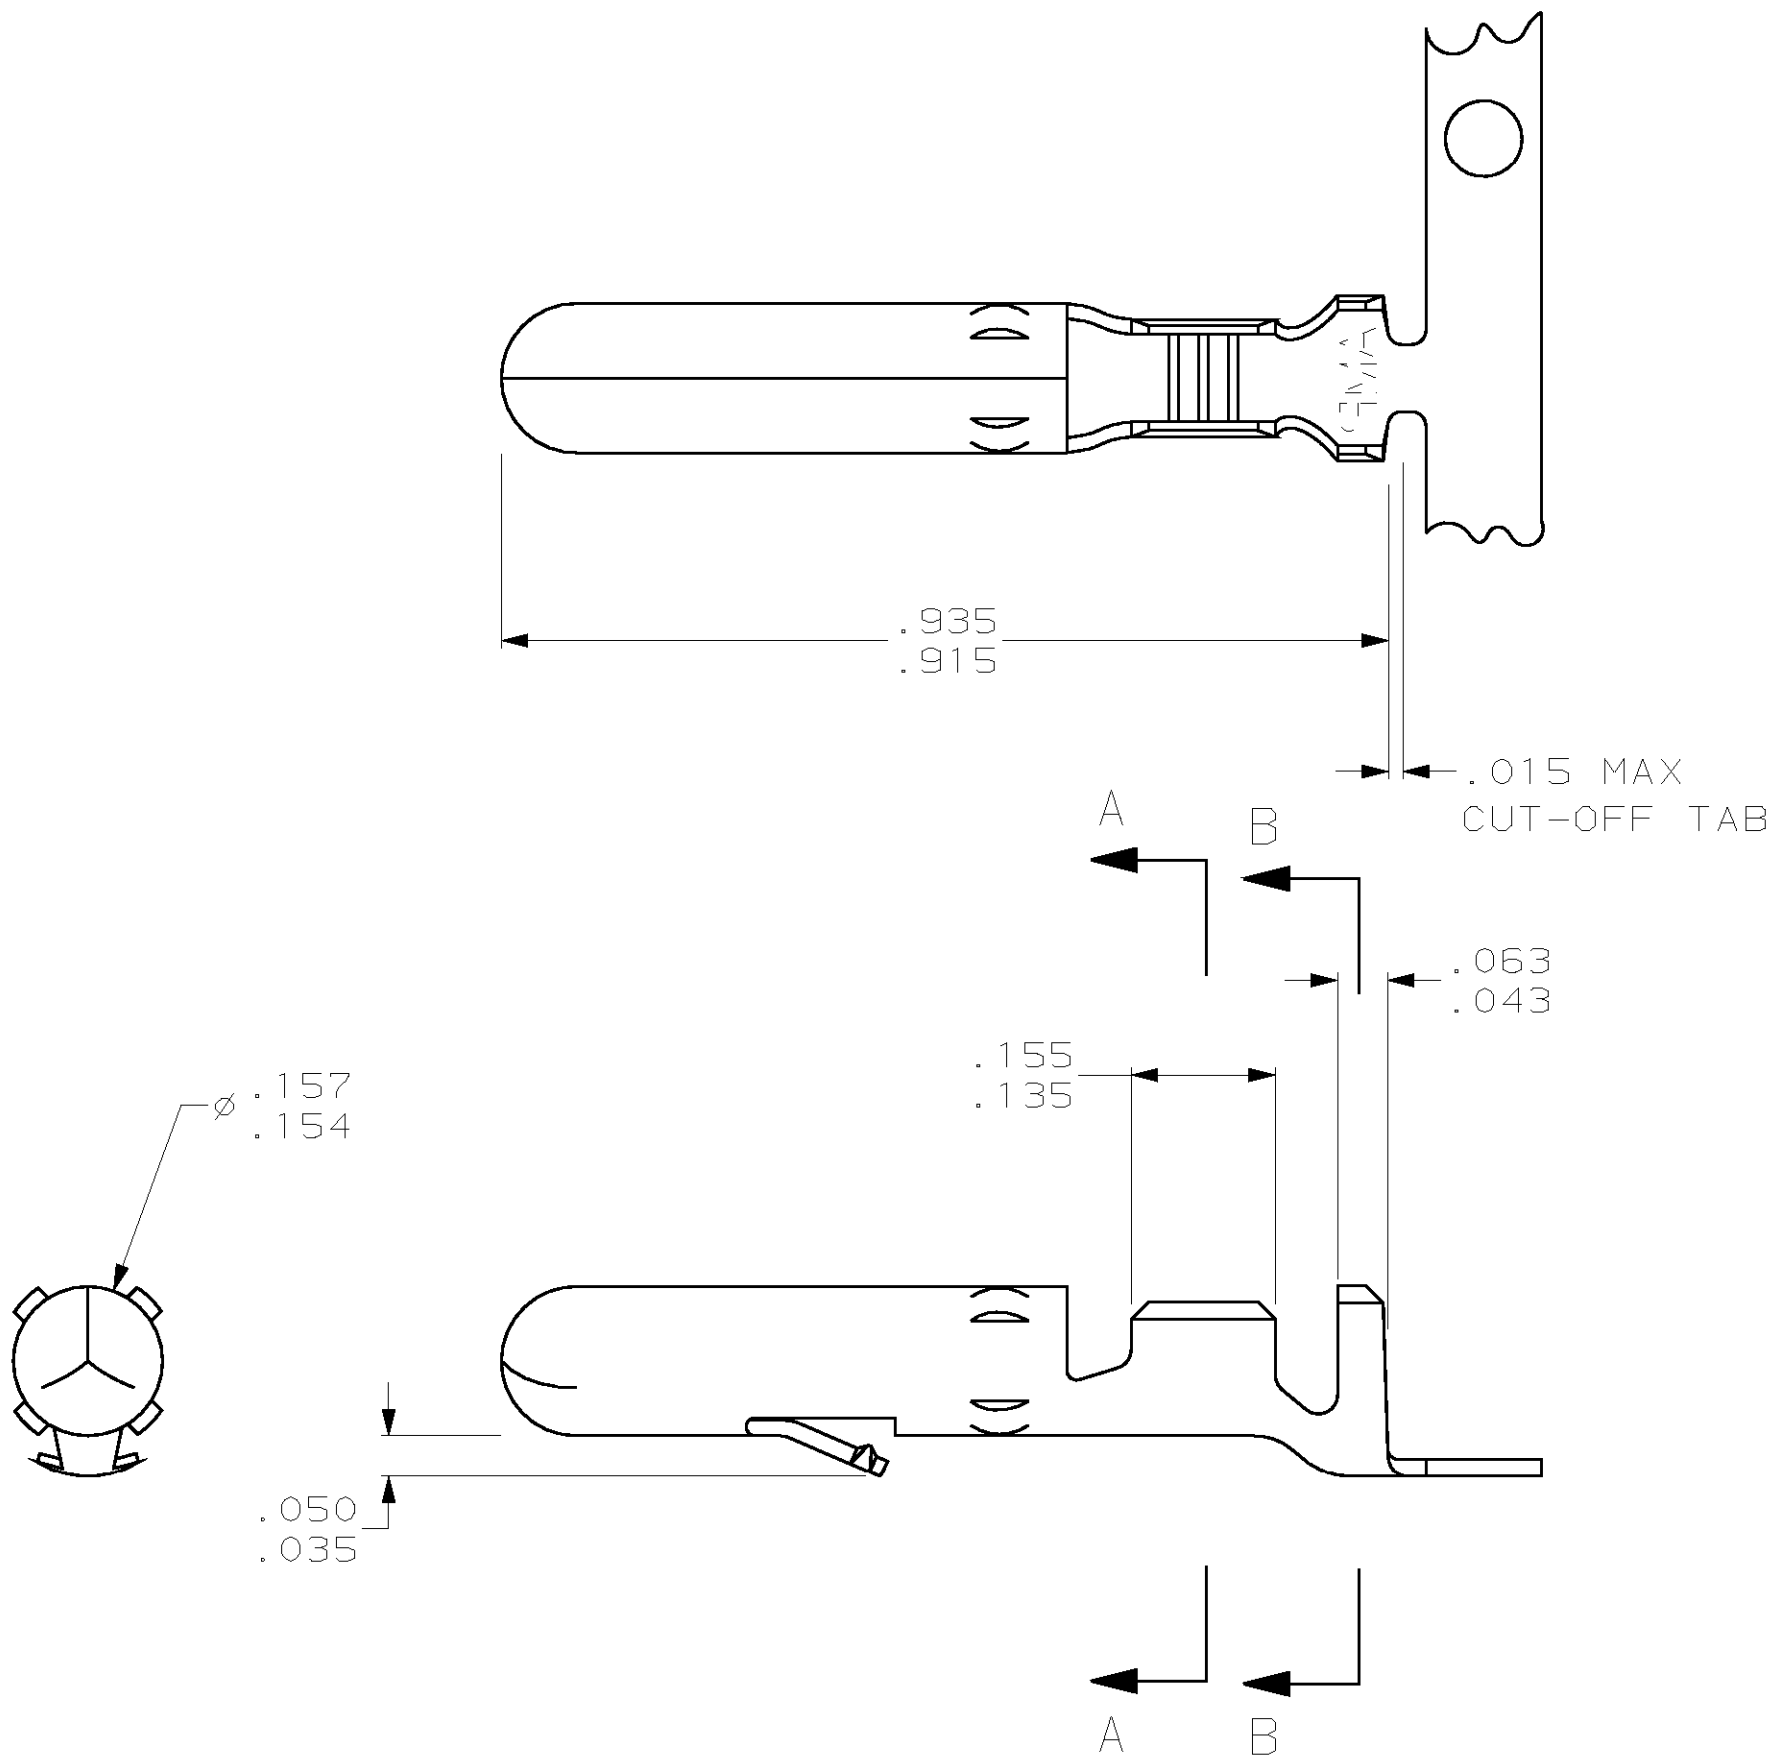

.050	1.27	.139	3.53	.180	4.57	—	—
.043	1.09	.135	3.43	.165	4.19	—	—
.035	0.89	.130	3.30	.157	3.99	—	—
.018	0.46	.125	3.18	.156	3.96	.935	23.75
.015	0.38	.115	2.92	.155	3.94	.915	23.24
.005	0.13	.063	1.60	.154	3.91	.189	4.80
IN	MM	IN	MM	IN	MM	IN	MM

CONVERSION TABLE

METRIC

PRELIMINARY	TIN	.018 PH BRZ	61086-3
	TIN	.018 BRASS	61086-1
	FINISH	MATERIAL	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. HUFFMAN 9-12-96	AMP AMP Incorporated Harrisburg, PA 17105-3608			
DIMENSIONS: INCHES		CHK R. SWING 9-12-96				
	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD C. MARTIN 9-12-96	NAME PIN, .156 MATE-N-LOK™			
		PRODUCT SPEC —				
			APPLICATION SPEC —	SIZE A2	CAGE CODE 00779	DRAWING NO C-61086
	MATERIAL SEE TABLE	FINISH SEE TABLE	WEIGHT —			
CUSTOMER DRAWING			SCALE 5:1	SHEET 1 OF 1	REV N	