


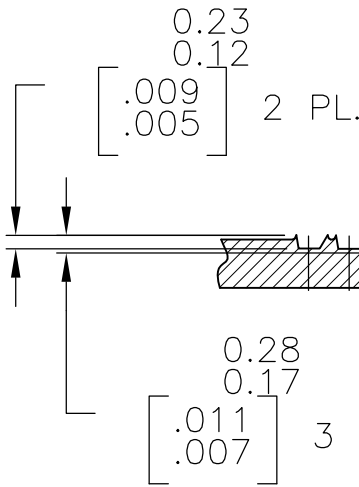
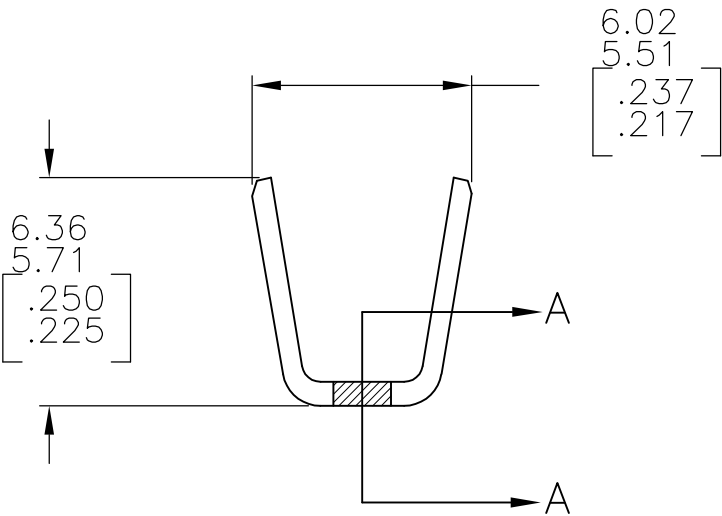
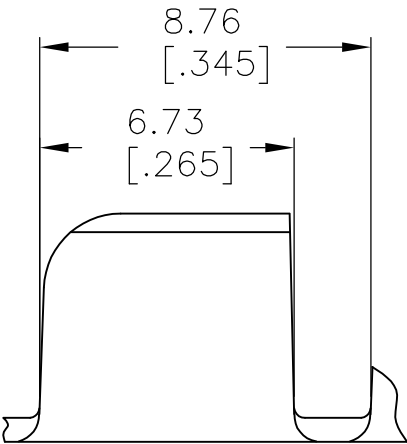


2		1					
LOC	DIST	REVISIONS					
AF	50	P	LTR	DESCRIPTION	DATE	DWN	APVD
			F4	REVISED PER ECR-12-003652	24FEB12	JR	GP

9 AMPLIVAR SERRATIONS

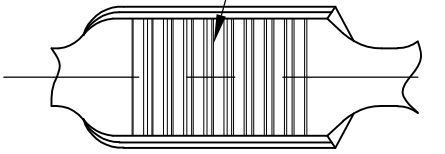

SECTION A-A
SCALE : 10:1



- 1
- PRODUCT PROVIDED IN STRIP FORM ON REELS; BREAKS MAY BE PRESENT.
- 2
- DIMENSIONS IN BRACKETS ARE IN INCHES.
- 3
- CRIMP WIDTH: .180 F
CRIMP HEIGHT (±.002)=(TOTAL CMA+23,000)/312,500
CRIMP WIDTH: .220 F
CRIMP HEIGHT (±.002)=(TOTAL CMA+25,000)/375,000
GENERAL APPLICATION GUIDELINES MUST BE FOLLOWED AS SPECIFIED IN CATALOG #82221
FOR APPLICATOR INFORMATION CALL : 1-800-722-1111
FOR PRODUCT INFORMATION CALL : 1-800-522-6752
- 4
- WIRE RANGE 7000-14000 CMA

OBSOLETE	—REVERSE	62310-3
	STANDARD	62310-2
	REELING	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN RAGHAVENDRA	31JAN06	TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK G.D.PORTA	—				
		APVD G.D.PORTA	—	NAME SPLICE, AMPLIVAR 7000-14000 CMA			
		PRODUCT SPEC —		—			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC 114-2003		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
MATERIAL REF 0.64±0.03 [.025±.001] BRASS		WEIGHT —		A300779		C-62310	—
FINISH TIN PL.		CUSTOMER DRAWING		SCALE	5:1	SHEET	1 OF 1
						REV	F4