Any unauthorised use of this drawing, any copying or passing on to third parties, whether in whole or in part, is not permitted. Any infringement will be prosecuted in civil and penal law.

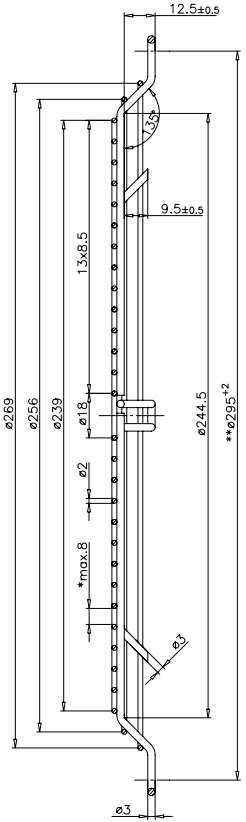

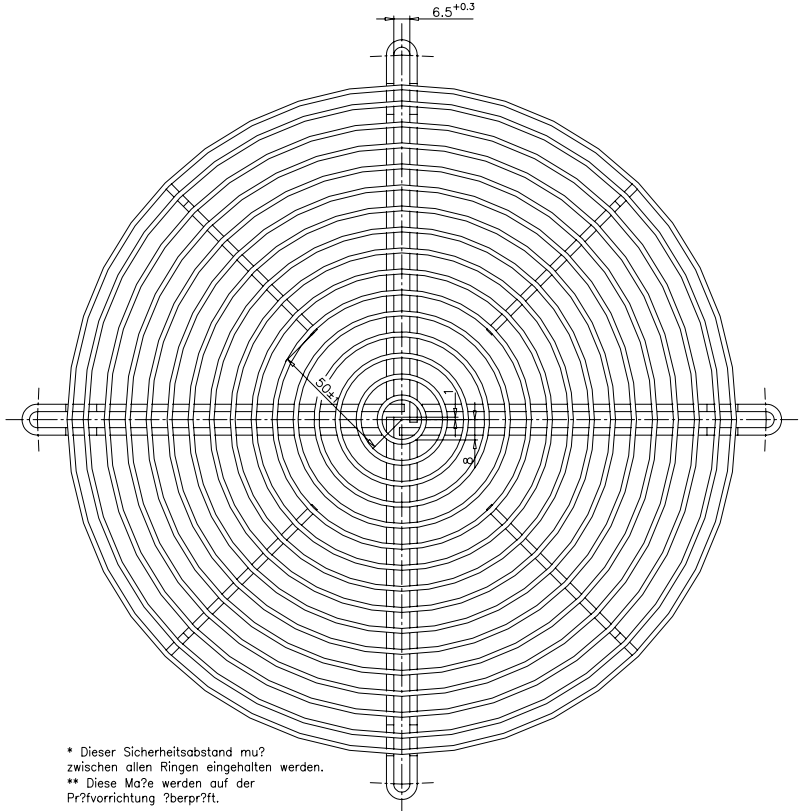

* Dieser Sicherheitsabstand mu? zwischen allen Ringen eingehalten werden.
** Diese Ma?e werden auf der Pr?fvorrichtung ?berpr?ft.

** this safety distance has to be kept between all rings*

*** these dimensions have to be controled by test gauge.*

Werkstoff: St37 phosphatiert
② Oberfl?che: Kunststoffbeschichtet auf Polyester-/Epoxidharzbasis silber-metallic gl?nzend mit Relius-Pulverlack 531-9624 Schichtst?rke 40-60?m ③

material: St37 phosphated
plastic coated based on polyester- /epoxy resin
silver-metalic lucent with Relius powder coating 531-9624
layer thickness 40-60?m

TOLERANCES DIN ISO 2768 mittel	ebm MOTOREN VENTILATOREN										
SCALE 1:1	Schutzgitter *guard grille*			4	english	03.07.03	CW		FIT	DEVIATION	
				3	40658	07.02.01	CW				
				2	39470	28.09.00	JG				
SIZE 250	64936-2-403③	DATE	NAME	1	33444	13.10.98	CW				
DISTRIBUTION AUS/ML/T		DESIGNED 01.10.98	Bc	Ind.	KM-Nr.	DATE	NAME				
		CHECKED		REPRO-SEC		X					
		CAD: CAD0011840			EC	AC	EV	EP		SHEET 1 OF 1	

AutoCAD