

MEGOHMMETERS

15,000V DIGITAL

MODEL 6555

The only fully automated 15,000V graphical insulation tester, including the ability to test program up to three step voltage profiles



SPECIFICATIONS

MODELS	6555	
INSULATION TESTS		
Test Voltage	500V 1000V 2500V 5000V 10,000V 15,000V	10kΩ to 2000GΩ (2TΩ) 10kΩ to 4000GΩ (4TΩ) 10kΩ to 10,000GΩ (10TΩ) 10kΩ to 15,000GΩ (15TΩ) 10kΩ to 25,000GΩ (25TΩ) 10kΩ to 30,000GΩ (30TΩ)
Fixed Test Voltages	500/1000/2500/5000/ 10,000/15,000V	
Variable Voltages	Variable: 40 to 15kV Three user programmable voltage schemes	
Ramp Mode	Programmable ramps: start voltage/end voltage/duration	
Ramp Configuration Range	40 to 1100V/500 to 15,000V	
Step Mode	Up to 10 steps (voltage and duration configurable for each step)	
Voltage Test/Safety Test	0 to 2500VAc; 0 to 4000Vdc	
Capacitance Measurement	0.005 to 9.999μF/10.00 to 49.99μF	
Leakage Current Measurement	0 to 8mA	
Discharge After Test	Yes/Automatic	
Additional Test Stop Modes	I-Limit Early-Break Timer	Programmable: 0.2 to 5mA di/dt Up to 99 minutes 59 seconds
Burn Mode	Constant testing	
Ratio Calculation	PI, DAR, DD	
Calculation of R at ref. T°	Yes	
Measurement Display Filter	3 filters with 3 possible time-constants	
Graphs on Display	R(t)+V(t); I(t); I(V)	
Storage	256 registers, stores 80,000 points: R, V, I and date	
Communication	USB optically-isolated port	
PC Software	DataView®	
Power Supply	NiMH rechargeable batteries, two 9.6V 4Ah battery packs charging by external voltage: 90 to 260V; 50/60Hz	
Battery Charging	Battery charging allowed while performing insulation measurements	
Dimensions / Weight	13.39 x 11.81 x 7.87" (340 x 300 x 200mm)/approx. 13.7lbs (6.2kg)	
EMC, Mechanical Protection, Altitude	EN 61326-1, IP54, 2000m	
Electrical Safety	1000V CAT IV; IEC61010-1 and IEC 61557	

FEATURES

- True Megohmmeter®
- Fixed or programmable test voltage from 40V to 15kV
- Wide measurement range from 10kΩ to 30TΩ
- 5mA short circuit current
- Step voltage testing
- Ramp voltage testing
- Automatic calculation of DAR / PI / DD /ΔR (ppm/V) ratios
- Large, backlit graphical LCD screen with digital display, bargraph and R(t)+V(t), I(t) and I(V) graphs
- Multiple test modes: voltage ramp and step with "Burn-In", "Early-Break" and "I-Limit" modes
- Three filter settings to optimize measurement stability
- Calculation of R at a reference temperature
- Storage of 80,000 measurements
- Includes DataView® software for data retrieval, real-time display, analysis and report generation
- Optically-isolated USB communication for transfer onto PC and report generation with DataView® software

CATALOG NO.	DESCRIPTION
2130.32	Megohmmeter Model 6555 (Graphical, Analog Bargraph, Backlight, Alarm, Timer, 500V, 1000V, 2500V, 5000V, 10kV, 15kV, Ramp, StepV, Variable, Auto DAR/PI/DD, DataView® software)
2151.18	Lead - One Shielded Safety Lead (black) 25 ft w/Hippo Clips (15kV)
2151.19	Lead - One Shielded Safety Lead (blue) 25 ft w/Hippo Clips (15kV)
2151.20	Lead - One Shielded Safety Lead (red) 25 ft w/Hippo Clips (15kV)
2151.21	Lead - One Shielded Safety Lead (black) 45 ft w/Hippo Clips (15kV)
2151.22	Lead - One Shielded Safety Lead (blue) 45 ft w/Hippo Clips (15kV)
2151.23	Lead - One Shielded Safety Lead (red) 45 ft w/Hippo Clips (15kV)




CONFIGURE ALL FUNCTIONS OF THE MEGOHMMETER MODELS 1060, 5060, 5070, 6526, 6532, 6534, 6550 & 6555




- Print reports of all test results
- Select test voltage and run tests from your computer with a simple click and execute process
- Capture and display data in real-time
- Retrieve data from the instrument's memory for:
 - Over 1500 insulation resistance measurements
 - Over 4000 resistance measurements
- Display DAR and PI ratios
- Plot graphs of manual and timed tests
- Include your analysis comments section with the report
- Store a library of setups for different applications
- Certification of results through report generation
- Free updates are available on our website www.aemc.com


TYPICAL DATAVIEW® FUNCTIONAL DISPLAYS

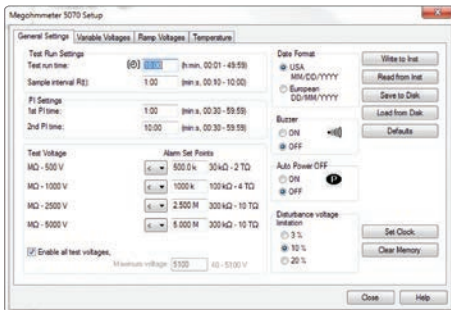

Four tabbed dialog boxes allow for clear and easy setup of all functions of the Model 5070, including setup for variable voltage and alarm set points, as well as step voltage tests and temperature compensation.

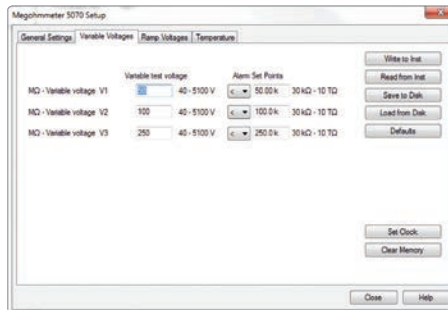

Variable Voltage selections from 40 to 5100V and can also be programmed along with alarm set points.

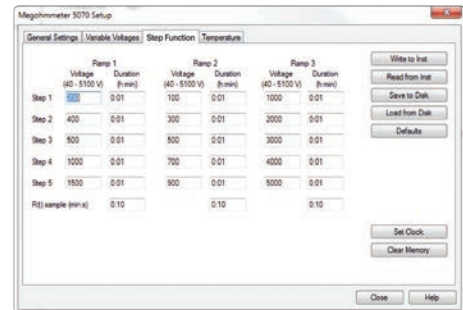


Model 5070 includes Step Function which allows programming of three different ramp test profiles, each containing up to five voltage steps between 40 and 5100V and time per step of up to 10 hours.


DISPLAYS



All stored test results presented on screen.



Clear and straightforward set up of parameters.

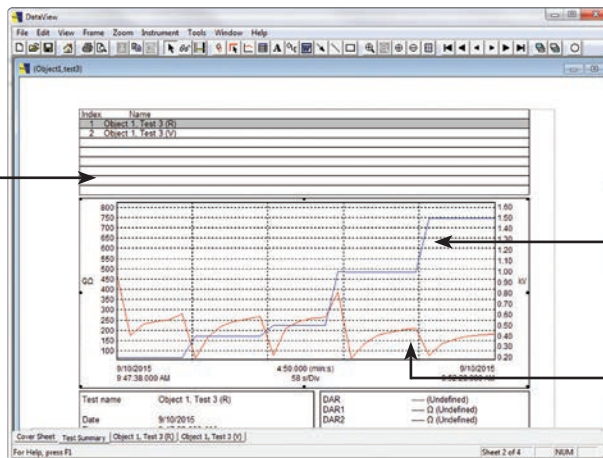

Test result status box displays complete test results in real-time

Step voltage during the test run

Insulation resistance with temperature compensation

Run test and display text and graphical results from one dialog box. Model 5070 also displays step voltage.

MEGOHMMETERS

SELECTION CHART

AEMC MODEL NUMBER	AEMC CATALOG NUMBER	TEST VOLTAGE	INSULATION RANGE	RESISTANCE RANGE	CONTINUITY RANGE	CAPACITANCE RANGE	VOLTAGE DETECTION	POWER SOURCE	DISPLAY	DATAVIEW™ SOFTWARE
6501	2126.51	500V	0.5 to 200MΩ	0 to 500kΩ	0 to 100Ω	—	0 to 600V _{ac}	Hand-cranked	Analog	No
6503	2126.52	250V 500V 1000V	1 to 500MΩ 1 to 500MΩ 10 to 5000MΩ	—	—	—	0 to 600V _{ac}	Hand-cranked	Analog	No
6527	2126.53	250V 500V 1000V	1kΩ to 4GΩ 1kΩ to 4GΩ 1kΩ to 4GΩ	0.0 to 400.0kΩ	0.00 to 400Ω	—	0 to 600V _{ac} 0 to 1000V _{dc}	6 x AA Alkaline Batteries	Digital/ Analog	No
1026	2117.72	250V 500V 1000V	1kΩ to 4GΩ	4kΩ	0 to 40Ω	—	0 to 600V _{ac/dc}	8 x AA Alkaline Batteries	Digital/ Analog	No
6522	2155.51	250V 500V 1000V	50kΩ to 40GΩ	—	10Ω	—	700V _{ac/dc}	6 x AA Alkaline Batteries	Digital/ Analog	No
6524	2155.52	50V 100V 250V 500V 1000V	10kΩ to 200GΩ	1000kΩ	10Ω, 100Ω	—	700V _{ac/dc}	6 x AA Alkaline Batteries	Digital/ Analog	No
6526	2155.53	50V 100V 250V 500V 1000V	10kΩ to 200GΩ	1000kΩ	10Ω, 100Ω	0.1n to 10μF	700V _{ac/dc}	6 x AA Alkaline Batteries	Digital/ Analog	Yes
6532	2155.54	50V 100V	10kΩ to 20GΩ	1000kΩ	10Ω, 100Ω	0.1n to 10μF	700V _{ac/dc}	6 x AA Alkaline Batteries	Digital/ Analog	Yes
6534	2155.55	10V 25V 100V 250V 500V	2kΩ to 50GΩ	1000kΩ	10Ω, 100Ω	—	700V _{ac/dc}	6 x AA Alkaline Batteries	Digital/ Analog	Yes
6536	2155.56	10V 100V	2kΩ to 20GΩ	1000kΩ	10Ω, 100Ω	—	700V _{ac/dc}	6 x AA Alkaline Batteries	Digital/ Analog	No
6536 ESD Floor Kit	2155.57									
1050	2130.01	50V 100V 250V 500V 1000V	2kΩ to 200GΩ 4kΩ to 400GΩ 10kΩ to 1TΩ 20kΩ to 2TΩ 40kΩ to 4TΩ	0.01 to 400kΩ	0.01 to 39.99Ω	0.005 to 4.999μF	0 to 1000V _{ac/dc}	8 x 1.5V C Cell Batteries	Digital/ Analog	No
1060	2130.03	50V 100V 250V 500V 1000V	2kΩ to 200GΩ 4kΩ to 400GΩ 10kΩ to 1TΩ 20kΩ to 2TΩ 40kΩ to 4TΩ	0.01 to 400kΩ	0.01 to 39.99Ω	0.005 to 4.999μF	0 to 1000V _{ac/dc}	Rechargeable NiMH Battery	Digital/ Analog	Yes
6505	2130.18	500V 1000V 2500V 5000V	30kΩ to 2000GΩ 100kΩ to 4000GΩ 100kΩ to 10,000GΩ 300kΩ to 10,000GΩ	—	—	0.005 to 49.99μF	2500V _{ac} 4000V _{dc}	Rechargeable NiMH Battery	Digital/ Analog	No
5050	2130.20	500V 1000V 2500V 5000V	30kΩ to 2TΩ 100kΩ to 4TΩ 100kΩ to 10TΩ 300kΩ to 10TΩ	—	—	0 to 49.99μF	2500V _{ac} 4000V _{dc}	Rechargeable NiMH Battery	Digital/ Analog	No
5060	2130.21	500V 1000V 2500V 5000V	30kΩ to 2TΩ 100kΩ to 4TΩ 100kΩ to 10TΩ 300kΩ to 10TΩ	—	—	0 to 49.99μF	2500V _{ac} 4000V _{dc}	Rechargeable NiMH Battery	Digital/ Analog	Yes
5070	2130.30	500V 1000V 2500V 5000V	30kΩ to 2TΩ 100kΩ to 4TΩ 100kΩ to 10TΩ 300kΩ to 10TΩ	—	—	0 to 49.99μF	2500V _{ac} 4000V _{dc}	Rechargeable NiMH Battery	Graphic/ Digital	Yes
6550	2130.31	500V 1000V 2500V 5000V 10,000V	10kΩ to 2000GΩ 10kΩ to 4000GΩ 10kΩ to 10,000GΩ 10kΩ to 15,000GΩ 10kΩ to 25,000GΩ	—	—	0.001 to 9.999μF 10.00 to 19.99μF	0 to 2500V _{ac} 0 to 4000V _{dc}	Rechargeable NiMH Battery	Digital/ Analog	Yes
6555	2130.32	500V 1000V 2500V 5000V 10,000V 15,000V	10kΩ to 2000GΩ 10kΩ to 4000GΩ 10kΩ to 10,000GΩ 10kΩ to 15,000GΩ 10kΩ to 25,000GΩ 10kΩ to 30,000GΩ	—	—	0.001 to 9.999μF 10.00 to 19.99μF	0 to 2500V _{ac} 0 to 4000V _{dc}	Rechargeable NiMH Battery	Digital/ Analog	Yes