


6PCV-02-007 Product Details

Live Product Chat US Only
8:30am - 5pm ET, Mon - Fri

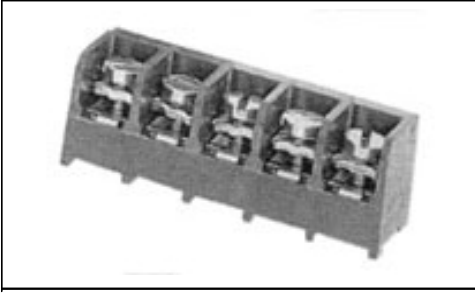

6PCV-02-007
(4-1437652-0)
 [Active](#)

Barrier Strips, Barrier Strip Sockets

[Always EU RoHS/ELV Compliant](#) ([Statement of Compliance](#))

Product Highlights:

- Barrier Strip
- Tri-Barrier Block Series
- Base Style = Raised
- 9.53 mm Centerline
- Number of Levels = Single

[View all Features](#) | [Find Similar Products](#)

Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

Documentation & Additional Information

Product Drawings:

- [6PCV-XX-007 ASSEMBLY](#) (PDF, English)

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- None Available

[onlinecomponents.com](#)
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files:

- None Available

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- [Product Type](#) = Barrier Strip
- [Mount Angle](#) = Vertical
- [Mounting Ears](#) = Without
- [Number of Circuits](#) = 2
- [Screw Material](#) = Steel
- UL Recognized = File No. E54800

Mechanical Attachment:

- [Mounting Style](#) = Direct (All Positions Filled)
- [Screw Plating](#) = Bright Zinc/Chrome

Electrical Characteristics:

- [Base Style](#) = Raised
- [Number of Levels](#) = Single
- [End Barriers](#) = Without
- [Mounting Insert](#) = Without
- [Top Hardware](#) = Steel Binding Combo Head Screws
- Bracket = Without
- Screw Head Type = Phil-Slot

Body Related Features:

- [Block Series](#) = Tri-Barrier
- [Centerline \(mm \[in\]\)](#) = 9.53 [0.375]
- [Number of Rows](#) = 1
- [Terminal Style](#) = Printed Circuit Pin 5.08 [.200]
- CSA File No. = LR30811

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- RoHS/ELV Compliance History = Always was RoHS compliant

Other:

- Brand = Buchanan