


HONEYWELL PART NUMBER
6SX8
PRODUCT CODE VDF1019

REV	DOCUMENT	CHANGED BY	CHECK
4	0089212	NMN 09MAY12	CMH

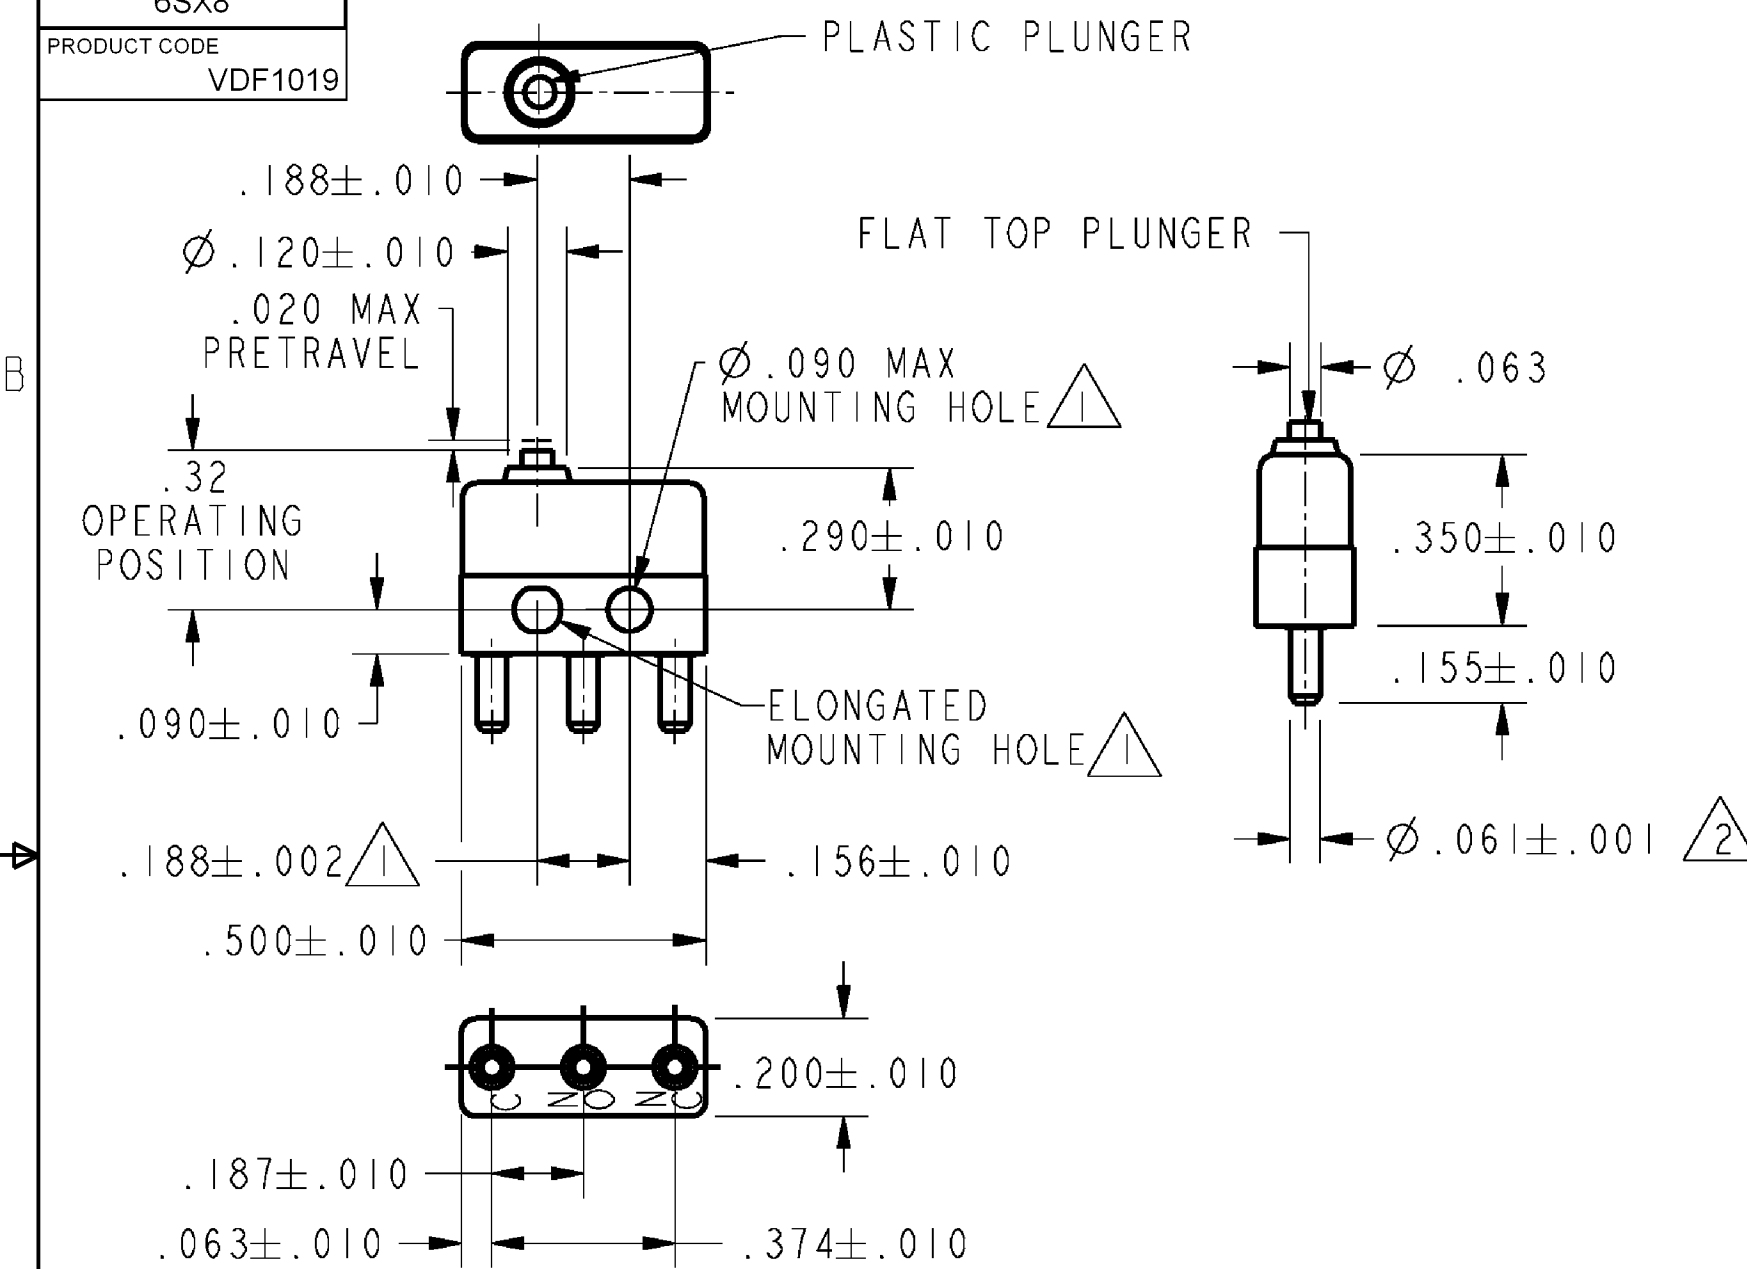

- NOTES**
- ① - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF Ø.087 MAX ON .188±.002 CENTERS
 - ② - TERMINALS ARE PLATED FOR SOLDERING
 - 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 400°F
 - 4 - STATIONARY CONTACT MATERIAL - GOLD ALLOY
 - 5 - MOVABLE CONTACT MATERIAL - GOLD PLATED GOLD ALLOY.

RELEASE NO.	PR-24308
REPLACES	-

CHARACTERISTICS
OPERATING FORCE - - - 5 OZ MAX
RELEASE FORCE - - - - 1 OZ MIN
DIFFERENTIAL TRAVEL - - - .005 MAX
OVERTRAVEL - - - - - .004 MIN

ELECTRICAL DATA		
CONTACT ARRANGEMENT SPDT		
30 VOLTS DC RATING		
	SEA LEVEL	50,000 FT
INDUCTIVE	1/2 AMP	1/2 AMP
RESISTIVE	1 AMP	1 AMP
MAXIMUM INRUSH 2 AMP		
APPROVALS	UL CSA 1A 125 VAC	BRAND L22

DESIGN UNITS: INCH
TOLERANCES UNLESS NOTED:
NO PLACE X ±
ONE PLACE .X ±
TWO PLACE .XX ±
THREE PLACE .XXX ±
FOUR PLACE .XXXX ±
ANGLES ±
THIRD ANGLE PROJECTION

DRAWN	VK	04 MAR 08
CHECK	RJ	04 MAR 08
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

Honeywell			
TITLE SWITCH - BASIC			
SIZE	TYPE	DRAWING NAME	REV
B	I	6SX8	4
SCALE	NONE	WEIGHT .003 LB MAX	SHEET 1 OF 1