



Description

A 5 figure (reset) or 6 figure (non-reset), AC hour meter encased in a rugged steel housing. The non-reset models are completely sealed. Reset models are available, as are both wire lead and terminal block versions.

Features

- Rugged steel housing

Options

- Chrome bezel
- Readouts to 9999.99 hrs.
- Voltages
- Gasket (721-0004)

Specifications

Figures: 5 figure (reset) or 6 figure (non-reset), 0.19" [5mm] high, 9,999.9 (reset) or 99,999.9 (non-reset)
Reset: Reset or non-reset
Voltages: 24, 115, and 230VAC (+/- 10%), 50 or 60Hz.
Power: 3 watts max.

Mounting: Panel (3-hole or metal clamp)
Termination: Terminal block or 6" [152mm] wire leads
Temp. Range: -40°F to +160°F [-40°C to +70°C]
Approvals: UL Recognized, CSA Certified, CE Compliant
Weight: 10 oz. [284g]

Models Description

720-0001	24VAC/60Hz, non-reset, 3-hole round, 6" [152.4mm] wire leads
720-0004	115VAC/60Hz, non-reset, 3-hole round, terminal block
720-0007	115VAC/60Hz, non-reset, 3-hole round, 6" [152.4mm] wire leads
720-0008	115VAC/60Hz, non-reset, metal clamp, terminal block
720-0011	115VAC/60Hz, non-reset, metal clamp, 6" [152.4mm] wire leads


Models Description

720-0012	115VAC/60Hz, front reset, 3-hole round, 6" [152.4mm] wire leads
720-0030	115VAC/50Hz, non-reset, 3-hole round, 6" [152.4mm] wire leads
720-0031	230VAC/60Hz, non-reset, 3-hole round, terminal block
720-0036	230VAC/60Hz, non-reset, 3-hole round, 6" [152.4mm] wire leads

* Items in bold are normally in factory stock.

Dimensions

Non-Reset / Terminal Block

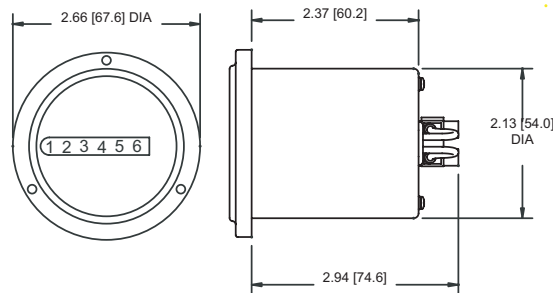


Panel cutout: 2.16" [54.9] Dia.
 Mounting holes: 0.125" [3.2] Dia. on 2.44" [62.0] B.C.

Applications

Control panels



Industrial equipment



Test equipment

