

AUDIO VIDEO ACCESSORIES

**CERTIFIED 4K PREMIUM
MALE TO MALE
HDMI CABLE
WITH ETHERNET**

Available in (FT):

- 3, 6, 10 & 15



MODEL:
55-668-PR-LENGTH

- HDMI DISTRIBUTION AMPS
- HDMI ACCESSORIES
- VIDEO EXTENDERS
- IR REPEATERS • POWER
- CONVERTERS • SPLITTERS
- SWITCHERS • CABLES
- CONNECTORS • MOUNTS
- ADAPTERS • TESTERS

Note!

- HDBaseT
- 3D Compliant
- Bi-Directional IR
- Bi-Directional RS232
- Distance:
300 FT. PLUS



**HDMI & IR BALUN OVER
SINGLE CAT5E\ CAT6 CABLE**



MODEL:
40-2010

MODEL:
40-HDMI-EXT-A



**4K@60Hz
HDMI AUDIO EXTRACTOR
(TOSLINK SPDIF + COAXIAL
+ L/R Analog)**

Note!

- YUV 4:4:4
- HDR



ABOUT US:

This Catalog represents a sample selection of some of the most relevant and top selling electronic products from our growing 6,500 sku product line. Our dedicated sales and technical staff are available to assist you with all your personal inquiries and sales needs. We are available by phone and email to provide answers to all your questions regarding all of the hardware and technology in this catalog. You can always expect high quality products and exceptional customer service with the promise we will always try our best to satisfy your expectations. We appreciate your continued support and hope you think of us when purchasing electronic parts & accessories. Our complete and most up to date product offerings are available on our company website at www.calrad.com.

TABLE OF CONTENTS:

• 10 SERIES MICROPHONE ACCESSORIES	Page 1
• 15 SERIES HEADPHONE ACCESSORIES	Page 2
• 28 SERIES WALL PLATES	Page 2
• 30 SERIES CONNECTORS: AUDIO, DATA, POWER, VIDEO, CHASSIS MOUNTS & SOLDERLESS	Page 3-6
• 35 SERIES ADAPTERS: ANALOG AUDIO, DISPLAYPORT, DVI-I, DVI-D, HDMI & VGA	Page 7-9
• 40 SERIES AUDIO & VIDEO: CONVERTERS, DISTRIBUTION AMPS, EXTENDERS, SPLITTERS & SWITCHERS	Page 9-11
• 42 SERIES CELL PHONE ACCESSORIES	Page 12
• 45 SERIES POWER SUPPLIES	Page 12
• 47 SERIES TV WALL MOUNTS	Page 13
• 55 SERIES CABLES: ANALOG AUDIO, BNC, DIGITAL AUDIO, DISPLAYPORT, HDMI, RF & VGA	Page 14-16
• 72 SERIES USB & NETWORK PRODUCTS: RJ45, USB (2.0, 3.0 & C) & SOLDERLESS	Page 17-18
• 75 SERIES ADAPTERS & CONNECTORS: RF & BNC	Page 19
• 90 SERIES POWER & ACCESSORIES: CABLE TIES, CIGARETTE LIGHTERS, MAGNETS, TAPE & TEST CLIP	Page 20
• 92 SERIES IR ACCESSORIES: DISTRIBUTION SYSTEMS, EMITTERS & RECEIVERS	Page 20
• 95 SERIES POWER & SECURITY ACCESSORIES: SURGE PROTECTION, AUDIO & VIDEO EXTENDERS	Page 21

OUR COMMITMENT TO NEW TECHNOLOGIES

Calrad is always investing resources into new electronic hardware and emerging technologies, please check our website on a regular basis for news and information in our New Products section. If you don't see items or products your looking for, please ask our sales staff for assistance, chances are we may have it in our product line and sell these items through our OEM customer channels first prior to a full release.

Some technologies to keep a lookout from us soon.

- 1) 4K x 2K@60, 4:4:4 AV Distribution Hardware over Single Fiber Cable.
- 2) Fiber Optic Cabling in Single and Multimode.
- 3) 4K AV Distribution Hardware over IP.
- 4) Voice & IP Controlled L.E.D. Lighting Hardware and Accessories.
- 5) CCTV Security Products.
- 6) Digital Interface hardware for Wired and Wireless infrastructures.
- 7) Digital 4K Up\Down Scalers and Converters.

MICROPHONE ACCESSORIES



10-95-LENGTH
XLR Male to Female Connectors.
AVAILABLE LENGTHS (FT.):
1, 1.5, 2, 3, 6, 10, 15, 20, 25, 50 & 100.



10-160-LENGTH
Heavy Duty XLR Male to Female Connectors.
AVAILABLE LENGTHS (FT.):
10, 15, 25 & 50.



• **10-150**
(Male to 2 Females)
• **10-151**
(Female to 2 Males)
XLR "Y" Cable.
3 in. long.



• **10-142-LENGTH**
(XLR Female)
• **10-143-LENGTH**
(XLR Male)
XLR to RCA Male Plug.
AVAILABLE LENGTHS (FT.):
5, 10 & 15.



• **10-155-1**
(RCA Males)
• **10-156-1**
(RCA Females)
"Y" Cable, XLR to two RCA. 1 Ft. long.



10-153-1
"Y" Cable, XLR Female to two RCA Male Plugs. 1 Ft. long.



• **10-140-LENGTH**
(XLR Female)
• **10-141-LENGTH**
(XLR Male)
XLR to 1/4" mono plug.
AVAILABLE LENGTHS (FT.):
5, 10 & 15



• **10-148-LENGTH**
(XLR Female)
• **10-149-LENGTH**
(XLR Male)
XLR to 1/4" stereo plug.
AVAILABLE LENGTHS (FT.):
3, 6, 10 & 15.



• **10-152**
(XLR Females)
• **10-158-6**
(XLR Males)
"Y" Cable, two XLR to 3.5mm Stereo Plug.
6 Ft. long.



• **10-144** (XLR Female)
• **10-146** (XLR Male)
XLR to 3.5mm mono plug.
6 Ft. long.



10-145
XLR Female Jack to 3.5mm stereo plug.
6 Ft. long.



10-157-1
"Y" Cable, two XLR Female Jacks to Right Angle 3.5mm Stereo Plug. 1 Ft. long.




• **10-145RT-1**
(XLR Female)
• **10-147RT-1**
(XLR Male)
XLR to Right Angle 3.5mm Stereo Plug.
1 Ft. long.



10-119
TOSLINK Optical to SPDIF* Digital Coaxial Signal Converter



10-105
Passive Inline Variable Stereo Audio Attenuator



10-106
60 Watt Stereo Speaker Level to Line Level Converter, (Passive Device)



10-97-BK
Black Lavalier Microphone Tie Clips



10-78-RCA
Mono RCA Analog & Digital Ground Isolation Transformer, 2 Required for Stereo.



10-78
3.5mm Mono Male to Female Connectors & Digital Ground Isolation Transformer.



10-22
Dynamic Microphone



10-76
1/4" Male Mono Plug to XLR Female output. Dual Impedance Line Matching Transformer.



10-89
1/4" Female Phone Jack to XLR Male output. Dual Impedance Line Matching Transformer.



10-88
XLR Female to XLR Male output. Dual Impedance Line Matching Transformer.



10-45-20
XLR Female Jack to 1/4" Male mono plug. 20 Ft. long.

HEADPHONE ACCESSORIES



15-118

Stereo-Monaural Headphone with stereo 1/4" phone plug.



15-135

Dynamic Stereo Monaural Headphone with stereo 1/4" phone plug.



15-135-RA

Dynamic Stereo Monaural Headphone with right angle stereo 1/4" phone plug.



15-122A

Stereo-Monaural Headphone with stereo 1/4" phone plug.



15-133

1 x 4 Headphone Distribution Amplifier. Individual Volume Controls.

28 SERIES

WALL PLATES



15-139

4 Channel Stereo Headphone Amplifier with Individual Volume Controls



4K ULTRA HD

- **28-166K** (1 PCS)
 - **28-166K-5** (5 PCS)
 - **28-166K-10** (10 PCS)
- White HDMI Keystone Female to Female Insert.




4K ULTRA HD

- **28-166K-BK** (1 PCS)
 - **28-166K-BK-5** (5 PCS)
 - **28-166K-BK-10** (10 PCS)
- Black HDMI Keystone Female to Female Insert.




4K ULTRA HD

- **28-166K-RT** (1 PCS)
 - **28-166K-RT-5** (5 PCS)
- White Right Angle HDMI Keystone Female to Female Insert.



28-113

Single Gang Wall Plate



28-114-P

Blank Plastic Insert Plate



- **28-121** (White)
 - **28-121-BK** (Black)
- Single Gang Wall Plate with Brush Bristles.



28-CER-1

(Single Gang) Scoop Style Cable Distribution Wall Plate.




28-CER-2

(Dual Gang) Scoop Style Cable Distribution Wall Plate.




28-LVU1W

Recessed Single Gang Combo Box




28-TVBU505

Recessed Two Gang Combo Box



28-161

White plastic designer style insert plate with a single HD-DB-15 feed thru jack.



28-161-3.5

White plastic designer style insert plate with a single HD-DB-15 and 3.5mm feed-thru jacks.



• **28-180-Cutout**

(White)

• **28-180-Cutout-IV**

(Ivory)

HEX HOLES DESIGNER INSERTS

White or Ivory plastic insert plates. Will accept any 3/8" audio & video connectors, RCA, RF, etc. Works with Calrad's 30 and 75 Series 3/8" feed-thru connectors.

Hex cutout = .445", Colors:

White or Ivory.

AVAILABLE CUTOUTS:

1, 2, 3, 4, 6 & 8.

AUDIO CONNECTORS

1 (800) 821-8536

PG.3



O.D. 0.22"

- **30-289-COLOR** (6mm Cable)
 - **30-291-COLOR** (2.8mm Cable)
- 75 ohm RCA Audio & Video Plug with black chrome barrel.

AVAILABLE COLOR BAND ID:
BK, BU, GN, RD, WH & YL



O.D. 0.29"

- **30-303-COLOR** RCA Audio & Video Plug for 5-7mm cable. Nickel barrel.
- AVAILABLE COLOR BAND ID:
BK, RD, WH & YL



O.D. 0.21"

- **30-350** (Male)
 - **30-351** (Female)
- RCA Audio & Video Plug with Red color coded band, 0.21" cable opening.



O.D. 0.21"

- **30-352** (Male)
 - **30-353** (Female)
- RCA Audio & Video Plug with White color coded band, 0.21" cable opening.



O.D. 0.28"

- **30-387** RCA Plug for use on cable up to RG59 coax. Spring strain relief. 0.28" Cable opening.



O.D. 0.2"

- **30-390** (Gold, Male)
 - **30-391** (Gold, Female)
 - **30-427** (Nickel, Male)
 - **30-429** (Nickel, Female)
- RCA Plug with strain relief. 0.2" Cable opening.



O.D. 0.18"

- **30-446** (Red)
 - **30-447** (Black)
- RCA Audio Plugs with screw on plastic barrel & cable clamp. 0.18" cable opening.



O.D. 0.25"

- **30-316** (Stereo)
 - **30-317** (Mono)
- 1/4" Audio Plugs with strain relief. 0.25" cable opening.



O.D. 0.28"

- **30-401-BK** (Black)
 - **30-401-RD** (Red)
- 1/4" Stereo Audio Plug with solder terminals & cable clamp. 0.28" cable opening.



O.D. 0.28"

- **30-402-BK** (Black)
 - **30-402-RD** (Red)
- 1/4" Mono Audio Plug with solder terminals & cable clamp. 0.28" cable opening.



O.D. 0.28"

- **30-404** (Mono)
 - **30-418** (Stereo)
- 1/4" Audio Plug with strain relief. 0.28" cable opening.



O.D. 0.32"

- **30-405A** 1/4" Stereo Audio Plug for 8mm cable with thick walled barrel. 0.32" cable opening.



O.D. 0.43"

- **30-419** 1/4" mono Audio Plug. Large barrel, 0.43" cable opening.



O.D. 0.26"

- **30-420** Slim 1/4" Stereo inline Audio Jack with strain relief. 0.26" cable opening.



O.D. 0.3"

- **30-415M** Slim inline 1/4" mono Audio Jack. 0.3" cable opening.



O.D. 0.29"

- **30-406** (Mono)
 - **30-408A** (Stereo)
- Flat right-angle, shielded 1/4" 3 circuit Audio Plugs. 0.29" cable opening.



O.D. 0.25"

- **30-318** (Mono Male)
 - **30-319** (Stereo Male)
 - **30-319F** (Stereo Female)
- 3.5mm Audio with strain relief, 0.25" cable opening.



O.D. 0.18"

- **30-416-BK** (Black)
 - **30-416-RD** (Red)
- 3.5mm mono Audio Plug with solder terminals & cable clamp. 0.18" cable opening.



O.D. 0.19"

- **30-421** (Mono)
 - **30-484** (Stereo)
- 3.5 mm Audio Plug with strain relief. 0.19" cable opening.



O.D. 0.16"

- **30-488** (Nickel Plated)
 - **30-488A** (Gold Plated)
- 3.5 mm Stereo Audio Plug with molded strain relief. 0.16" cable opening.



O.D. 0.21"

- **30-489** 3.5 mm stereo Audio Plug. 0.21" cable opening.



O.D. 0.14"

- **30-490** 3.5 mm stereo mini Audio Plug with strain relief. 0.14" cable opening.



O.D. 0.13"

- **30-485** 2.5 mm stereo Audio Plugs with strain relief. 0.13" cable opening.



O.D. 0.15"

- **30-701** (Plastic)
 - **30-701A** (All Metal)
 - **30-702** (Right Angle)
- 4 conductor 3.5mm Audio & Video Male Plug with strain relief. 0.15" cable opening.

AUDIO, VIDEO & POWER CONNECTORS



- **30-296-BK (Male)**
 - **30-297-BK (Female)**
- Locking inline 3.5mm Stereo Audio with black chrome body.



- **30-487 (Stereo)**
 - **30-487A (Mono)**
- Mini inline 3.5 mm stereo Audio Jack with molded strain relief. 0.19" cable opening.



- 30-417**
- 3.5 mm mono inline Female Audio Jack with strain relief. 0.16" cable opening.



- 30-492**
- Mini 3 circuit, 3.5 mm stereo Audio Jack with strain relief. 0.14" cable opening.



- 30-705**
- 4 conductor 3.5mm Audio & Video Female Jack with strain relief. 0.15" cable opening.



- **30-376 (Mono)**
 - **30-386 (Stereo)**
- Right Angle 3.5mm Audio Plug. 0.15" cable opening.



- **30-442 (Black)**
 - **30-443 (Red)**
- Insulated banana plug, 1" molded bakelite handle, 0.2" cable opening.




- **30-605-BK (Black)**
 - **30-605-RD (Red)**
- Solder type banana plug for large cable. Up to 8 awg wire. 0.25" cable opening.



- **30-600-BK (1 PCS Black)**
 - **30-600-RD (1 PCS Black)**
 - **30-600-5PR (5 Pairs, Black & Red)**
- Solderless Banana Plug with Female banana tap. 0.22" cable opening.



- **30-602-BK (1 PCS Black)**
 - **30-602-RD (1 PCS Black)**
 - **30-602-5PR (5 Pairs, Black & Red)**
- Solderless Banana plug with screw adjustment. 0.15" cable opening.



- **30-440 (Red)**
 - **30-441 (Black)**
- Dual banana plug, gold plated. 0.24" cable opening.



- **30-604-BK (Black)**
 - **30-604-RD (Red)**
- Dual gold banana plugs. For up to 8 gauge wire.



- **30-528-BK (Female)**
 - **30-529-BK (Male)**
- 3-pin XLR, twist on strain relief. 0.15" to 0.3" cable opening.



- **30-528-SL (Female)**
 - **30-529-SL (Male)**
- 3-pin XLR, twist on strain relief. 0.15" to 0.3" cable opening.



- **30-534 (Male)**
 - **30-535 (Female)**
- Silver, 4-pin XLR inline connector.



- **30-520-BK (Black)**
 - **30-520-SL (Silver)**
- 3 Pin XLR, Male inline plug. 0.25" cable opening.



- **30-521-BK (Black)**
 - **30-521-SL (Silver)**
- 3-pin XLR, Female inline plug. 0.25" cable opening.



- **30-640-3 (Male)**
 - **30-641-3 (Female)**
- Inline MINI 3 pin XLR plug. 0.17" cable opening.



- **30-451 (3 Pin, Female)**
 - **30-453 (Female)**
 - **30-453M (Male)**
- 4 conductor inline connector. 0.25" cable opening.



- 30-433**
- 5-pin inline 180°, Female DIN Plugs. 0.26" cable opening.



- 30-382**
- In-line solderless Motorola type plug. .26" cable opening.



- **30-373 (Bakelite Barrel)**
 - **30-373P (With Strain Relief)**
- 2.1mm Coax power plug. 0.15" cable opening.



- **30-374 (Bakelite Barrel)**
 - **30-374P (With Strain Relief)**
- 2.5mm Coax power plug. 0.15" cable opening.



- **30-333 (2.1mm)**
 - **30-334 (2.5mm)**
- Coax Inline Female connector. O.D. = 5.5mm. 0.15" cable opening.


CHASSIS MOUNT CONNECTORS




• 30-356 (2.1mm)
• 30-357 (2.5mm)
 Right angle coax power plug with solder terminals. 0.12" cable opening.



• 30-428-COLOR (Nickel Plated)
• 30-428G-COLOR (Gold Plated)
 RCA Audio Jack with hex nut and solder lug. Mounts in 1/4" hole.
AVAILABLE COLORS: BK, BU, GN, OR, RD, WH & YL



30-300-COLOR
 RCA chassis mount Audio Jack. Fits 5/16" hole.
AVAILABLE COLOR BAND ID: BK, BU, GN, OR, RD, WH & YL



• 30-400 (Stereo)
• 30-411 (Mono)
 3 Circuit 1/4" Open, Audio Jack. 0.36" hole size.




30-412-A (Mono)
 Closed Circuit 1/4" Mono Audio Jack. 0.36" hole size.



30-385
 1/4" Stereo Audio Jack. with DPDT normally closed and normally open circuits.



30-422
 3.5 mm miniature closed circuit mono Audio Jack mounts in 1/4" hole. Bushing length 0.17".



30-477
 3.5mm mini stereo Audio Jack. With solderable leads. Bushing length 0.135".



• 30-493A (3.5mm)
• 30-494A (2.5mm)
 Mini or Sub mini stereo Audio Jack. Panel mount. Mounts in 0.25" hole.



30-700A
 4 conductor 3.5mm chassis mount stereo Audio & Video Jack. Mounts in 0.28" hole.



Snap-in chassis mount Audio Jack with solder style terminals. Mounts in 0.375" hole.
• 3.5MM VERSION
• 30-710 (2 Conductor)
• 30-711 (3 Conductor)
• 30-712 (4 Conductor)
• 2.5MM VERSION
• 30-713 (2 Conductor)
• 30-714 (3 Conductor)
• 30-715 (4 Conductor)



• 30-522-BK (3 Pin Black)
• 30-522-SL (3 Pin Silver)
• 30-522-SL-4 (4 Pin)
• 30-522-SL-5 (5 Pin)
 XLR Male chassis plug. 0.75" hole size.



• 30-523-BK (3 Pin Black)
• 30-523-SL (3 Pin Silver)
• 30-523-SL-4 (4 Pin)
• 30-523-SL-5 (5 Pin)
 XLR Female chassis jack. Mounts in 15/16" hole.



30-517
 Isolated plastic Female XLR with protective cover. 3-pin Female XLR, mounts in 15/16" hole.



• 30-452 (3 Pin)
• 30-454 (4 Pin)
 Male chassis plug. 0.62" hole size.



• 30-642-3 (3 Pin)
• 30-642-4 (4 Pin)
• 30-642-5 (5 Pin)
• 30-642-6 (6 Pin)
 Chassis mount MINI XLR Male. Mounts in 0.43" "D" hole.



• 30-643-3 (3 Pin)
• 30-643-4 (4 Pin)
• 30-643-5 (5 Pin)
• 30-643-6 (6 Pin)
 Chassis mount MINI Female XLR. Mounts in 15.20mm, .60 hole.



• 30-310 (2.1mm)
• 30-311 (2.5mm)
 Chassis mount coax power jack. Mounts in 5/16" hole. N/C switch.



30-720-2.1
 2.1mm Chassis mount snap-in coax power jack. Mounts in 0.375" hole.




• 30-314 (2.1mm)
• 30-315 (2.5mm)
 Chassis mount coax power jack. Mounts in 1/2" hole. N/C switch.




• 30-377 (Japan)
• 30-377T (Taiwan)
 2.1mm chassis mount coax power jack. Mounts 7/16" dia. hole.




• 30-378 (Japan)
• 30-378T (Taiwan)
 2.5mm chassis mount coax power jack. Mounts 7/16" dia. hole.

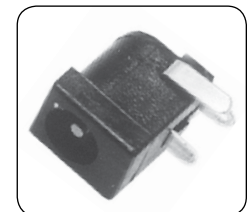

30-370-2.1
 2.5 mm pin, PC mount coax power jack, switched circuit.



- **30-550 (Male)**
- **30-560 (Female)**
(9-way) "D" solder type connector.



- **30-551-HD (Male)**
- **30-561-HD (Female)**
DB-15 high density solder type connector.



- **TS-9 (9 Pin)**
- **TS-15 (15 Pin)**
- **TS-25 (25 Pin)**
Hinged/Thumbscrew Style Hood



- **30-580 (Male)**
- **30-582 (Female)**
- **30-582-M-F (Male to Female)**
DB9 gender changer mini version.




- **30-582-NULL**
9 pin Male to Female Null modem adapter (RS232), Reverses pins 2, 3.




- **30-587 (Female)**
- **30-588 (Male)**
High density "D" connector sockets.




- **30-592-8**
- **30-592-8M (Metal Housing)**
Extender Over Single Cat5e or Cat6 cable. Female DB-9, D-Sub to RJ45 jack with long thumb screws.



- **30-592-KIT**
RS232 Extender Over Single Cat5e or Cat6 cable. Distance's of over 200 Ft. at 9600 baud can be achieved.



- **30-595 (Single)**
- **30-596 (Dual)**
3 Pin XLR Female on a steel plate.



- **30-597 (Single Cutout)**
- **30-597-2 (Dual Cutout)**
DB9 or 15 pin high density "D" gang cutout.



- **30-410-3/8-COLOR (Nickel Plated)**
- **30-410G-3/8-COLOR (Gold Plated)**
RCA to RCA feed-thru Jacks. Mounts in 3/8" hole. AVAILABLE COLORS: BK, BU, GN, OR, RD, WH & YL



- **30-295 (Nickel)**
- **30-295G (Gold)**
3.5mm Stereo feed-thru, Female to Female jack. Mounts in 3/8" hole.



- **30-295-HEX**
3.5mm Stereo feed-thru, Female to Female. Mounts in 3/8" hex nut. Threaded body.



- **30-707**
4 conductor 3.5mm Female feed-thru jacks. Mounts in 1/2" hole.



- **30-524 (Male)**
- **30-525 (Female)**
XLR 3 pin to coupler.



- **30-343**
Coax power plug converter. 2.5mm plug to 2.1 mm jack.



- **30-470**
Coax right angle adapter SO-239 to PL-259.



- **30-472**
Coax double Female connector.

30 SERIES SOLDERLESS CONNECTORS




- **30-410-T-COLOR**
RCA Female to Terminal Block
AVAILABLE COLORS: BU, GN, RD, WH & YL



- **30-295-T (Female)**
- **30-489T (Male)**
3.5mm Stereo to Terminal Block.
ALSO AVAILABLE IN (PCS): 5 & 10



- **30-416T**
3.5mm Mono Male to Terminal Block



- **30-491T**
Panel Mount, 3.5mm 3-Conductor with screw terminals on the back.



- **30-712K-S-2 (As a Pair)**
3.5mm stereo Jack to Screw terminals. For 1/2" chassis mount or keystone insert. 18 to 30 gauge wire.



- **30-333T (Female)**
- **30-373T (Male)**
DC 2.1mm to 2 pin screw terminal block.

AUDIO & VIDEO ADAPTERS

1 (800) 821-8536

PG.7



- **35-462** (1/4" Stereo)
 - **35-450** (1/4" Mono)
- 3 Pin XLR Female jack to 1/4" jack.



- **35-453** (XLR Male)
 - **35-452** (XLR Female)
- 3 Pin XLR to 1/4" mono plug.



- **35-456** (XLR Female)
 - **35-457** (XLR Male)
- 3 Pin XLR to 1/4" stereo plug.



- **35-463** (1/4" Stereo)
 - **35-451** (1/4" Mono)
- 3 Pin XLR Male plug to 1/4" jack.



- **35-454** (XLR Female)
 - **35-455** (XLR Male)
- 3 Pin XLR to RCA type plug.



- **35-460** (XLR Female)
 - **35-461** (XLR Male)
- 3 Pin XLR to RCA jack.



- **35-458** (XLR Female)
 - **35-459** (XLR Male)
- 3 Pin XLR to BNC jack.



- 35-464**
- 3 Pin XLR Female jack to 3 Pin XLR Male plug. Crossing wire for pin 2 and 3.



- **35-467** (XLR Female)
 - **35-469** (XLR Male)
- 3.5mm stereo Female jack to XLR Connector. 8 in. long. Wired: pin 1-ground, pin 2-tip, pin 3-ring.




- 35-468**
- 3.5mm stereo Female jack to XLR Male Plug. 8 in. long. Wired: pin 1&3-ground, pin 2-tip.



- **35-480** (Teflon)
 - **35-511G** (Plastic)
- Right angle RCA Male to Female adapter, gold plating.



- 35-482**
- Right angle RCA plug to two RCA jacks with teflon insulator.



- 35-504**
- Shielded "Y", RCA plug to two RCA jacks in parallel.




- **35-539-P** (Plastic)
 - **35-539** (Metal)
- 3.5 mm mono jack to RCA-type pin plug.



- **35-545** (Plastic)
 - **35-546G** (Gold)
 - **35-546-NK** (Nickel)
- Female to Female RCA coupler.



- 35-548-NK**
- Male to Male RCA plugs.



- 35-569**
- Dual RCA Female barrel jacks.



- 35-502G**
- Triple RCA jacks, Composite Audio Video coupler.



- 35-510G**
- Triple RCA jacks, Component Video Coupler.




- 35-537**
- 1/4" mono jack to RCA-type plug.



- **35-517** (Plastic)
 - **35-517-RT** (Plastic, Right Angle)
 - **35-549** (Gold)
 - **35-549-NK** (Nickel)
- RCA-type jack to 1/4" mono plug.



- 35-586G**
- Shielded "Y", 3.5 mm stereo plug to two RCA jacks.



- **35-538-P** (Plastic)
 - **35-538** (Metal)
- RCA-type pin jack to miniature 3.5 mm mono plug.



- **35-506** (Nickel)
 - **35-506-P** (Plastic)
- 1/4" mono jack to 3.5mm mono plug.



• **35-580 (Mono)**
• **35-580A (Stereo)**
Barrel connector,
1/4" Female to Female.



• **35-550 (1/4" Stereo)**
• **35-564 (1/4" Mono)**
1/4" plug to 3.5mm
stereo mini jack.



35-536
3.5mm mono jack to
1/4" mono plug.



35-551
Stereo mini 3.5 mm
plug to 1/4" jack.



35-552
3.5mm mono plug to
3.5mm stereo mini jack.



35-565
3.5mm mono jack to
3.5mm stereo plug.



35-484A
Right angle stereo
3.5 mm female jack to
3.5 mm male plug.



• **35-544 (Mono)**
• **35-581 (Stereo)**
Barrel connector,
3.5 mm jack coupler.



35-441
Fiber-optic tolink
Female coupler. Over
all length .72".



35-496-4
Female to Female
mini-din coupler,
plastic body.



• **35-704 (Exits Up)**
• **35-704A (Exits Down)**
Right Angle 15 pin
VGA Male to
Female adapter.



35-705
VGA Female to
Female panel
mount, 6 in. long.



35-710A
DVI-i to DVI-i Female
to Female Coupler.



• **35-711A**
(Female to Male)
• **35-712A**
(Male to Female)
HDMI to DVI-D Adapter



• **35-715**
(Female to Male)
• **35-716**
(Male to Female)
HDMI to DVI-D Cable
adapter. 6 in. long.



• **35-707**
(6 in., Panel Mount)
• **35-708**
(Chassis Feed-thru)
HDMI Female to
HDMI Female



• **35-714**
(Up 90 Degrees)
• **35-714A**
(Down 270 Degrees)
Right Angle HDMI
Female to Male adapter.
ALSO AVAILABLE IN (PCS):
5 & 10



• **35-709**
(Vertical Up)
• **35-709A**
(Vertical Down)
Right Angle HDMI Male
to Female. Unique
flat on side design.
ALSO AVAILABLE IN (PCS):
5 & 10



• **35-713-A (1 PCS)**
• **35-713-A-5 (5 PCS)**
• **35-713-A-10**
(10 PCS)
HDMI Female to
Female inline Coupler



35-719
HDMI Male (Type A) to
HDMI Female (Type A)
Swivel Adapter, 360
Degree Turn .



35-734 (6 in.)
HDMI Male
(Type A) to HDMI
Female (Type A).



HDMI FEMALE
MINI HDMI TYPE C
35-728
HDMI Female to
Mini HDMI-C Male
adaptor. cable.
6 in. long.



4K ULTRA HD
72-157
60Hz **ACTIVE**
4K@60Hz, Active
USB 'C' to HDMI
Female Adapter.
8 in. long.



ACTIVE
35-724
Male Mini DISPLAYPORT
to Female
HDMI Adapter

35 SERIES

SALES-TECH SUPPORT:

E-Mail: techsupport@calrad.com
Hours: Monday-Friday, 8:00am - 4:00pm (PST)

AUDIO & VIDEO ADAPTERS

1 (800) 821-8536

PG.9



ACTIVE

35-731

Male Mini DISPLAYPORT to DVI Female adapter. 7 inch long.



ACTIVE

35-732

Male Mini DISPLAYPORT to VGA Female adapter. 2.5 inch long.



ACTIVE

• **35-739 (Mini DisplayPort)**
• **35-740 (DisplayPort)**
3 in 1 Adapter Converts DISPLAYPORT to HDMI, DVI or VGA



ACTIVE

35-738

Male DISPLAYPORT to VGA Female adapter. 2.5 inch long.



• **35-726**

• **35-726-8IN**
(8 in. Cable, ACTIVE)
HDMI Female to Male DISPLAYPORT adapter.




• **35-727**

• **35-727-8IN**
(8 in. Cable, ACTIVE)
DVI Female to Male DISPLAYPORT adapter.



35-729

Female DISPLAYPORT adapter. Panel Mount




• **35-525 (RCA Male)**
• **35-578 (RCA Female)**
Shielded "Y" Cable, RCA to two RCA female jacks. 10 in. long.



35-525-HG

High Grade Dual RCA Female Jacks to Single RCA Male Plug. 6 in Long.




35-530

Shielded "Y" Cable, RCA female jack to two RCA male plugs. 10 in. long.



35-530-HG

High Grade Dual RCA Male Plugs to Single RCA Female Jack. 6 in Long.



35-531 (Mono Male)
35-559 (Stereo Male)
Shielded "Y" Cable, 3.5mm male plug to two 3.5mm Mono female jacks. 10.5 in. long.



35-555

Shielded "Y" Cable, Stereo, 3.5mm male plug to two 3.5mm female jacks. 10 in. long.



35-557

Shielded "Y" Cable, 3.5mm Stereo male plug to two RCA female jacks. 10 in. long.



• **35-558 (3.5mm Female)**

• **35-562 (3.5mm Male)**
Shielded "Y" Cable, 3.5mm Stereo to two RCA male plugs. 10 in. long.



35-478

Shielded "Y" Cable, 3.5mm Mono female jack to two RCA female jacks. 10 in. long.



35-572

Shielded "Y" Cable, Mono, 3.5mm female plug to two 3.5mm male plugs. 10 in. long.



35-501A

Shielded "Y" Cable, Stereo, 1/4" male plug to two 1/4" female jacks. 3 Ft. long.

40 SERIES AUDIO & VIDEO EXTENDERS



FULL HD 1080p

UP TO 1000FT

40-204

2 Wire Transmitter and Receiver Pair with IR, RS232, 1080p



FULL HD 1080p

QAM

40-101 (Gen 3)

1080p, 2500 Ft., HDMI Qam 100 Channel Transmitter & Receiver Modulator System with IR



FULL HD 1080p

40-214A

1080p, 1000 Ft., HDMI HDTV Digital ATSC 56 Channel RF Modulator



4K ULTRA HD

30Hz

40-2010

4K x 2K, 1080p, 3D, HDBASET, HDMI & IR Balun Over Single Cat5e/Cat6 Cable



FULL HD 1080p

40-2000

1080p, 3D, HDMI Over Single Cat 5e/6 Cable



FULL HD 1080p

40-2000-IR (With IR)

1080p, 3D, HDMI & IR Balun Over Single Cat 5e/6 Cable



UP TO 250FT

40-7110

VGA Video and Stereo Audio Balun Over Single Cat5e/6 Cable



UP TO 900FT

40-DAB-1

Digital Audio Balun Over Single Cat 5e/6 cable, Toslink | Digital | Coaxial



UP TO 250FT

95-1046-S-1

Stereo RCA Audio Balun with RS232, IR, 16 Inches Long. Over Single Cat 5e/6 Cable.



40-DA02

Audio Video Balanced Passive Signal Converter Over UTP Cable, 8 in. long.



FULL HD 1080p

40-EDID

1080p, HDMI Emulator EDID/CEC Selector



4K ULTRA HD

60Hz

40-HDMI-EXT-A

4K@60Hz, YUV 4:4:4, HDR, HDMI Audio Extractor.



40-936B (1 x 4)

1 x 4 Composite \ SVHS Video Stereo Audio Distribution Amplifier



40-937B (1 x 4)

1 x 4 Component Video Stereo Audio Distribution Amplifier



40-809-8 (1 x 8)

1 x 8 Composite Video & Audio Distribution Amplifier



4K ULTRA HD

30Hz

HDR

- **40-1063-HS-2 (1 x 2)**
 - **40-1063-HS-4 (1 x 4)**
 - **40-1063-HS-8 (1 x 8)**
- 4K x 2K, YUV 4:4:4, HDR, 3D, 1080p, HDMI Distribution Amplifier.



FULL HD 1080p

40-1061-HS-2 (1 x 2)
1080p, 3D, 1 x 2 Compact HDMI Distribution Amplifier



4K ULTRA HD

30Hz

40-967M (4 x 2)
4K@30Hz 1080p, 3D, 4 x 2 HDMI Matrix Switcher



FULL HD 1080p

40-992-HS (3 x 1)
1080p, 3 x 1 HDMI Switcher with IR



4K ULTRA HD

40-999-HS (4 x 1)
4K x 2K, 4 x 1 HDMI Switcher with IR

AUDIO & VIDEO CONVERTERS



ACTIVE

40-TL4 (2 x 4)
Toslink Digital Audio
Switcher/Splitter



40-DAC-D
Optical to Analog Converter
with Dolby or PCM



40-DCT-1-E
Toslink Digital to Analog
Audio Converter (PCM Only)



40-DCT-2
2 Way Digital Audio Converter,
Repeater (SPDIF to Toslink,
Toslink to SPDIF)



40-DCT-9
Universal Digital Analog
Audio Converter
Toslink | Digital | Coaxial | Analog



10-119
TOSLINK Optical to
SPDIF* Digital Coaxial
Signal Converter



40-289
HDMI to Component
Video & Audio Converter



40-284-A
HDMI to VGA Video
Converter, 1 Ft. long.



40-40VH02
1080p, 720p, VGA with
3.5mm Stereo Audio
to HDMI Converter



40-281H
Component Video & Audio
to HDMI Converter




40-286
HDMI to Composite
Video, Stereo Audio &
S-Video Converter



40-720PHD
Composite Video/
S-Video To HDMI
Converter



40-889
Composite Video to VGA
Converter (640 x 480)

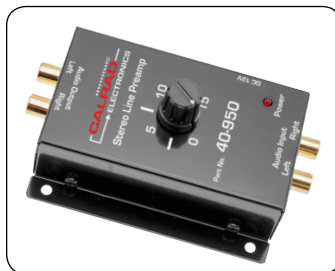

40-950
Stereo Audio Line Pre
Amplifier with Volume
Control, 10dB.




40-BT4
2 IN 1, Portable Bluetooth
v3.0, Plus EDR, Stereo
Transmitter & Receiver.



40-106
6 Port USB Power Supply,
5Vdc-8Amps

Dolby products are trademarks of Dolby Laboratories, registered in the U.S. and other countries. The content of this brochure is not supplied or reviewed by Dolby Laboratories.



42-114
USB (Type A) to Triple Charge; 8 Pin Lightning Cable, 30 Pin & Micro USB



• **42-140** (White with MIC)
• **42-141** (White)
• **42-142** (Black)
Stereo Earphones, 3 Ft. Long Cord.



42-221
8 Pin Lighting Plug to 8 Pin Lighting Jack and 3.5mm Stereo Jack. 8 in. Long.



42-116-LENGTH
USB (Type A) to 8 Pin Lighting cable. **Apple Certified.**
AVAILABLE LENGTHS (FT.): 3 & 6.



72-265-LENGTH
USB (Type A) to Micro (Type B) Cable. **AVAILABLE LENGTHS (FT.): 3, 6, 10 & 15.**



42-CAR-3
Dual Type "A" USB Car Charger, 2 Amp, 5V DC.

45 SERIES POWER SUPPLIES



42-AC-4
Dual Type "A" USB AC Charger, 2 Amp, 5V DC.



45-602-2AMP
2.1mm Coax Plug, 12V DC, 2 Amp Regulated Power Supply




45-600
2.1mm Coax Plug, 12Vdc, 1 Amp Switchmode DC Regulated Power Supply



45-776
2.1mm Coax Plug, 9V AC, 1 Amp Power Supply



45-762
2.1mm Coax Plug, 24V DC, 600 mA Power Supply

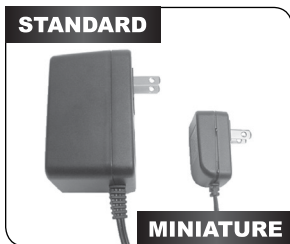

45-650-VOLTAGE
2.1mm coax plug, UL Listed Un-Regulated Miniature Power Adapters
AVAILABLE VOLTAGE (Vdc): 3, 4.5, 6, 7.5, 9, 12, 15, 18 & 24



• **45-608-HG** (6 Amp)
• **45-608** (5 Amp)
12Vdc, L.E.D. Lighting Power Supply



45-749
DC to DC Multi-Converter for Cars. 12 Vdc. input to 3V, 4.5V, 6V, 7.5V, 9V, 12V at 2 Amp output.




45-755
In wall DC Multi-Converter. 12 Vdc. input to 3V, 4.5V, 6V, 7.5V, 9V, 12V at 1 Amp output.



45-820
Cigarette Lighter Plug with Multi Plugs



45-821
Fused lighter plug with LED indicator to 2.1mm right angle coax plug, 6 Ft.

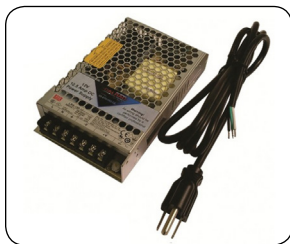

• **45-609-HG-UL** (350W/29 Amp)
• **45-610-HG-UL** (150W/12.5 Amp)
Single Output Slimline 12Vdc Switching Power Supply



• **45-625-HG-UL** (211W/8.8 Amp)
• **45-626-HG-UL** (350W/14.6 Amp)
Single Output Slimline 24Vdc Switching Power Supply




• **45-822** (6 Ft., Straight)
• **45-822-RT-6** (6 Ft., Right Angle)
• **45-822-RT-10** (10 Ft., Right Angle)
Indoor 2-Prong standard AC extension cord.



45-824
Polarized AC power cord with square/round end, 18 Awg.


TV WALL MOUNTS



66 LBS

47-108-A


Full Motion Swivel and Tilt Arm Wall Mount. Fits 13"-27" LED or LCD flat panel TVs.



66 LBS

47-109


Full Motion Swivel and Tilt Arm Wall Mount. Fits 23"-42" LED or LCD flat panel TVs.

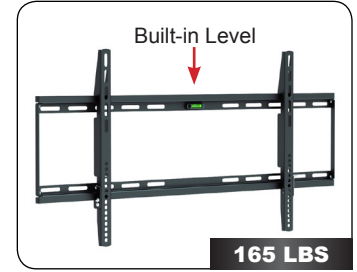

165 LBS

47-110

LCD, Plasma Display Wall Mount. Fits 37"-70" LED or LCD flat panel TVs.

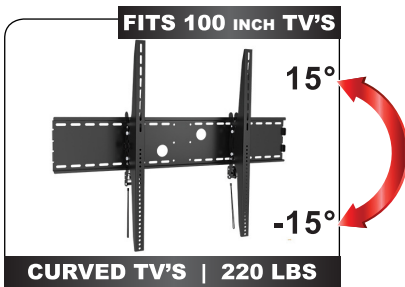

FITS 100 INCH TV'S


15°

-15°

CURVED TV'S | 220 LBS

47-111

X-Large Heavy-Duty Tilting Wall Mount. Fits 60"-100" Curved & Flat panel TVs.

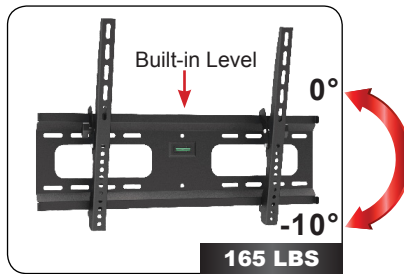

Built-in Level

0°

-10°

165 LBS

47-116


Tilting Wall Mount, fits 37"-70" L.E.D, LCD or Plasma televisions.



132 LBS

47-120


Full Motion Tilt and Swivel Wall Mount Bracket Dual Articulating Arm. Fits 37"-70" LED or LCD flat panel TVs.



154 LBS

47-300

Fixed TV Wall Mount for Vertical Mounting of Displays, (Digital Signage). Fits 37"-70" LED or LCD flat panel TVs.



Industrial strength Rubber bands for various size media devices

47-130

Universal TV Media Box Mounting Kit



47-130-IR

IR repeater kit for 47-130 apple TV mount, powered from most TV displays, (Black).



80-574

Stereo Phono Pre Amplifier to Line Level



6.8 Oz

80-515

LCD screen cleaner. Includes soft cloth suited for delicate screens, 6.8 ounces.



1.18 Oz

80-516


LCD screen cleaner. Includes soft cloth suited for delicate screens, 1.18 ounces.



55-646-S-LENGTH
Ultra Thin HDMI Male (Type A) to Male (Mini Type C).
AVAILABLE LENGTHS (m):
0.5, 1 & 2.



55-647-S-LENGTH
Ultra Thin HDMI Male (Type A) to Male (Micro Type D).
AVAILABLE LENGTHS (m):
0.5, 1 & 2.



4K ULTRA HD
60Hz
55-658-S-LENGTH
4K Ultra HD, Ultra Thin HDMI Connector (Type A) with Latch Style Plugs.
AVAILABLE LENGTHS (m):
0.5, 1, 2 & (10, 15 Ft.)



4K ULTRA HD
60Hz
55-668-PR-LENGTH
Premium HDMI Cable 4K Ultra HD, UL, cUL, CL3, FT4.
AVAILABLE IN (Ft):
3, 6, 10 & 15.



55-668-LENGTH
HDMI Cable, 4K Ultra HD, UL, cUL, CL3, FT4
AVAILABLE LENGTHS (Ft.):
1, 3, 6, 10, 15, 25, 35, 50 & (75, 100 Amplified).



55-644A-HS-6-IN
Male to Female HDMI cable with 90 degree vertical rotating connectors. 6 in. long.



55-628-LENGTH
DVI-D Male to HDMI Male Cable
AVAILABLE LENGTHS (Ft.):
3, 6, 10, 15, 25, & 50.



55-645-LENGTH
HDMI (Micro Type D) to HDMI (Type A) Male
AVAILABLE LENGTHS (Ft.):
3 & 6.



4K ULTRA HD
60Hz
72-158-LENGTH
4K@60Hz, Active USB 'C' to HDMI Male Adapter Cable.
AVAILABLE LENGTHS (Ft.):
3, 6 & 10.



55-649-LENGTH
Male Mini DISPLAYPORT to HDMI Male Cable.
AVAILABLE LENGTHS (Ft.):
3, 6, 10 & 15.



55-651-LENGTH
DISPLAYPORT Male to HDMI Male Cable
AVAILABLE LENGTHS (Ft.):
6, 10 & 15.



55-652-LENGTH
Male DISPLAYPORT to Male DISPLAYPORT Cable.
AVAILABLE LENGTHS (Ft.):
3, 6, 10, 15 & 25.



4K ULTRA HD
60Hz
55-652M-LENGTH
4K@60Hz, Male DISPLAYPORT to Male DISPLAYPORT Cable.
AVAILABLE LENGTHS (Ft.):
3, 6, 10, 15 & 25.



55-612-LENGTH
Shielded High Quality SVGA Cable, Male to Male.
AVAILABLE LENGTHS (Ft.):
3, 6, 10, 12, 15, 25, 35, 50, 75 & 100.




55-613M-LENGTH
Molded SVGA & 3.5mm Stereo Audio Cable, Male to Male.
AVAILABLE LENGTHS (Ft.):
3, 6, 15, 25, 35 & 50.



55-1050-LENGTH
CCTV Video Plus Power Siamese Cable
AVAILABLE LENGTHS (Ft.):
25, 50, 75, 100 & 150.



55-879-75-LENGTH
BNC Male to Male 75 Ohm Coax Video/CCTV Cable RG-59 A/U
AVAILABLE LENGTHS (Ft.):
3, 6, 12, 25, 50, 75 & 100.



55-862B-LENGTH
75ohm, Composite Video cable and Stereo Audio, Interface Dubbing cable.
AVAILABLE LENGTHS (Ft.):
3, 6, 12, 20, 25 & 50.



RG6 COAX CABLE
RG6 coax cable with molded Male "F" connectors each end.
AVAILABLE LENGTHS (Ft.):
● 55-790 (3 Ft.) ● 55-794 (25 Ft.)
● 55-791 (6 Ft.) ● 55-795 (50 Ft.)
● 55-792 (12 Ft.) ● 55-796 (75 Ft.)
● 55-793 (15 Ft.) ● 55-797 (100 Ft.)



RG59 COAX CABLE
RG59 coax cable with molded Male "F" connectors each end.
AVAILABLE LENGTHS (Ft.):
● 55-882-1 (1 Ft.) ● 55-885 (25 Ft.)
● 55-882-2 (2 Ft.) ● 55-886 (50 Ft.)
● 55-882 (3 Ft.) ● 55-888 (75 Ft.)
● 55-883 (6 Ft.) ● 55-887 (100 Ft.)
● 55-884 (12 Ft.)

AUDIO CABLES

1 (800) 821-8536

PG.15



55-500-LENGTH
2.2mm fiber optic cable, Toslink to Toslink for Digital Audio.
AVAILABLE LENGTHS (m): 1, 2, 3, 4 & 5.



55-504-LENGTH
5mm spring loaded fiber optic cable, Toslink to Toslink for Digital Audio.
AVAILABLE LENGTHS (m): 1, 2, 3, 4 & 5.



55-502-50
5mm fiber optic cable, Toslink to Toslink for Digital Audio. Use with our 10-117 Fiber Optic amplifier. 50 Ft. long.



Shielded, 1/4" Mono plug on each end.
AVAILABLE LENGTHS (Ft.):
● 55-856 (6 Ft.)
● 55-857 (15 Ft.)



Shielded, 1/4" Stereo plug on each end.
AVAILABLE LENGTHS (Ft.):
● 55-853 (6 Ft.)
● 55-854 (15 Ft.)
● 55-855 (25 Ft.)



55-936-LENGTH
3.5 mm Stereo male plug to 1/4" Mono male plug.
AVAILABLE LENGTHS (Ft.): 3, 6 & 10.



Mono, 3.5 mm male plug to 1/4" male plug.
AVAILABLE LENGTHS (Ft.):
● 55-948 (6 Ft.)
● 55-964 (10 Ft.)



● 55-946
● 55-946-RT (Right Angle Plug)
3.5mm Mono male plug to stripped & tinned leads. 6 Ft. long.



3.5mm Mono plug on each end.
AVAILABLE LENGTHS (Ft.):
● 55-940 (3 Ft.)
● 55-941 (6 Ft.)
● 55-942 (10 Ft.)



55-897-LENGTH
3.5 mm Stereo Male plug on each end.
AVAILABLE LENGTHS (Ft.): 2, 3, 4, 6, 12, 20, 25 & 50.




55-921-LENGTH
Stereo, 3.5 mm male plug to 3.5 mm female jack.
AVAILABLE LENGTHS (Ft.): 3, 6, 12 & 25.



Mono, 3.5 mm male plug to 3.5 mm female jack.
AVAILABLE LENGTHS (Ft.):
● 55-953 (10 Ft.)
● 55-961 (20 Ft.)




55-949
3.5 mm Mono plug to RCA plug. 6 Ft. long.



55-899-LENGTH
3.5 mm Stereo male plug to two RCA Male plugs.
AVAILABLE LENGTHS (Ft.): 3, 6, 12 & 25.



● 55-934 (Male to Male)
● 55-983 (Male to Female)
RCA to RCA Extension Cable. 6 Ft. long.



STEREO AUDIO CABLES

Dual RCA Male plugs at each end.
Flat zip style cable.

AVAILABLE LENGTHS (Ft.):

- 55-924 (1 Ft.)
- 55-923 (3 Ft.)
- 55-998 (4 Ft.)
- 55-999 (6 Ft.)
- 55-1000 (10 Ft.)
- 55-1000B-12 (12 Ft.)
- 55-1000B-15 (15 Ft.)
- 55-1001 (20 Ft.)
- 55-1002 (25 Ft.)
- 55-1000B-35 (35 Ft.)
- 55-1000B-50 (50 Ft.)
- 55-1000B-75 (75 Ft.)
- 55-1000B-100 (100 Ft.)

55 SERIES HIGH GRADE AUDIO CABLES



55-897-HG-LENGTH
High Grade Single 3.5mm Male to Male.
AVAILABLE LENGTHS (Ft.): 3 & 6.



55-899-HG-LENGTH
High Grade Dual RCA Males to Single 3.5mm Male.
AVAILABLE LENGTHS (Ft.): 3 & 6.



35-525-HG
High Grade Dual RCA Female Jacks to Single RCA Male Plug. 6 in Long.



35-530-HG
High Grade Dual RCA Male Plugs to Single RCA Female Jack. 6 in Long.




55-700-HG-LENGTH
High Grade Dual RCA Males to Males.
AVAILABLE LENGTHS (Ft.): 1.5, 3, 6, 10 & 15.




55-710-HG-LENGTH
High Grade Single RCA Male to Male.
AVAILABLE LENGTHS (Ft.): 1.5, 3, 6 & 10.




• **55-782-LENGTH**
(Male AC to Female IEC)
• **55-782F-32IN**
(32 in. Female AC to Female IEC)
3-Prong AC to IEC
Computer Power Cable
AVAILABLE LENGTHS (FT.):
1, 1.5, 2, 3, 6 & 12.

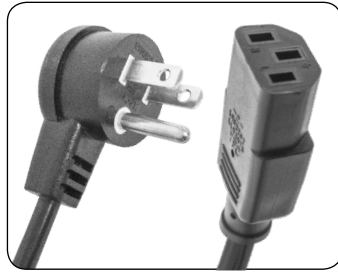


• **55-782RT-LENGTH**
(Right Angle Male AC
to Female IEC)
• **55-782-RT-RT-LENGTH**
(Right Angle Male AC to
Right Angle Female IEC)
3-Prong AC to IEC
Computer Power Cable
AVAILABLE LENGTHS (FT.):
1.5, 2, 3, 6 & 12.

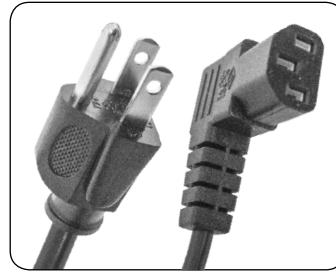

55-785-LENGTH
3-Prong Male AC to
Right Angle Female IEC
Computer Power Cable
AVAILABLE LENGTHS (FT.):
3 & 6.

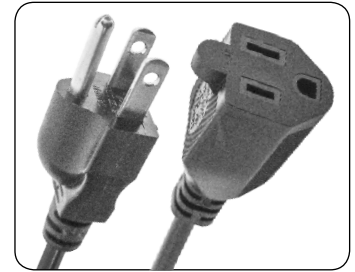

55-788-LENGTH
3-Prong AC Extension
Cable, Male to Female.
AVAILABLE LENGTHS (FT.):
6 in., 1, 3, 6, 10, 15 & 25.

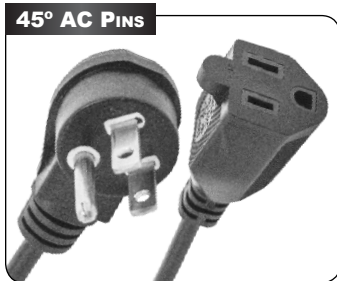


45° AC PINS
55-789-RT-LENGTH
Right Angle 3-Prong
AC Extension Cable, Male
(45° AC PINS) to Female.
AVAILABLE LENGTHS (FT.):
6 in. & 1.



45° AC PINS
55-788A-RT
AC "Y" Splitter Cord.
One Right Angle Male
(45° AC PINS) to two
Females, 18 Inch long.



• **55-788A** (1 Ft.)
• **55-788A-LENGTH**
AC "Y" Splitter Cord.
One Male to two Females.
AVAILABLE LENGTHS (FT.): 3 & 6.

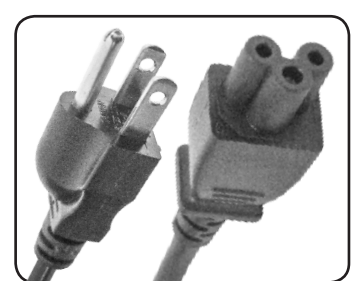

55-779-LENGTH
3-Prong AC Plug to
Notebook (IEC C5) Power
Cable. (18 gauge)
AVAILABLE LENGTHS (FT.):
6 & 10.




55-788B
3-Prong AC Extension Cable,
Female to Right Angle Male
with Female, 6 in. long.
(18 Gauge)



55-781
3-Prong AC Female
to IEC Male Adapter.




55-780
3-Prong Stripped and Tinned
end, 16 Gauge Wire, 6 Ft. long.

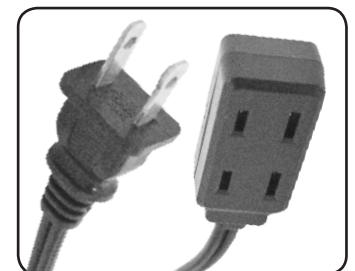


55-786-LENGTH
UL Listed, Indoor 2-Prong
Standard AC Extension Cord
with Dual Sided Jacks. (16 Gauge)
AVAILABLE LENGTHS (FT.):
3, 6, 10, 15 & 25.

NETWORK PRODUCTS




- **70-392-PCS**
 - **70-392J-PCS** (Gel Filled)
- "Jellybean" Style Interconnects
AVAILABLE IN (PCS):
 25, 100 & 1000.




- 72-104-COLOR**
 RJ45 Snagless Rubber Boot
AVAILABLE COLORS:
 BK, BU, GN, GY, IV, OR, RD, WH & YL




- **72-109** (Cat 5e)
 - **72-109-CAT6** (Cat 6)
- UTP Inline RJ45 Coupler



- 72-102-COLOR-E90**
 RJ45 Enhanced 90° Keystone Jack Insert
AVAILABLE COLORS: BK, BU, GN, OR, RD, WH & YL.




- 72-400-COLOR**
 UL 1GHz RJ45 Broadband 90° Cat 6 Keystone Jack Insert
AVAILABLE COLORS: AL, BK, BU, GN, IV, OR, RD, WH & YL




- 72-306**
 RJ12, 6 pin Female to Female feed-thru keystone jack insert.




- **72-305-E** (Cat 5e)
 - **72-305E-6** (Cat 6)
- RJ45 Female to Female feed-thru keystone insert.



- 72-310-COLOR**
 Recessed 3.5mm stereo Female to Female keystone feed-thru jack.
AVAILABLE COLORS: BK, BU, GN, IV, RD & WH



- 72-213-COLOR**
 Blank insert for use with Calrad Keystone cavity wall plates.
AVAILABLE COLORS: AL, IV & WH



- 72-233-PORTS-COLOR**
 Keystone Wall Plate Inserts
AVAILABLE PORTS: 1, 2, 3, 4 & 6
AVAILABLE COLORS: IV & WH



- **72-198** (6 Ft.)
 - **72-198-10** (10 Ft.)
- Samsung RS232 EX-Link for New 4K Samsung TV



- 72-171**
 RJ45 to Screw Terminal Adaptor with flat head Screwdriver.



- **72-110-LENGTH-COLOR** (350MHz, Cat 5e)
 - **72-111-LENGTH-COLOR** (1GHz, Cat 6)
- RJ45 Snagless Ethernet Cable. UL high performance, stranded hi-flex conductors.

AVAILABLE LENGTHS (FT.):

1, 3, 5, 7, 10, 14, 25, 50 & 100.

AVAILABLE COLORS: BK, BU, GN, GY, RD, WH & YL.



- **72-172** (Male)
 - **72-173** (Female)
- RJ45 to 8 Position Terminal Block, 6 in. Pigtail Cable




- 72-RJ45-T**
 RJ45 Male to 8 Position Terminal Block, 6 in. Pigtail Cable. Includes Rubber Strain Relief and Cable Tie



- 72-RJ45-F-T**
 RJ45 Female to 8 Position Terminal Block, 6 in. Pigtail Cable. Includes Rubber Strain Relief and Cable Tie.



- **72-204** (4 Port)
 - **72-208** (8 Port)
- 60 Watt, 48Vdc, POE 100Mb Network Switch.



- **72-497R-25** (Cat 5e)
 - **72-498R-25** (Cat 6)
- RJ45 8-pin, round. Modular plugs. (25 per pack)



- 72-491P-PCS**
 Pass through RJ45 Cat5e Connectors. The RJ45 Cat6 Connectors come in a plastic jar.
AVAILABLE IN (PCS):
 10, 50 & 100.



- 72-491SH-PCS**
 Pass through **Shielded** RJ45 Cat6 Connectors. The RJ45 Cat6 Connectors come in a plastic jar.
AVAILABLE IN (PCS):
 10, 50 & 100.



- 72-495C-PCS**
 Pass through RJ45 Cat5e Connectors. The RJ45 Cat5e Connectors come in a plastic jar.
AVAILABLE IN (PCS):
 10, 50 & 100.



- 72-495SH-PCS**
 Pass through **Shielded** RJ45 Cat5e Connectors. The RJ45 Cat5e Connectors come in a plastic jar.
AVAILABLE IN (PCS):
 10, 50 & 100.



- 72-RJ45TOOL**
 Cat5e, Cat6 Connector Crimping Tool. End Pass through Crimp Cutter.



72-128-LENGTH
Embedded USB transceiver cable prevents signal loss. Extends the cable length of any USB device.
AVAILABLE LENGTHS (FT.):
16 & 26.




72-126-LENGTH
USB 2.0 Male (Type A) to Male (Type B) cable.
AVAILABLE LENGTHS (FT.):
3, 6, 10, 12 & 15.



72-127-LENGTH
USB 2.0 Male (Type A) to Female (Type A) cable.
AVAILABLE LENGTHS (FT.):
3, 6, 10 & 15.



72-125-LENGTH
USB 2.0 (Type A) to (Type A) cable
AVAILABLE LENGTHS (FT.):
3, 6, 10 & 15.



• **72-138-2.1** (2.1mm)
• **72-138-2.5** (2.5mm)
Dual USB (Type A) to Coaxial Plug. Enables power to a 5Vdc device. Up to 1 Amp.



72-501
USB Type 'A' Low Voltage Keystone Insert, Powered Over UTP Cable. Perfect for Phones & Tablets.



72-260-LENGTH
Mini USB 5 Pin Male to USB (Type A) Cable.
AVAILABLE LENGTHS (FT.):
3, 6, 10 & 15.



72-265-LENGTH
USB (Type A) to Micro (Type B) Cable.
AVAILABLE LENGTHS (FT.):
3, 6, 10 & 15.



72-253
Female to Female (Type A) USB Adapter



72-144
10 Port USB 2.0 Hub



72-133 (320 Ft.)
4 Port USB 2.0 Extender Over UTP Cat 5e, Cat 6



72-132
USB 2.0 Extender, Over Single Cat5/6 Cable. Extend USB "A" devices up to 150 Ft.

72 SERIES USB 3.0 ADAPTERS & CABLES



72-134-LENGTH
Super Speed USB 3.0 (Type A) Male to Micro (Type B) Male Cable.
AVAILABLE LENGTHS (FT.):
3, 6, 10 & 15.



72-136-LENGTH
Super Speed USB 3.0 (Type A) Male to (Type B) Male Cable.
AVAILABLE LENGTHS (FT.):
3, 6, 10 & 15.



72-135-LENGTH
Super Speed USB 3.0 (Type A) Male to (Type A) Male Cable.
AVAILABLE LENGTHS (FT.):
3, 6, 10 & 15.



72-154-3
USB 3.0 (Type C) Male to USB (Micro B) Male Cable, 3 Ft. long.



72-156-LENGTH
USB 3.0 (Type C) Male to Male Cable.
AVAILABLE LENGTHS (FT.):
3 & 6.



72-155-LENGTH
USB 3.0 (Type C) Male to USB 3.0 (Type A) Male Cable.
AVAILABLE LENGTHS (FT.):
1, 3 & 6.



72-275
USB 3.0 Type 'C' Male to USB 3.0 Type 'A' Female Adapter



72-276
USB 3.0 Type 'C' Male to USB Micro Type 'B' Female Adapter



72-277
USB 3.0 Type 'A' Male to USB Type 'C' Female Adapter



72-158-LENGTH
4K@60Hz, Active USB 'C' to HDMI Adapter Cable.
AVAILABLE LENGTHS (FT.):
3, 6 & 10.



72-157
4K@60Hz, Active USB 'C' to HDMI Female Adapter.
8 in. long.



72-147
4 Port Compact USB 3.0 Hub with On/Off Switch

ADAPTERS & CONNECTORS: RF & BNC

1 (800) 821-8536

PG.19



75-504-D
Digital CATV
Ground Isolator



75-549-T
BNC Male to Solderless
two Terminal Adapter




75-609 (50 ohm)
75-682 (75 ohm)
BNC crimp on for
RG-59 cable. 2 piece.



75-613 (50 ohm)
75-683 (75 ohm)
BNC crimp on for
RG-6 cable. 2 piece.




75-555 (50 ohm)
75-681 (75 ohm)
BNC crimp on for
RG-59 cable. 3 piece.



75-611 (50 ohm)
75-607 (75 ohm)
BNC crimp for RG-58
cable. 3 piece.



75-608-2PK
Twist-on connector
for RG-6. 2 per pack.



75-713-HG-OUTPUT
Digital Splitter, All Ports
Power Pass, 5-2400 MHz
AVAILABLE OUTPUTS:
2, 3, 4, 6 & 8.



75-568
RF Male terminator.
Easy finger grip design
and solid center pin.



1 GHz
3 GHz
• **75-750-1 (1 GHz)**
• **75-750-2 (2 GHz)**
• **75-750-3 (3 GHz)**
F-81 Feed-thrus.
3/8" Panel Mount.



• **75-520**
• **75-520-WH**
(With Hardware)
F-81C type coupler.
"F" to "F" type coupler



75-565
"F" Male to Male
Adapter.



75-535
Right angle
adapter. "F" Male
to "F" Female.



75-698 (75 ohm)
BNC Female to
"F" Male.



75-517
"F" Female to
BNC Male adapter.



75-535-PO
Right angle,
push-on "F" Male
to "F" Female.



75-518
"F" Female fitting
to male RCA type
plug adapter.



• **75-548 (50 ohm)**
• **75-695 (75 ohm)**
BNC female to
RCA male.



• **75-547 (50 ohm)**
• **75-694 (75 ohm)**
BNC Male to
RCA Female.



75-521-3/8
BNC Female to RCA
Female. Mounts
in 0.375" hole.



75-553
3.5 mm mini phone
plug to BNC
Female adapter.



• **75-600 (50 ohm)**
• **75-601 (75 ohm)**
5%, BNC Terminator



• **75-552 (50 ohm)**
• **75-696 (75 ohm)**
BNC Female to
Female panel mount.
Mounts in 0.5" D hole.



• **75-546 (50 ohm)**
• **75-692 (75 ohm)**
BNC Female to
BNC Female.



• **75-562 (50 ohm)**
• **75-699 (75 ohm)**
BNC Male to
BNC Male adapter.
Overall length: 1.25".



• **75-561 (50 ohm)**
• **75-693 (75 ohm)**
BNC Male to BNC
Female right
angle adapter.



• **75-541 (50 ohm)**
• **75-691 (75 ohm)**
BNC "T" with 3
Female BNC.
• **75-690 (75 ohm)**
"T" adapter,
2 BNC Females to
1 BNC Male.



90-100
Tech Mag Mount
2 x Neodymium Magnet,
1.32" Diam.
0.32" Thick, 2 x Steel Plate,
0.0195" Thick.



• **90-613**
• **90-614 (With Red L.E.D.)**
Cigarette Lighter Plug
with 5 Amp fuse. Accepts
up to 0.17" O.D. cable.



• **90-617**
• **90-617-6**
(With 16 awg, 6 Ft. Cord)
Heavy Duty cigarette
plug with a 20 Amp fuse &
L.E.D for power indicator.




• **90-618 (2.1mm)**
• **90-619 (2.5mm)**
Cigarette Lighter Cable
with 5 Amp fuse &
L.E.D for power indicator.
20 awg, 6 Ft. Cable.




90-600
Cigarette Lighter Socket
Current rating 15A.



90-783-UL
Panel mounting fuse
holder for 3 AG
fuses. Rating
10 Amps/250 Vac.



90-767
Test Clip Set, 10 leads,
15 in. long. Miniature
insulated alligator clips &
wire. 2 pcs of 5 colors:
WH, BK, RD, GN, YL.




90-770
Heavy Duty Test Clips
30 in. long. Heavy Duty
insulated alligator clips
& wire. 1 pcs of 4 colors:
BK, RD, GN, YL.



• **90-787 (Black)**
• **90-787-W (White)**
Electrical Tape,
UL Approved



90-811
Universal Inline
Fuse Holder.
20 Awg, 25 in. wire.



• **90-833-BK-PCS (7.5 in.)**
• **90-861-BK-PCS (11 in.)**
Black cable ties. 100%
non-corrosive, Type 6/6 Nylon.
AVAILABLE IN (PCS):
25, 100 & 1000.



• **90-878 (25 pcs)**
• **90-878-100 (100 pcs)**
Black Reusable
Velcro Straps with
Calrad Logo.
6 in. (L) x 0.5 in. (W)

92 SERIES IR ACCESSORIES



92-152-NF
Single IR None
Flashing Emitter,
6 Ft. cord.



• **92-152 (Single)**
• **92-152-10 (10 Pack)**
Single IR Flashing
Emitter, 6 Ft. cord.



• **92-152-2 (Single)**
• **92-152-2-10 (10 Pack)**
Dual IR Flashing
Emitter, 6 Ft. cord.




92-163
3.5mm Stereo Jack with
3 position spring terminals
keystone insert for IR
Emitters or Stereo Audio




92-165
IR Receiver.
LCD/ PLASMA
FRIENDLY,
6 Ft. cord.



92-150-5
IR Emitter Shield Cover.
Black Opaque,
5 Per Pack.

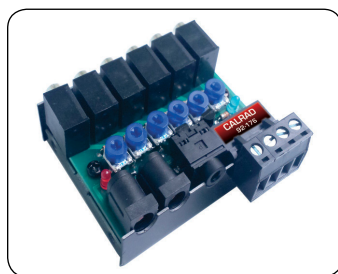


92-176
6 Port Amplified IR
Distribution Block with
Individual Signal Controls

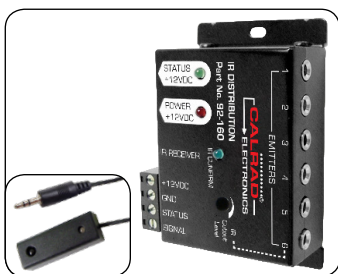

92-160 (6 Ports)
IR Kit Distribution System with IR
emitter gain control on port 6 only.
INCLUDES:
3 x IR Emitters, 1 x Distribution Block,
1 x Surface Mount Receiver,
1 x 12Vdc, 300ma Power Supply



92-180A (6 Ports)
IR Kit Distribution System
expandable up to 3 IR receivers.
INCLUDES:
1 x IR Receiver, 3 x Dual IR Emitters,
1 x 6 Port IR Distribution Block,
1 x 3.5mm Male Solderless TRS 3 screw
terminal adapter, 1 x 12Vdc Power Supply
1 x 3.5mm Female Solderless TRS 3
screw terminal adapter.

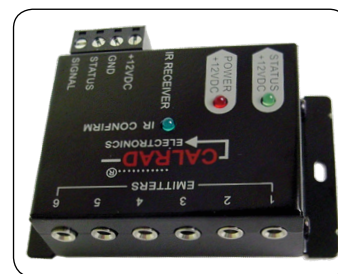

92-167
Send IR signals to 6 sources
using a single emitter or
12 more sources if double
IR emitters are used.

95 SERIES

POWER & SECURITY ACCESSORIES

SALES-TECH SUPPORT:

E-Mail: techsupport@calrad.com
Hours: Monday-Friday, 8:00am - 4:00pm (PST)

1 (800) 821-8536 **PG.21**



UP TO 250FT

95-1046-S-1

Stereo RCA Audio Balun with RS232, IR, 16 Inches Long. Over Single Cat 5e/6 Cable.



DISTANCE: 1000 FT. PLUS

95-1140

Composite Video Over Single, Cat5e Cable



DISTANCE: 300 FT. PLUS

95-1144

Component Video Over Single, Cat5e Cable



RESOLUTION DISTANCE:
480i, 480p, 720p, 1080i

95-1146

Component Video Plus Stereo Audio Over Single, Cat5e Cable



95-1050 (Sold in Pair)

HD Single Channel Passive Video Balun



95-1051 (Sold in Pair)

HD Single Channel Passive Video Balun, 6 in. Pigtail.



95-1053 (Sold in Pair)

HD Video, Power Passive Video Balun



95-702

15 Watt AC/DC Public Address Amplifier



95-2035-IR

IR Controlled 30 Watt Stereo Digital Amplifier. 15 Watts per Channel.




95-783-P

3 Prong Straight AC Plug 6 Outlet Adapter with Surge Protection



95-794

Converts 1 AC outlet to 3 outlets. 120 Vac - 15 amp rating.

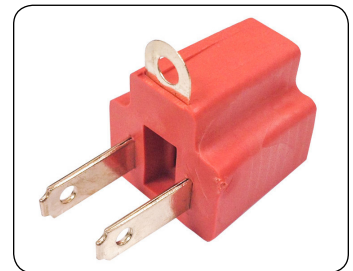


95-795

Polarized AC 3 Wire Ground Adapter, Rubber Housing



95-790

3 Prong Chassis Mount AC Receptacle



95-791

2 Prong Chassis Mount AC Receptacle



95-770-SNAP

Solder type, Snap-in Male AC Socket. 10A at 250Vac. US and CSA approved.



95-770

Solder type, Recessed Male AC Panel Jack. 10A at 250Vac. US and CSA approved.



95-771

Solder type, Recessed Female AC Panel Jack. 10A at 250Vac. US and CSA approved.



• **95-772-S (Male)**
• **95-773 (Female)**
Solder type, inline 3 conductor AC connector, 10A at 250Vac.

SALES-TECH SUPPORT
1(800)821-8536

ENGINEERED ELECTRONIC PRODUCTS

**1 X 4, 4K@60Hz
4- WAY HDMI SPLITTER**

Note!

- Advance EDID Settings
- YUV 4:4:4
- HDR



MODEL:
40-1063-HS-4

CALRAD...®
ELECTRONICS

**819 N HIGHLAND AVE
LOS ANEGELS, CA 90038**

- **TEL: (323) 465-2131**
- **FAX: (323) 465-3504**
- **www.CALRAD.com**
- **BUSINESS HOURS:**
M-F 8:00 A.M. - 4:00 P.M.

**2 WIRE HDMI TRANSMITTER
& RECEIVER PAIR WITH IR**

Note!

- 1080p
- Up to 1000 Ft.
- RS232



Signals can easily be sent over Cat3; Cat5e; Cat6; RG59; RG6; Telephone Cable;
Audio-Video Cable; Speaker Cable; Alarm Cable; Low voltage power cable.

MODEL:
40-204

MODEL:
47-116

Tilting Wall Mount, Fits 37"-70"

Note!

- Max Weight: 165 lbs
- VESA:
200 /300 /400 /600mm
- Fits 37"-70" L.E.D,
LCD or Plasma TV's

