

### Item description

- Suitable for cable clamp
- 1 x cable outlet (rear side)
- 2 x cable outlet (side)
- Removable built-in lockout caps

### Data

#### Connection data

Pole No.	12
----------	----

#### Physical data

Pin spacing	3.81 mm / 0.15 inch
Height	14.4 mm / 0.567 inch
Depth	42.7 mm / 1.681 inch

Subject to changes. Please also observe the further product documentation!

## Mechanical data

Suitable

for standard male and female connectors

## Material data

Color orange

Fire load 0.234 MJ

Weight 7.8 g

## Commercial data

Product Group 3 (Multi Conn. System)

Packaging type BOX


Country of origin DE

GTIN 4017332548335



Customs tariff number 39269097900

## Approvals / Certificates

### Country specific Approvals

Logo	Approval	Additional Approval Text	Certificate name
	<b>CB</b> DEKRA Certification B.V.	EN 61984	NL-54190
	<b>KEMA/KEUR</b> DEKRA Certification B.V.	EN 61984	71-105522

### Ship Approvals

Logo	Approval	Additional Approval Text	Certificate name
	<b>DNV GL</b> Det Norske Veritas, Germanischer Lloyd	-	TAE000016Z
	<b>LR</b> Lloyds Register	IEC 61984	96/20035 (E5)

Subject to changes. Please also observe the further product documentation!

## Downloads

### Documentation

#### Additional Information

Technical explanations	2019 Apr 3	pdf 2.0 MB	Download
------------------------	------------	---------------	----------


## Environmental Product Compliance

### Compliance Search

Environmental Product Compliance 734-642 Strain relief housing; orange	URL	Download
---	-----	----------

## Installation Notes


### Application

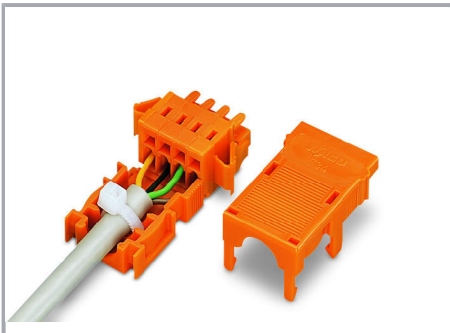

4-pole, 1-conductor female connector, with locking levers and strain relief housing (2- to 5-pole strain relief housing suitable only for cable ties)

### Application

Subject to changes. Please also observe the further product documentation!

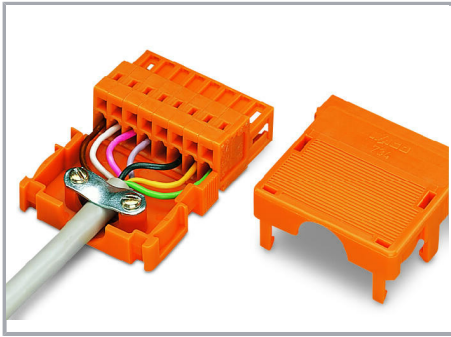

Strain relief housing for 734 Series Male and Female Connectors with CAGE CLAMP® connection

Subject to changes. Please also observe the further product documentation!