


Panel Connector, Male Thread, Rear Mounting




Type	Part Number
4 holes \varnothing 3,2 mm (.13")	7.450.000.000 ^{*)}
4 threads M3	7.452.000.000 ^{*)}
4 holes \varnothing 2,7 mm (.11")	7.454.000.000 ^{*)}
4 threads M2,5	7.456.000.000 ^{*)}

Optional: Flat gasket

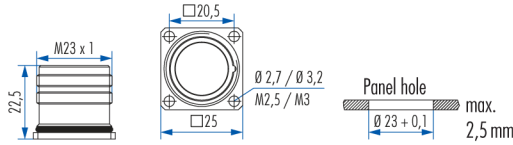

Panel Connector, Male Thread, Rear Mounting

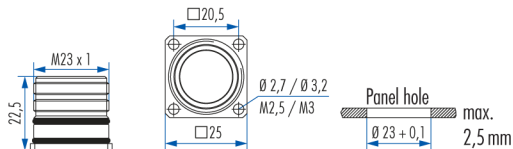


Type	Part Number
With anti-vibration O-Ring	
4 holes \varnothing 3,2 mm (.13")	7.460.000.000
4 threads M3	7.462.000.000
4 holes \varnothing 2,7 mm (.11")	7.464.000.000
4 threads M2,5	7.466.000.000

Optional: Flat gasket



Panel Connector, Male Thread, Single Hole Mounted




Type	Part Number
Rear mounting	
Thread M25 x 1,5	7.458.000.000 ^{*)}

Including jam nut M25 x 1,5



Panel Connector, Female Thread, Rear Mounting

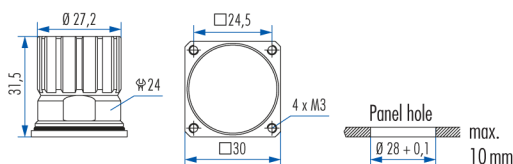

Type	Part Number
With knurled nut, rear mounting	
4 threads M3	7.459.000.000



Housing without inserts and contacts

^{*)} No compatibility with TWILOCK

M 16

M 23 PoE

M 23 RJ 45

M 23 Signal

M 27 Signal

M 23 Power

M 40 Power

INOX

Moulded Cordsets

Customized