
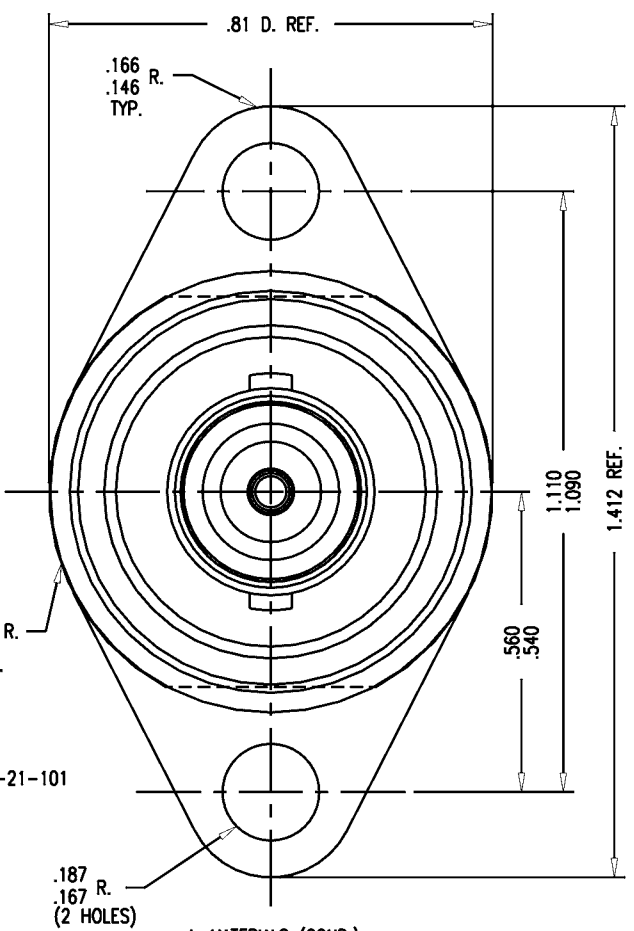



GSD

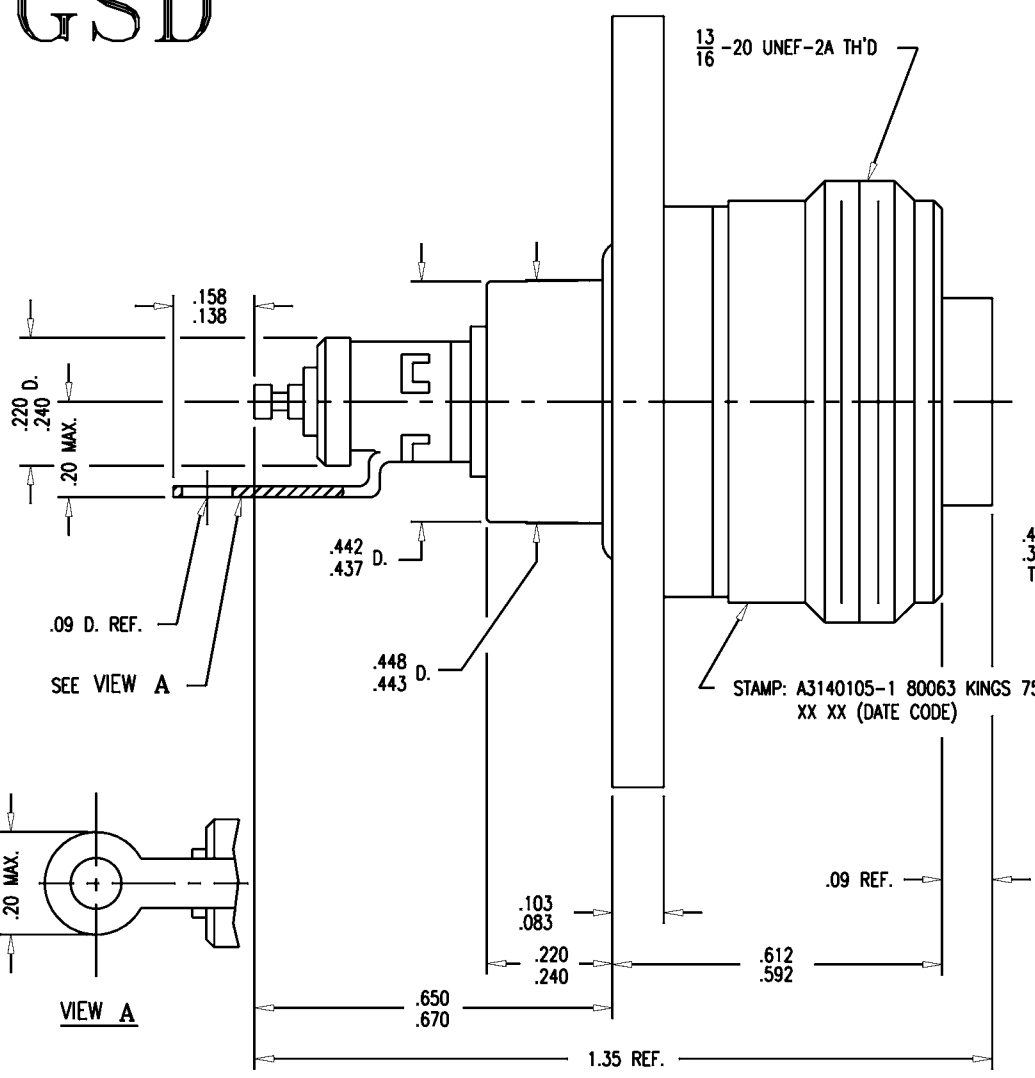

- MATERIALS (COND.)
 COIL SPRING: STAINLESS STEEL, 316 FM
 PLASTIC CAP: VINYL, COLOR: RED
 SOLDER LUG
 CONTACT F
 FLANGE
 RETAINING RING
 ALL OTHER METAL PARTS: BRASS, QQ-B-626
- FINISHES:
 RETAINING RING } CADMIUM PATE, QQ-P-416
 BODY }
 COIL SPRING: PASSIVATION TREATMENT, QQ-P-35
 ALL OTHER METAL PARTS: SILVER PLATE, QQ-S-365
- ELECTRICAL CHARACTERISTICS:
 NOMINAL IMPEDANCE: 50 OHMS
 WORKING VOLTAGE: 500 VRMS
 FREQUENCY RANGE: DC TO 4 GHz.

- NOTES:
- CONNECTOR MUST BE CAPABLE OF WITHSTANDING A 30 PSI PRESSURE TEST, IN BOTH MATED & UNMATED POSITIONS OF INTERNAL PARTS.
 - CONTINUITY BETWEEN CONTACT AND SOLDER LUG MUST BE BROKEN WHEN A 1.5 LB. \pm .5 LB. FORCE IS APPLIED TO THE FRONT OF INSULATOR. WHEN FORCE IS REMOVED CONTINUITY MUST RESUME INSTANTANEOUSLY.
 - MATES WITH K-3949 & K-3993.
 - MATERIALS:
 INSULATORS: TEFLON, ASTM-D-1457
 O-RINGS: SYNTHETIC RUBBER, PER MIL-P-25732

757-21-101

REVISIONS

ISSUE	CHANGES
4	CN 32467 A REDRAWN JCA 08/24/90

GSD

SCALE	4:1
APPROX SURFACE AREA	
WAS:	E-15603E
USED ON	
REF:	ARMY DWG. A3140105 REV. A
BNC BULKHEAD RECEPTACLE	
DRAWN	JCA
DATE	08/24/90
DESIGN	JT
DATE	08/27/90
APPR.	
DATE	

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

757-21-101