

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [075757401](#)
Status: **Active**
Overview: [MX150™ Unshrouded Header](#)
Description: MX150 Dual Row Header, Vertical, 20 Circuits, 1.5µm Tin (Sn) Plating, 16.09mm Mating Pin Length, 3.05mm PC Tail Length

Documents:

[3D Model](#) [Packaging Specification PK-75757-006 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Product Specification PS-75757-000-001 \(PDF\)](#)

General


Product Family	PCB Headers
Series	75757
Application	Power, Wire-to-Board
CURRENT-MAX-NUMERIC	17.0
Overview	MX150™ Unshrouded Header
PITCH-MATING-NUMERIC	3.50
Product Name	MX150
UPC	800756810805

Physical

Breakaway	No
Circuits (Loaded)	20
Circuits (maximum)	20
Color - Resin	Black
Durability (mating cycles max)	25
First Mate / Last Break	No
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	None
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	5.173/g
Number of Rows	2
Orientation	Vertical
PC Tail Length	3.05mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.57mm
Packaging Type	Tube
Pitch - Mating Interface	3.50mm
Pitch - Termination Interface	3.50mm
Plating min - Mating	1.270µm
Polarized to Mating Part	No
Polarized to PCB	No
Shrouded	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-40° to +125°C
Termination Interface: Style	Through Hole

Electrical

Current - Maximum per Contact	17.0A
Voltage - Maximum	500V DC

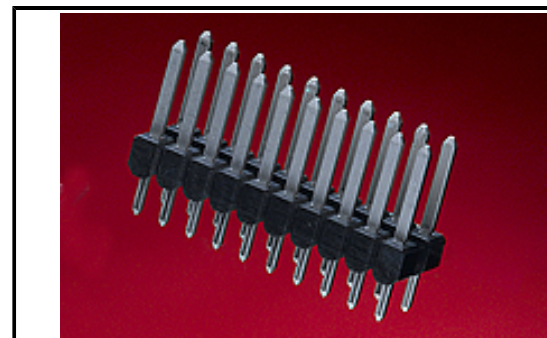

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Not Reviewed

REACH SVHC

Not Contained Per
-ED/01/2018 (15
January 2018)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

[75757](#) Series

Mates With

[33472](#) Dual Row MX150 Receptacles

Solder Process Data

Duration at Max. Process Temperature (seconds)	005
Lead-free Process Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	245

Material Info**Reference - Drawing Numbers**

Packaging Specification	PK-75757-006
Product Specification	PS-75757-000-001
Sales Drawing	SD-75757-002-001, SD-75757-003-001, SD-75757-010-001

This document was generated on 06/05/2019

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION