4mm Banana Tip Probe Body to Right-Angle 4mm male Banana Plug Lead





Applications

RoHS Compliant

To get safe probes or pincer clips from a DMM (Digital MultiMeter) with 4mm banana sockets on the front face.

Characteristics

Electrical Safety

: According to EN / IEC 61010-031:2008. 1000 V CAT II if the cap is removed / 1000 V CAT II / 1000 V CAT III / 600 V CAT IV if the cap is set up, reinforced insulation, up to 36A (at +40°C) depending on the wire.

These specifications come from the creepage distances, clearances, accessible parts, and solid insulation of the lead. And the considered specifications of the environment are: Pollution degree, 1 or 2; Relative humidity, 80% maximum for temperatures up to 31° C decreasing linearly to 50% relative humidity at $+40^{\circ}$ C

Temperature range, +5°C to +40°C, Indoor use; Altitude, 2000 m maximum.

Barriers. Keep behind these barriers to operate safely the lead while connecting to hazardous live voltages (more than 33V AC and 70V DC).




Operating Temperature

: -20°C to +80°C

Materials

: Conductors: Nickel-coated brass and red annealed copper. Wire jackets: silicone. Insulators and lantern contact spring

Colour : Red and Black
Overall Length : 1 meter (100cm)

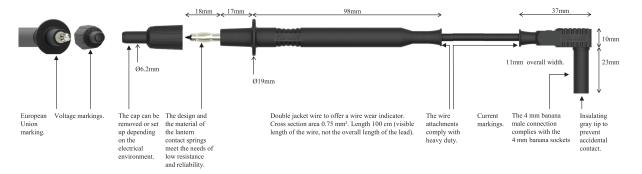

Part Number Table

| Description | Length | Colour | Part Number |
|---|--------|--------|-------------|
| 4mm Banana Tip Probe Body to Right-Angle 4mm male Banana Plug Lead | 1m | Red | 76-046 |
| | | Black | 76-047 |

Important Notice: This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Temma is the registered trademark of the Group. © Premier Farnell Limited 2016.

www.element14.com www.farnell.com www.newark.com www.cpc.co.uk www.mcmelectronics.com



28/03/17 V1.0