


SD

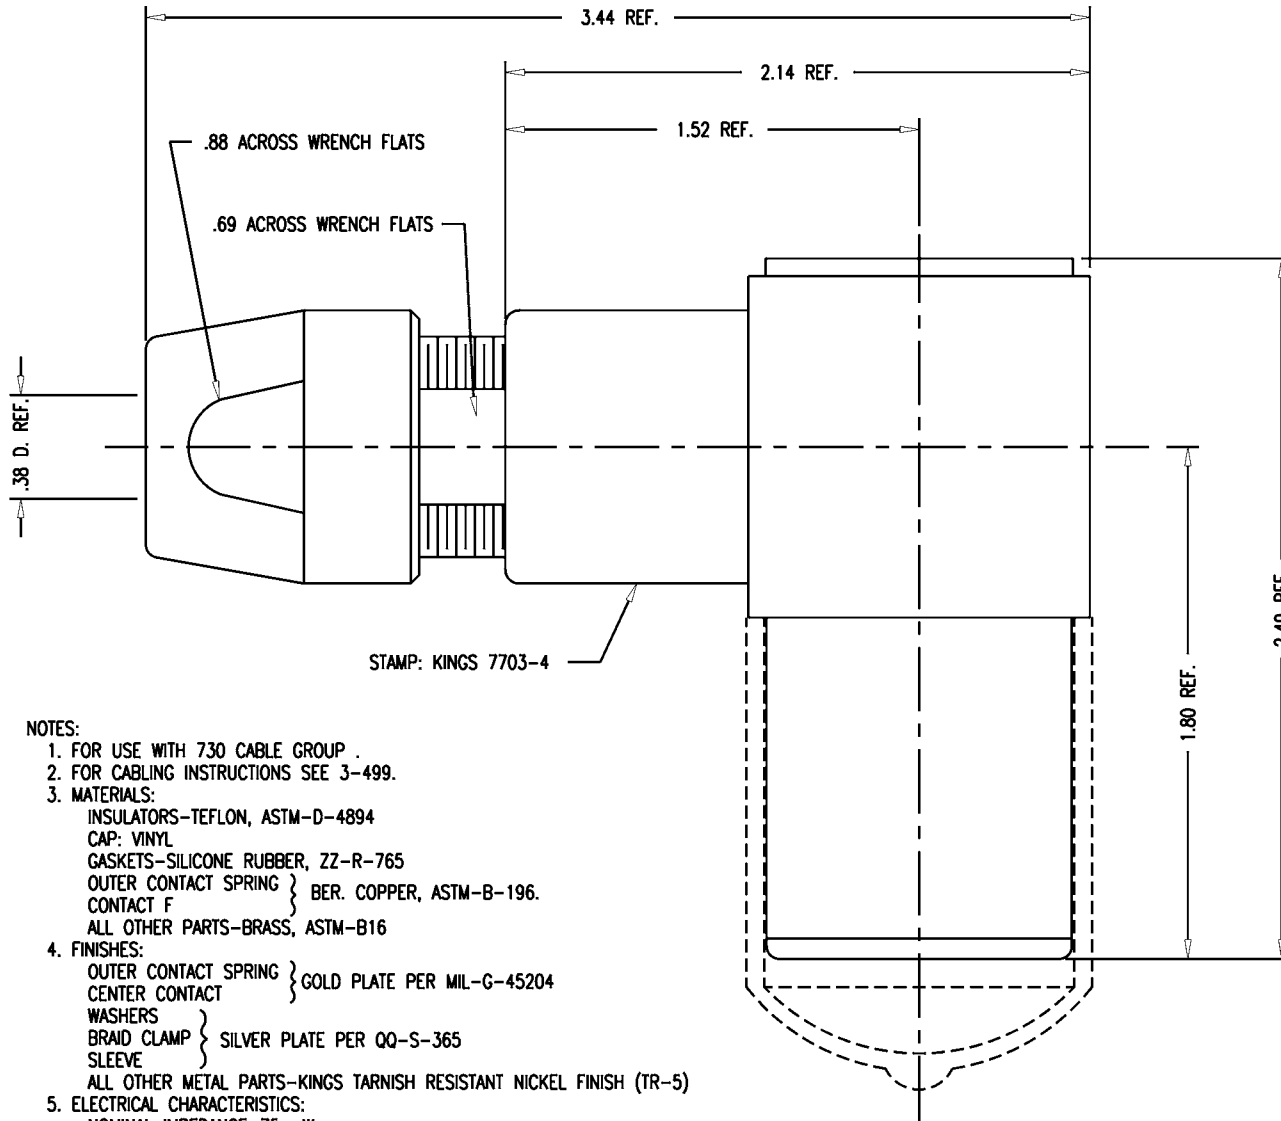

NOTES:

- FOR USE WITH 730 CABLE GROUP .
- FOR CABLING INSTRUCTIONS SEE 3-499.
- MATERIALS:
 - INSULATORS-TEFLON, ASTM-D-4894
 - CAP: VINYL
 - GASKETS-SILICONE RUBBER, ZZ-R-765
 - OUTER CONTACT SPRING } BER. COPPER, ASTM-B-196.
 - CONTACT F }
 - ALL OTHER PARTS-BRASS, ASTM-B16
- FINISHES:
 - OUTER CONTACT SPRING } GOLD PLATE PER MIL-G-45204
 - CENTER CONTACT }
 - WASHERS }
 - BRAID CLAMP } SILVER PLATE PER QQ-S-365
 - SLEEVE }
 - ALL OTHER METAL PARTS-KINGS TARNISH RESISTANT NICKEL FINISH (TR-5)
- ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE-75 ~W
 - FREQUENCY RANGE-DC TO 500 MHz
 - VOLTAGE BREAKDOWN:
 - CENTER CONDUCTOR/INNER GROUND: 1500 VOLTS RMS
 - INNER GROUND/OUTER GROUND: 500 VOLTS RMS

7703-4

REVISIONS

ISSUE	CHANGES
0	ER 35448 ME 04/17/95
1	CN 37377 D JW 08/06/97
2	CN 38864 E JPK 06/03/03

7703-4SD

SCALE 2:1

APPROX SURFACE AREA

USED ON

REF: KP-8023-730-400

JACK, ANGLE, TRI-LOC
SERIAL DIGITAL

DRAWN	ME	DATE	04/17/95
DESIGN	DW	DATE	04/20/95
APPR.	FD	DATE	05/12/95

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

7703-4

SD