

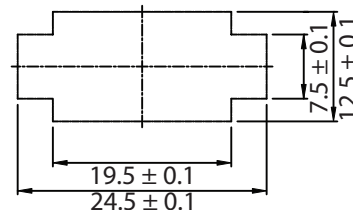
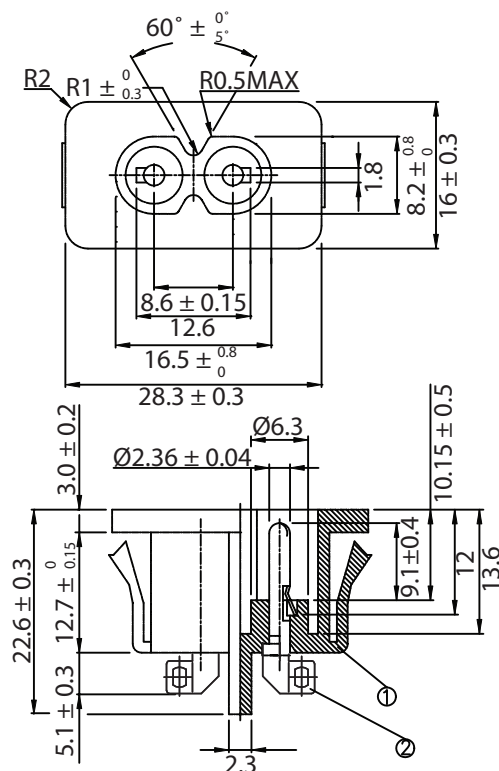
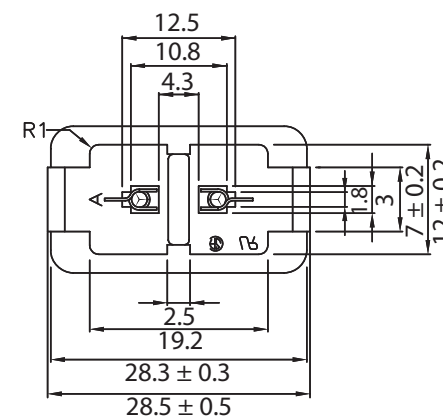


THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
A	Panel Thickness 0.8~1.1	01-28-03	BZ
B	Panel Thickness 0.6~2.0	07-15-03	LG
C	Panel Thickness 0.6~1.5	10-30-03	LG
D	RoHS Compliancy	06-01-06	DP
E	Dimensions Update	09-14-07	DP

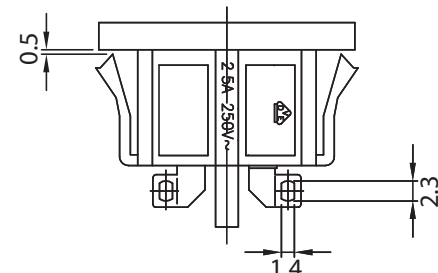

PANEL CUTOUT

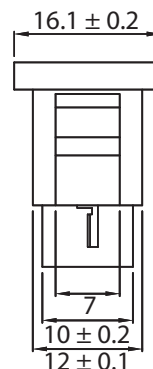

NOTES:

MATERIAL:

HOUSING: THERMOPLASTIC
 TERMINAL: COPPER ALLOY
 RATING: 2.5A 250V AC
 INSULATION RESISTANCE: OVER 100 OHM, 500V DC
 DIELECTRIC STRENGTH: 2000V AC ONE MINUTE
 APPROVALS: UL, CSA, VDE
 PANEL THICKNESS: 0.6~1.5
 RoHS COMPLIANT

CONTROLLED

2	Contact PIN Bronze Strip t=0.3mm Tin-Plated	2
1	Body Insulator PC	1
Dim range (mm) Tolerance +/- (mm) Qualtek Electronics Corp. PPC DIVISION Part Number: 771W-X2/01 RoHS Compliant Description: AC RECEPTACLE		
0-1	0.15	UNIT: mm REV. E
1-6	0.20	
6-18	0.30	
18-50	0.50	
50-120	0.70	
120-250	0.90	Drawn / Date B.Zhang 03-10-04
250-500	1.20	
		Checked / Date 03-10-04 Approved / Date JJH / 03-10-04