
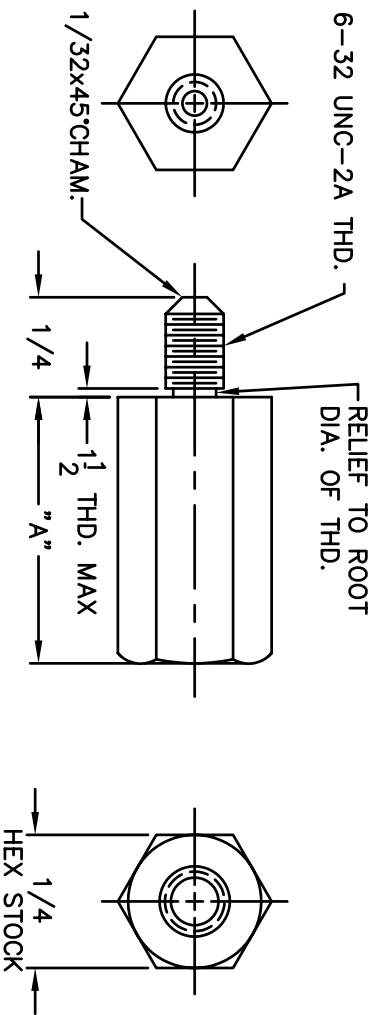


REVISIONS		REVISED DATE	APPR
SYM	DESCRIPTION		

FULL SECTION

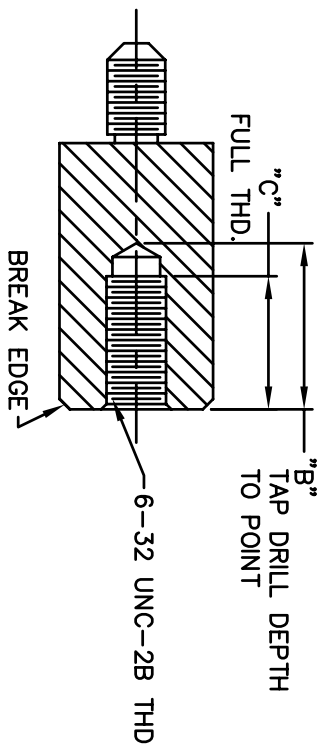

PART NO.	STANDOFF		
	LENGTH "A" ±.005	DRILL DEPTH "B"	TAP DEPTH "C" DIM NO. THDS
8001C	.250	.211	.104 3-4
8001E	.375	.336	.229 7-8
8001G	.500	.482	.350 10-11
8001J	.625	.482	.350 10-11
8001L	.750	.482	.350 10-11
8001N	.875	.482	.350 10-11
8001Q	1.000	.482	.350 10-11
8001R	1.125	.482	.350 10-11
8001S	1.250	.482	.350 10-11
8001T	1.375	.482	.350 10-11
8001U	1.500	.482	.350 10-11
8001V	1.625	.482	.350 10-11
8001W	1.750	.482	.350 10-11
8001Y	2.000	.482	.350 10-11
8001ZB	2.500	.482	.350 10-11
8001ZD	3.000	.482	.350 10-11

MATERIAL: ALUMINUM ALLOY 2011 T-3		FINISH: IRRIDITE 14-2 PER MIL-C-5541	
DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED		TITLE: 8001C-8001ZD	
XX	XXX	XXX	ALUMINUM HEX MALE/FEMALE STANDOFF
FRACTIONS ANGLES SCALE		DRAWN: T. LORD DATE: 12/6/03	
---	---	4X	CHECKED: T. LORD DATE: 12/6/03
HEAT TREAT: ---		APPROVED: T. LORD DATE: 12/6/03	
PLOT SCALE: 1=1		SIZE: B	DRAWING NUMBER: SD 8001C-8001ZD
		ISSUE: E	

ABBATRON
 Electronic Connectors and Hardware
 632 Arch Street, Meadville, Pa. 16335