



Description	Designation	Pack. Unit
Interface Module, 9-pos D-Sub Male, Right-Angle, Multi-Mount Kit	8002-0100/0000-0264	1

Features	Technical Data																		
<ul style="list-style-type: none"> This module is designed to interface directly with a fixed panel-mounted 9-position D-Sub, or with a cable, when DIN rail mounting is selected. A multi-mount hardware kit is provided, including captive #4-40 screws, #4-40 jackscrews, and snap-in 35mm DIN rail feet that can also be trimmed & used to provide a stable, non-marring wiring platform, for free-hanging applications. RoHS compliant. Push-button WAGO CAGE CLAMP® S terminals. For signal-level wiring, up to 30V. Open-back, compact, low-profile construction. Great for Din rail applications with limited enclosure depth. 	<table border="1"> <tr> <td>Operating voltage</td> <td>30V AC/DC</td> </tr> <tr> <td>Nominal current</td> <td>2 Amps</td> </tr> <tr> <td>Connector contact</td> <td>Au flash</td> </tr> <tr> <td>Output wire connections</td> <td>Cage Clamp S 0.2 – 1.5mm² / AWG 24 – 16</td> </tr> <tr> <td>Stripped wire length</td> <td>8.5-9.5mm / 0.32-0.36"</td> </tr> <tr> <td>Dimensions (mm) W x H x L (height from upper-edge of DIN rail)</td> <td>33 x 20 x 52</td> </tr> <tr> <td>Minimum temperature</td> <td>-35°C (without impact)</td> </tr> <tr> <td>Operating temperature</td> <td>-20°C to 50°C</td> </tr> <tr> <td>Maximum Humidity</td> <td>95%</td> </tr> </table>	Operating voltage	30V AC/DC	Nominal current	2 Amps	Connector contact	Au flash	Output wire connections	Cage Clamp S 0.2 – 1.5mm ² / AWG 24 – 16	Stripped wire length	8.5-9.5mm / 0.32-0.36"	Dimensions (mm) W x H x L (height from upper-edge of DIN rail)	33 x 20 x 52	Minimum temperature	-35°C (without impact)	Operating temperature	-20°C to 50°C	Maximum Humidity	95%
Operating voltage	30V AC/DC																		
Nominal current	2 Amps																		
Connector contact	Au flash																		
Output wire connections	Cage Clamp S 0.2 – 1.5mm ² / AWG 24 – 16																		
Stripped wire length	8.5-9.5mm / 0.32-0.36"																		
Dimensions (mm) W x H x L (height from upper-edge of DIN rail)	33 x 20 x 52																		
Minimum temperature	-35°C (without impact)																		
Operating temperature	-20°C to 50°C																		
Maximum Humidity	95%																		

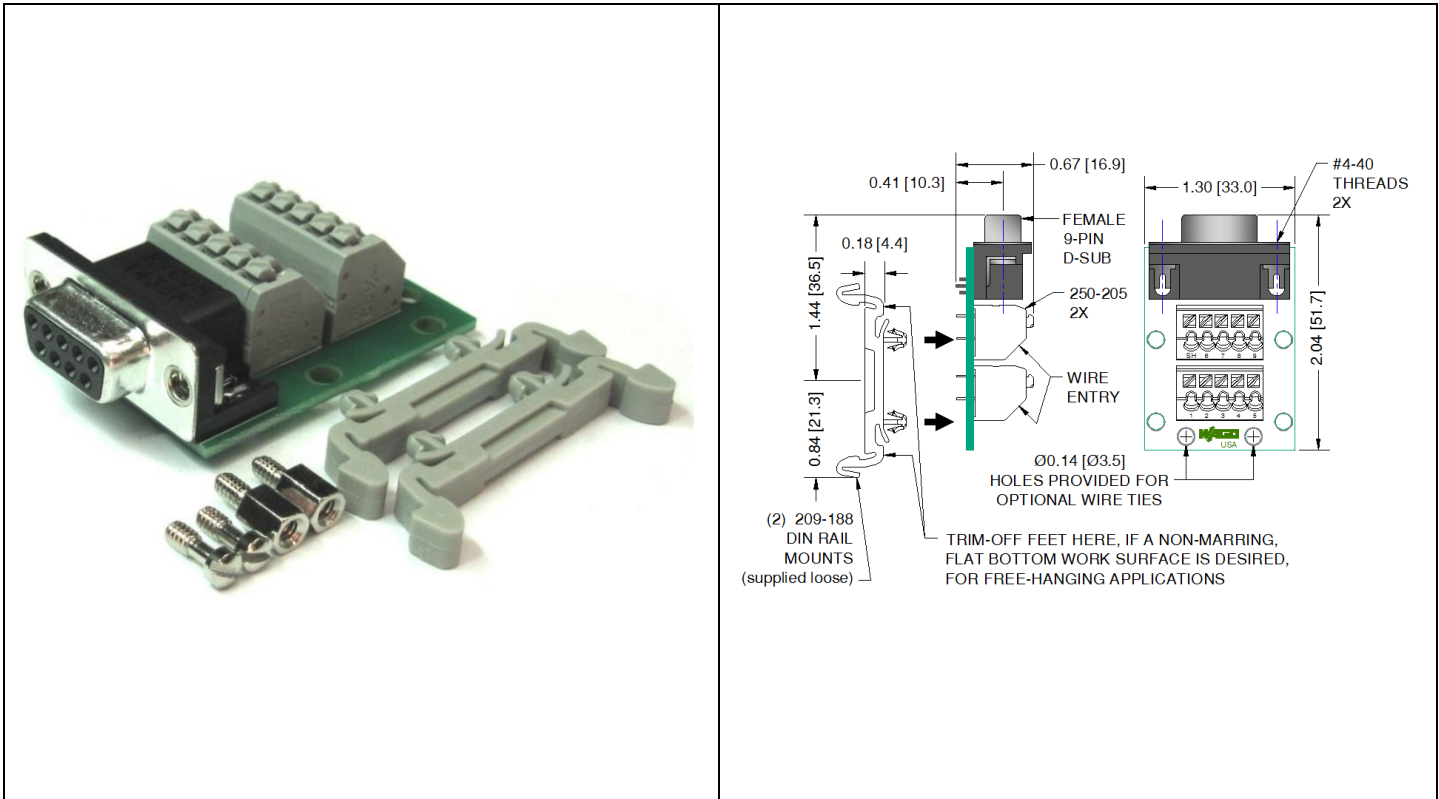

Description	Designation	Pack. Unit																		
Interface Module, 9-pos D-Sub Female, Right-Angle, Multi-Mount Kit	8002-0100/0000-0265	1																		
<p>Features</p> <ul style="list-style-type: none"> This module is designed to interface directly with a fixed panel-mounted 9-position D-Sub, or with a cable, when DIN rail mounting is selected. A multi-mount hardware kit is provided, including captive #4-40 screws, #4-40 jackscrews, and snap-in 35mm DIN rail feet that can also be trimmed & used to provide a stable, non-marring wiring platform, for free-hanging applications. RoHS compliant. Push-button WAGO CAGE CLAMP® S terminals. For signal-level wiring, up to 30V. Open-back, compact, low-profile construction. Great for Din rail applications with limited enclosure depth. 	<p>Technical Data</p> <table border="1"> <tr> <td>Operating voltage</td> <td>30V AC/DC</td> </tr> <tr> <td>Nominal current</td> <td>2 Amps</td> </tr> <tr> <td>Connector contact</td> <td>Au flash</td> </tr> <tr> <td>Output wire connections</td> <td>Cage Clamp S 0.2 – 1.5mm² / AWG 24 – 16</td> </tr> <tr> <td>Stripped wire length</td> <td>8.5-9.5mm / 0.32-0.36"</td> </tr> <tr> <td>Dimensions (mm) W x H x L (height from upper-edge of DIN rail)</td> <td>33 x 19.2 x 51.7</td> </tr> <tr> <td>Minimum temperature</td> <td>-35°C (without impact)</td> </tr> <tr> <td>Operating temperature</td> <td>-20°C to 50°C</td> </tr> <tr> <td>Maximum Humidity</td> <td>95%</td> </tr> </table>	Operating voltage	30V AC/DC	Nominal current	2 Amps	Connector contact	Au flash	Output wire connections	Cage Clamp S 0.2 – 1.5mm ² / AWG 24 – 16	Stripped wire length	8.5-9.5mm / 0.32-0.36"	Dimensions (mm) W x H x L (height from upper-edge of DIN rail)	33 x 19.2 x 51.7	Minimum temperature	-35°C (without impact)	Operating temperature	-20°C to 50°C	Maximum Humidity	95%	
Operating voltage	30V AC/DC																			
Nominal current	2 Amps																			
Connector contact	Au flash																			
Output wire connections	Cage Clamp S 0.2 – 1.5mm ² / AWG 24 – 16																			
Stripped wire length	8.5-9.5mm / 0.32-0.36"																			
Dimensions (mm) W x H x L (height from upper-edge of DIN rail)	33 x 19.2 x 51.7																			
Minimum temperature	-35°C (without impact)																			
Operating temperature	-20°C to 50°C																			
Maximum Humidity	95%																			

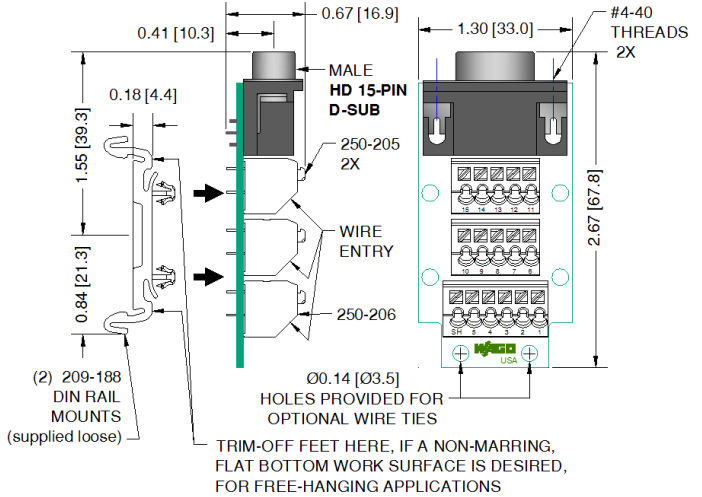



Description	Designation	Pack. Unit
Interface Module, HD 15-pos D-Sub Male, Right-Angle, Multi-Mount Kit	8002-0100/0000-0471	1

Features


- This module is designed to interface directly with a fixed panel-mounted high density 15-position D-Sub, or with a cable, when DIN rail mounting is selected.
- A multi-mount hardware kit is provided, including captive #4-40 screws, #4-40 jackscrews, and snap-in 35mm DIN rail feet that can also be trimmed & used to provide a stable, non-marring wiring platform, for free-hanging applications.
- RoHS compliant.
- Push-button **WAGO CAGE CLAMP® S** terminals.
- For signal-level wiring, up to 30V.
- Open-back, compact, low-profile construction.
- Great for Din rail applications with limited enclosure depth.

Technical Data



Operating voltage	30V AC/DC
Nominal current	1.5 Amps
Connector contact	Au flash
Output wire connections	Cage Clamp S 0.2 – 1.5mm ² / AWG 24 – 16
Stripped wire length	8.5-9.5mm / 0.32-0.36"
Dimensions (mm) W x H x L (height from upper-edge of DIN rail)	33 x 20 x 68
Minimum temperature	-35°C (without impact)
Operating temperature	-20°C to 50°C
Maximum Humidity	95%

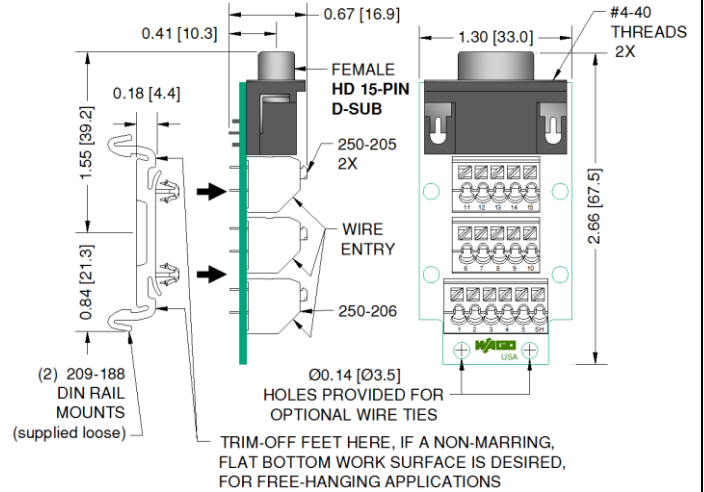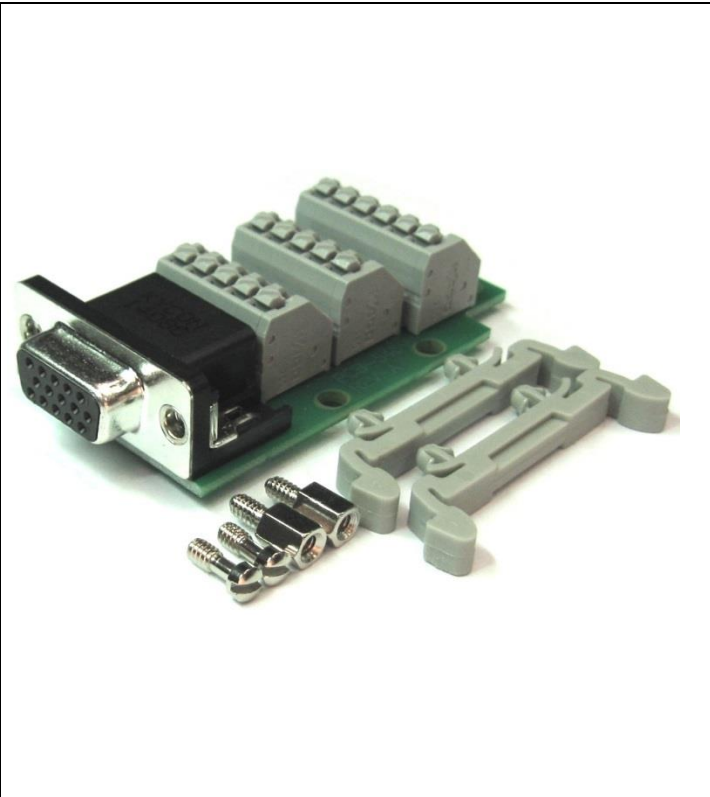


Description	Designation	Pack. Unit																		
Interface Module, HD 15-pos D-Sub Female, Right-Angle, Multi-Mount Kit	8002-0100/0000-0472	1																		
<p>Features</p> <ul style="list-style-type: none"> This module is designed to interface directly with a fixed panel-mounted high density 15-position D-Sub, or with a cable, when DIN rail mounting is selected. A multi-mount hardware kit is provided, including captive #4-40 screws, #4-40 jackscrews, and snap-in 35mm DIN rail feet that can also be trimmed & used to provide a stable, non-marring wiring platform, for free-hanging applications. RoHS compliant. Push-button WAGO CAGE CLAMP® S terminals. For signal-level wiring, up to 30V. Open-back, compact, low-profile construction. Great for Din rail applications with limited enclosure depth. 	<p>Technical Data</p> <table border="1"> <tr> <td>Operating voltage</td> <td>30V AC/DC</td> </tr> <tr> <td>Nominal current</td> <td>1.5 Amps</td> </tr> <tr> <td>Connector contact</td> <td>Au flash</td> </tr> <tr> <td>Output wire connections</td> <td>Cage Clamp S 0.2 – 1.5mm² / AWG 24 – 16</td> </tr> <tr> <td>Stripped wire length</td> <td>8.5-9.5mm / 0.32-0.36"</td> </tr> <tr> <td>Dimensions (mm) W x H x L (height from upper-edge of DIN rail)</td> <td>33 x 20 x 68</td> </tr> <tr> <td>Minimum temperature</td> <td>-35°C (without impact)</td> </tr> <tr> <td>Operating temperature</td> <td>-20°C to 50°C</td> </tr> <tr> <td>Maximum Humidity</td> <td>95%</td> </tr> </table>	Operating voltage	30V AC/DC	Nominal current	1.5 Amps	Connector contact	Au flash	Output wire connections	Cage Clamp S 0.2 – 1.5mm ² / AWG 24 – 16	Stripped wire length	8.5-9.5mm / 0.32-0.36"	Dimensions (mm) W x H x L (height from upper-edge of DIN rail)	33 x 20 x 68	Minimum temperature	-35°C (without impact)	Operating temperature	-20°C to 50°C	Maximum Humidity	95%	
Operating voltage	30V AC/DC																			
Nominal current	1.5 Amps																			
Connector contact	Au flash																			
Output wire connections	Cage Clamp S 0.2 – 1.5mm ² / AWG 24 – 16																			
Stripped wire length	8.5-9.5mm / 0.32-0.36"																			
Dimensions (mm) W x H x L (height from upper-edge of DIN rail)	33 x 20 x 68																			
Minimum temperature	-35°C (without impact)																			
Operating temperature	-20°C to 50°C																			
Maximum Humidity	95%																			

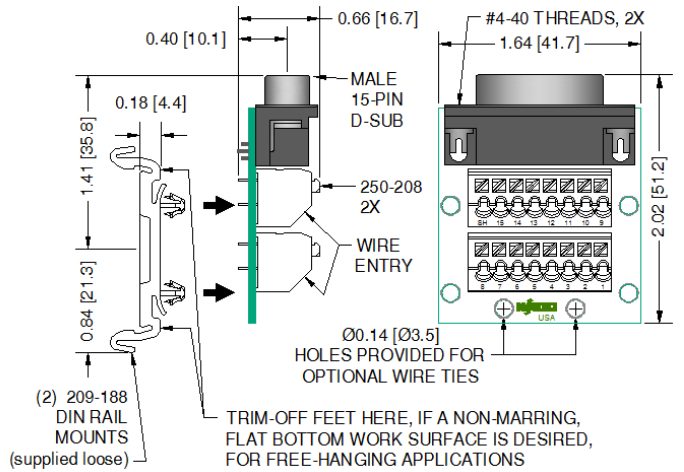

Description	Designation	Pack. Unit																		
Interface Module, 15-pos D-Sub Male, Right-Angle, Multi-Mount Kit	8002-0100/0000-0477	1																		
<p>Features</p> <ul style="list-style-type: none"> This module is designed to interface directly with a fixed panel-mounted 15-position D-Sub, or with a cable, when DIN rail mounting is selected. A multi-mount hardware kit is provided, including captive #4-40 screws, #4-40 jackscrews, and snap-in 35mm DIN rail feet that can also be trimmed & used to provide a stable, non-marring wiring platform, for free-hanging applications. RoHS compliant. Push-button WAGO CAGE CLAMP® S terminals. For signal-level wiring, up to 30V. Open-back, compact, low-profile construction. Great for Din rail applications with limited enclosure depth. 	<p>Technical Data</p> <table border="1"> <tr> <td>Operating voltage</td> <td>30V AC/DC</td> </tr> <tr> <td>Nominal current</td> <td>1.5 Amps</td> </tr> <tr> <td>Connector contact</td> <td>Au flash</td> </tr> <tr> <td>Output wire connections</td> <td>Cage Clamp S 0.2 – 1.5mm² / AWG 24 – 16</td> </tr> <tr> <td>Stripped wire length</td> <td>8.5-9.5mm / 0.32-0.36"</td> </tr> <tr> <td>Dimensions (mm) W x H x L (height from upper-edge of DIN rail)</td> <td>42 x 20 x 52</td> </tr> <tr> <td>Minimum temperature</td> <td>-35°C (without impact)</td> </tr> <tr> <td>Operating temperature</td> <td>-20°C to 50°C</td> </tr> <tr> <td>Maximum Humidity</td> <td>95%</td> </tr> </table>	Operating voltage	30V AC/DC	Nominal current	1.5 Amps	Connector contact	Au flash	Output wire connections	Cage Clamp S 0.2 – 1.5mm ² / AWG 24 – 16	Stripped wire length	8.5-9.5mm / 0.32-0.36"	Dimensions (mm) W x H x L (height from upper-edge of DIN rail)	42 x 20 x 52	Minimum temperature	-35°C (without impact)	Operating temperature	-20°C to 50°C	Maximum Humidity	95%	
Operating voltage	30V AC/DC																			
Nominal current	1.5 Amps																			
Connector contact	Au flash																			
Output wire connections	Cage Clamp S 0.2 – 1.5mm ² / AWG 24 – 16																			
Stripped wire length	8.5-9.5mm / 0.32-0.36"																			
Dimensions (mm) W x H x L (height from upper-edge of DIN rail)	42 x 20 x 52																			
Minimum temperature	-35°C (without impact)																			
Operating temperature	-20°C to 50°C																			
Maximum Humidity	95%																			

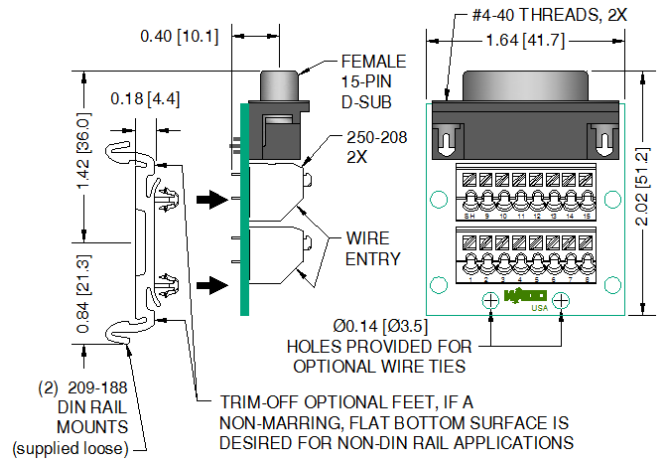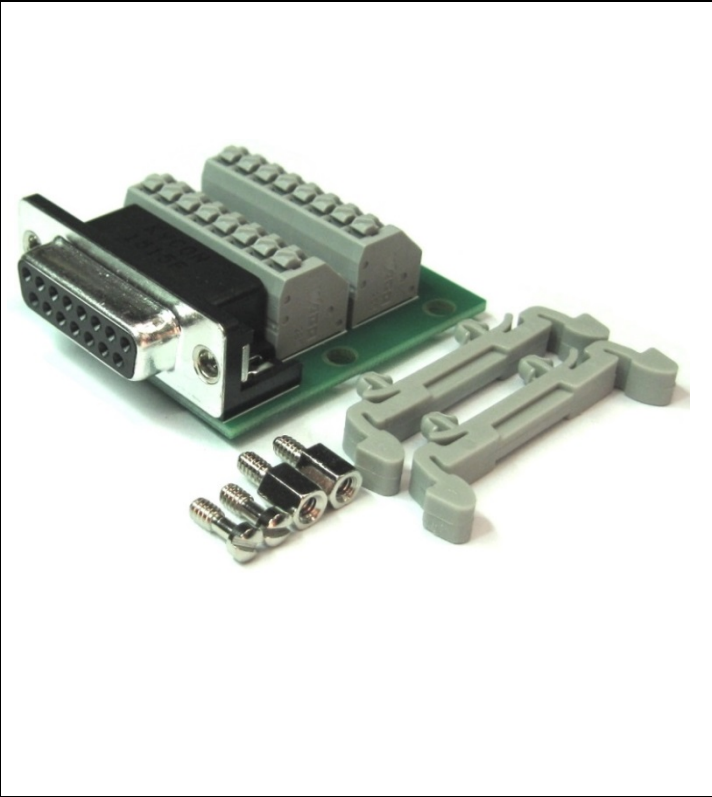

Description	Designation	Pack. Unit																		
Interface Module, 15-pos D-Sub Female, Right-Angle, Multi-Mount Kit	8002-0100/0000-0478	1																		
<p>Features</p> <ul style="list-style-type: none"> This module is designed to interface directly with a fixed panel-mounted 15-position D-Sub, or with a cable, when DIN rail mounting is selected. A multi-mount hardware kit is provided, including captive #4-40 screws, #4-40 jackscrews, and snap-in 35mm DIN rail feet that can also be trimmed & used to provide a stable, non-marring wiring platform, for free-hanging applications. RoHS compliant. Push-button WAGO CAGE CLAMP® S terminals. For signal-level wiring, up to 30V. Open-back, compact, low-profile construction. Great for Din rail applications with limited enclosure depth. 	<p>Technical Data</p> <table border="1"> <tr> <td>Operating voltage</td> <td>30V AC/DC</td> </tr> <tr> <td>Nominal current</td> <td>2 Amps</td> </tr> <tr> <td>Connector contact</td> <td>Au flash</td> </tr> <tr> <td>Output wire connections</td> <td>Cage Clamp S 0.2 – 1.5mm² / AWG 24 – 16</td> </tr> <tr> <td>Stripped wire length</td> <td>8.5-9.5mm / 0.32-0.36"</td> </tr> <tr> <td>Dimensions (mm) W x H x L (height from upper-edge of DIN rail)</td> <td>42 x 20 x 52</td> </tr> <tr> <td>Minimum temperature</td> <td>-35°C (without impact)</td> </tr> <tr> <td>Operating temperature</td> <td>-20°C to 50°C</td> </tr> <tr> <td>Maximum Humidity</td> <td>95%</td> </tr> </table>	Operating voltage	30V AC/DC	Nominal current	2 Amps	Connector contact	Au flash	Output wire connections	Cage Clamp S 0.2 – 1.5mm ² / AWG 24 – 16	Stripped wire length	8.5-9.5mm / 0.32-0.36"	Dimensions (mm) W x H x L (height from upper-edge of DIN rail)	42 x 20 x 52	Minimum temperature	-35°C (without impact)	Operating temperature	-20°C to 50°C	Maximum Humidity	95%	
Operating voltage	30V AC/DC																			
Nominal current	2 Amps																			
Connector contact	Au flash																			
Output wire connections	Cage Clamp S 0.2 – 1.5mm ² / AWG 24 – 16																			
Stripped wire length	8.5-9.5mm / 0.32-0.36"																			
Dimensions (mm) W x H x L (height from upper-edge of DIN rail)	42 x 20 x 52																			
Minimum temperature	-35°C (without impact)																			
Operating temperature	-20°C to 50°C																			
Maximum Humidity	95%																			

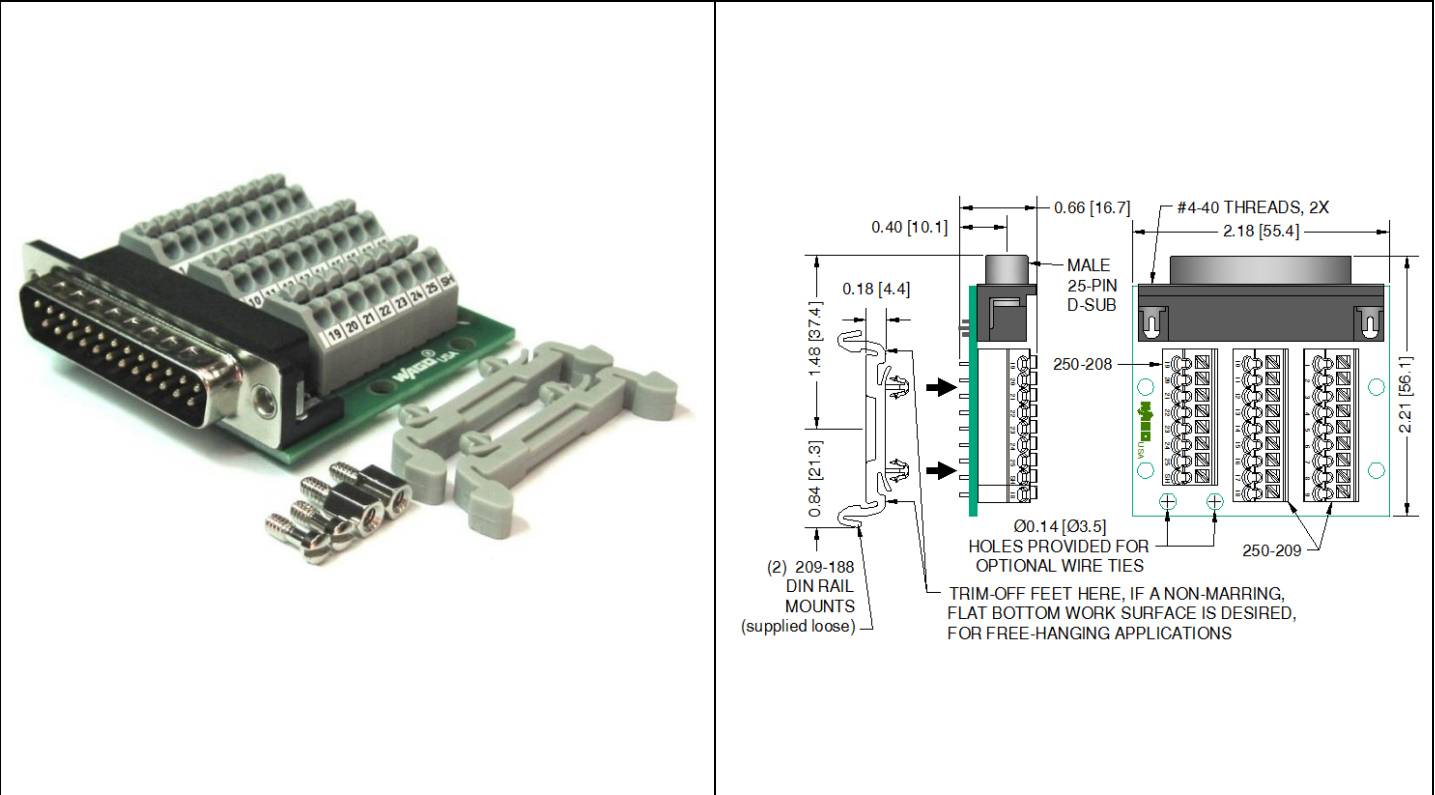


Description	Designation	Pack. Unit
Interface Module, 25-pos D-Sub Male, Right-Angle, Multi-Mount Kit	8002-0100/0000-0479	1

- Features**
- This module is designed to interface directly with a fixed panel-mounted 15-position D-Sub, or with a cable, when DIN rail mounting is selected.
 - A multi-mount hardware kit is provided, including captive #4-40 screws, #4-40 jackscrews, and snap-in 35mm DIN rail feet that can also be trimmed & used to provide a stable, non-marring wiring platform, for free-hanging applications.
 - RoHS compliant.
 - Push-button **WAGO CAGE CLAMP® S** terminals.
 - For signal-level wiring, up to 30V.
 - Open-back, compact, low-profile construction.
 - Great for Din rail applications with limited enclosure depth.


Technical Data

Operating voltage	30V AC/DC
Nominal current	2 Amps
Connector contact	Au flash
Output wire connections	Cage Clamp S 0.2 – 1.5mm ² / AWG 24 – 16
Stripped wire length	8.5-9.5mm / 0.32-0.36"
Dimensions (mm) W x H x L (height from upper-edge of DIN rail)	56 x 20 x 57
Minimum temperature	-35°C (without impact)
Operating temperature	-20°C to 50°C
Maximum Humidity	95%

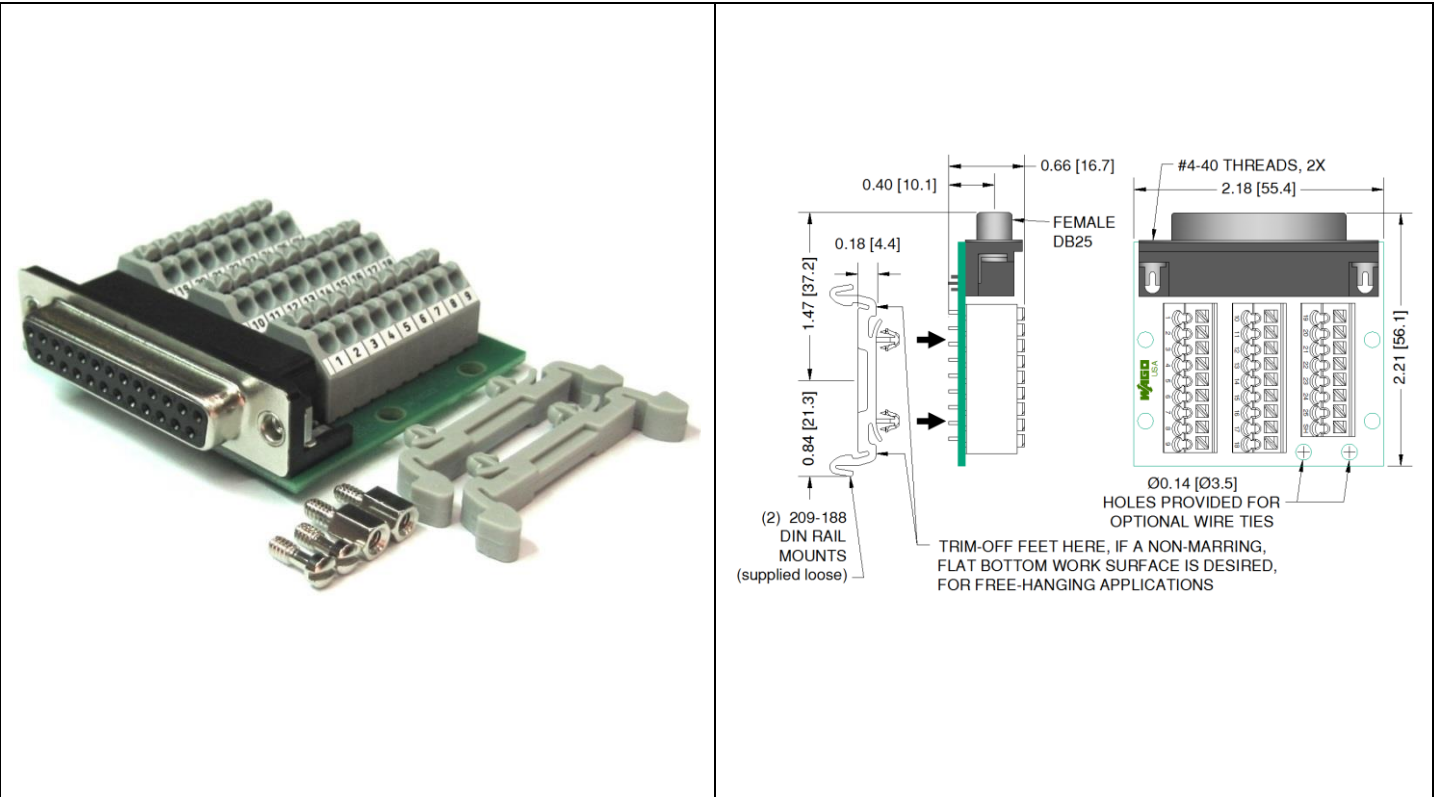

Description	Designation	Pack. Unit
Interface Module, 25-pos D-Sub Female, Right-Angle, Multi-Mount Kit	8002-0100/0000-0480	1

Features	Technical Data																		
<ul style="list-style-type: none"> This module is designed to interface directly with a fixed panel-mounted 15-position D-Sub, or with a cable, when DIN rail mounting is selected. A multi-mount hardware kit is provided, including captive #4-40 screws, #4-40 jackscrews, and snap-in 35mm DIN rail feet that can also be trimmed & used to provide a stable, non-marring wiring platform, for free-hanging applications. RoHS compliant. Push-button WAGO CAGE CLAMP® S terminals. For signal-level wiring, up to 30V. Open-back, compact, low-profile construction. Great for Din rail applications with limited enclosure depth. 	<table border="1"> <tr> <td>Operating voltage</td> <td>30V AC/DC</td> </tr> <tr> <td>Nominal current</td> <td>2 Amps</td> </tr> <tr> <td>Connector contact</td> <td>Au flash</td> </tr> <tr> <td>Output wire connections</td> <td>Cage Clamp S 0.2 – 1.5mm² / AWG 24 – 16</td> </tr> <tr> <td>Stripped wire length</td> <td>8.5-9.5mm / 0.32-0.36"</td> </tr> <tr> <td>Dimensions (mm) W x H x L (height from upper-edge of DIN rail)</td> <td>56 x 20 x 57</td> </tr> <tr> <td>Minimum temperature</td> <td>-35°C (without impact)</td> </tr> <tr> <td>Operating temperature</td> <td>-20°C to 50°C</td> </tr> <tr> <td>Maximum Humidity</td> <td>95%</td> </tr> </table>	Operating voltage	30V AC/DC	Nominal current	2 Amps	Connector contact	Au flash	Output wire connections	Cage Clamp S 0.2 – 1.5mm ² / AWG 24 – 16	Stripped wire length	8.5-9.5mm / 0.32-0.36"	Dimensions (mm) W x H x L (height from upper-edge of DIN rail)	56 x 20 x 57	Minimum temperature	-35°C (without impact)	Operating temperature	-20°C to 50°C	Maximum Humidity	95%
Operating voltage	30V AC/DC																		
Nominal current	2 Amps																		
Connector contact	Au flash																		
Output wire connections	Cage Clamp S 0.2 – 1.5mm ² / AWG 24 – 16																		
Stripped wire length	8.5-9.5mm / 0.32-0.36"																		
Dimensions (mm) W x H x L (height from upper-edge of DIN rail)	56 x 20 x 57																		
Minimum temperature	-35°C (without impact)																		
Operating temperature	-20°C to 50°C																		
Maximum Humidity	95%																		

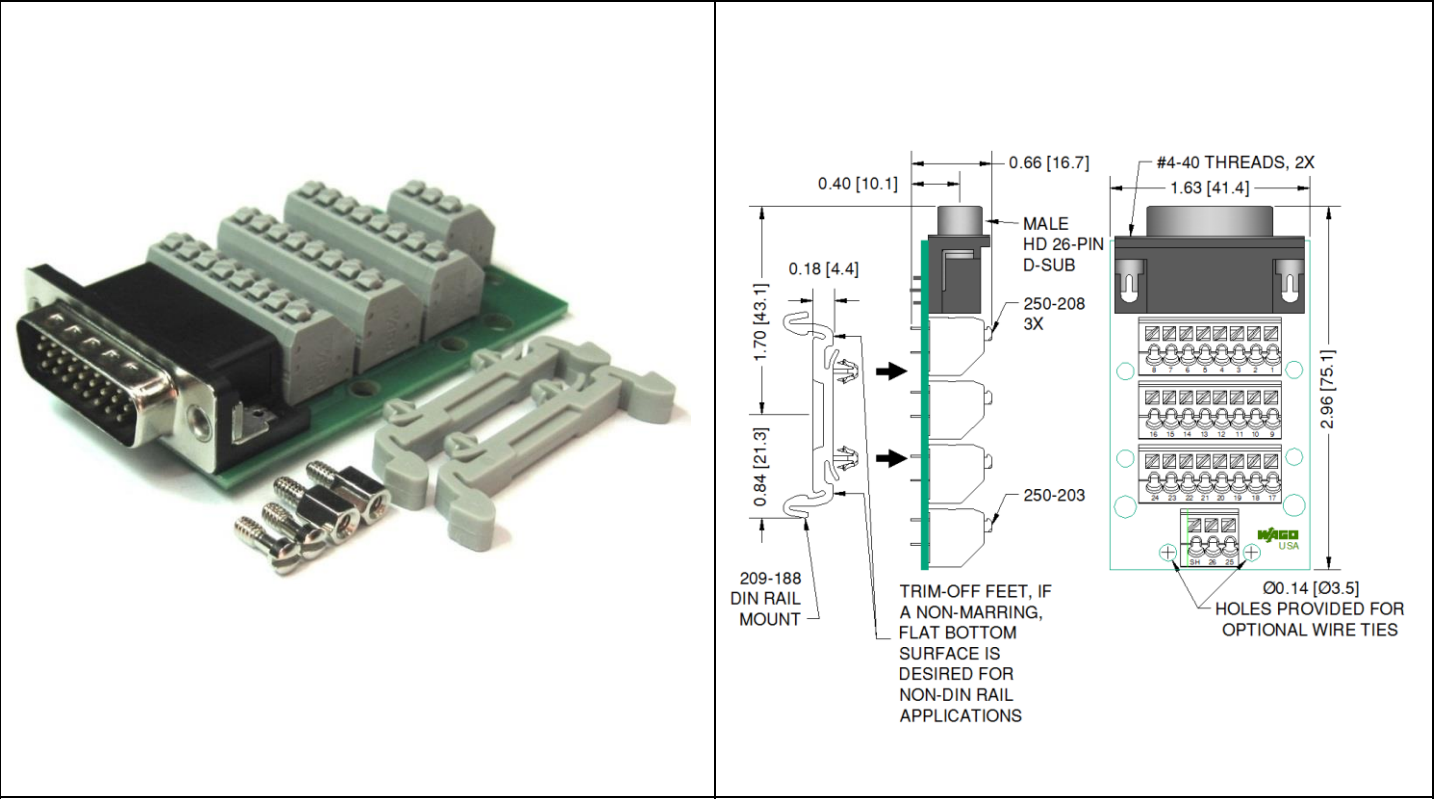



Description	Designation	Pack. Unit
Interface Module, HD 26-pos D-Sub Male, Right-Angle, Multi-Mount Kit	8002-0100/0000-0481	1

Features

- This module is designed to interface directly with a fixed panel-mounted high density 26-position D-Sub, or with a cable, when DIN rail mounting is selected.
- A multi-mount hardware kit is provided, including captive #4-40 screws, #4-40 jackscrews, and snap-in 35mm DIN rail feet that can also be trimmed & used to provide a stable, non-marring wiring platform, for free-hanging applications.
- RoHS compliant.
- Push-button **WAGO CAGE CLAMP® S** terminals.
- For signal-level wiring, up to 30V.
- Open-back, compact, low-profile construction.
- Great for Din rail applications with limited enclosure depth.

Technical Data

Operating voltage	30V AC/DC
Nominal current	1.5 Amps
Connector contact	Au flash
Output wire connections	Cage Clamp S 0.2 – 1.5mm ² / AWG 24 – 16
Stripped wire length	8.5-9.5mm / 0.32-0.36"
Dimensions (mm) W x H x L (height from upper-edge of DIN rail)	42 x 20 x 76
Minimum temperature	-35°C (without impact)
Operating temperature	-20°C to 50°C
Maximum Humidity	95%

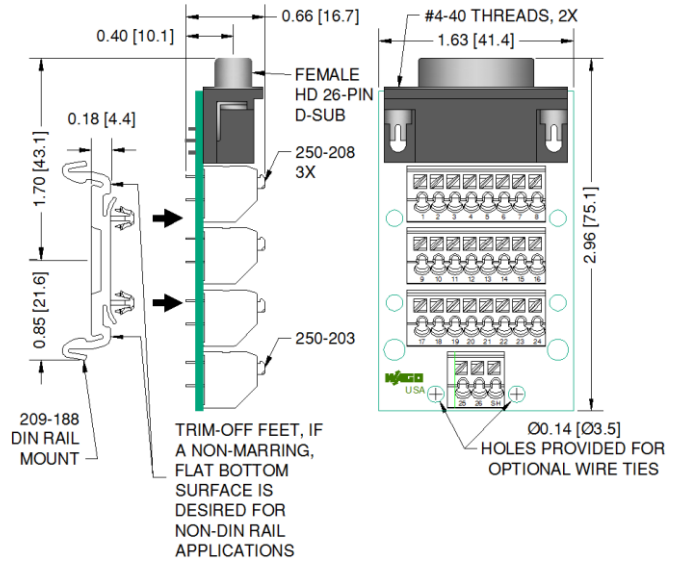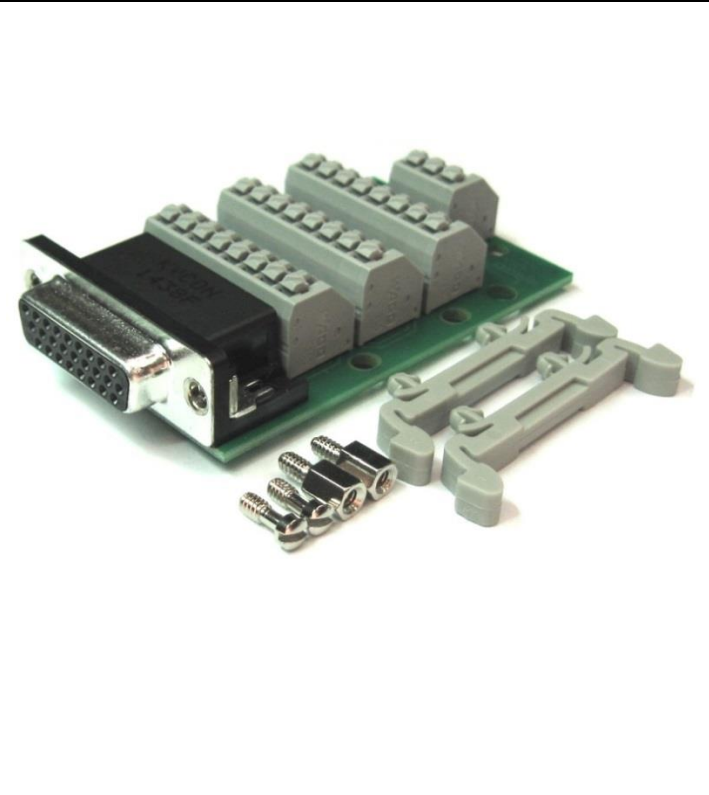

Description	Designation	Pack. Unit																		
Interface Module, HD 26-pos D-Sub Male, Right-Angle, Multi-Mount Kit	8002-0100/0000-0482	1																		
<p>Features</p> <ul style="list-style-type: none"> This module is designed to interface directly with a fixed panel-mounted high density 26-position D-Sub, or with a cable, when DIN rail mounting is selected. A multi-mount hardware kit is provided, including captive #4-40 screws, #4-40 jackscrews, and snap-in 35mm DIN rail feet that can also be trimmed & used to provide a stable, non-marring wiring platform, for free-hanging applications. RoHS compliant. Push-button WAGO CAGE CLAMP® S terminals. For signal-level wiring, up to 30V. Open-back, compact, low-profile construction. Great for Din rail applications with limited enclosure depth. 	<p>Technical Data</p> <table border="1"> <tr> <td>Operating voltage</td> <td>30V AC/DC</td> </tr> <tr> <td>Nominal current</td> <td>1.5 Amps</td> </tr> <tr> <td>Connector contact</td> <td>Au flash</td> </tr> <tr> <td>Output wire connections</td> <td>Cage Clamp S 0.2 – 1.5mm² / AWG 24 – 16</td> </tr> <tr> <td>Stripped wire length</td> <td>8.5-9.5mm / 0.32-0.36"</td> </tr> <tr> <td>Dimensions (mm) W x H x L (height from upper-edge of DIN rail)</td> <td>42 x 20 x 76</td> </tr> <tr> <td>Minimum temperature</td> <td>-35°C (without impact)</td> </tr> <tr> <td>Operating temperature</td> <td>-20°C to 50°C</td> </tr> <tr> <td>Maximum Humidity</td> <td>95%</td> </tr> </table>	Operating voltage	30V AC/DC	Nominal current	1.5 Amps	Connector contact	Au flash	Output wire connections	Cage Clamp S 0.2 – 1.5mm ² / AWG 24 – 16	Stripped wire length	8.5-9.5mm / 0.32-0.36"	Dimensions (mm) W x H x L (height from upper-edge of DIN rail)	42 x 20 x 76	Minimum temperature	-35°C (without impact)	Operating temperature	-20°C to 50°C	Maximum Humidity	95%	
Operating voltage	30V AC/DC																			
Nominal current	1.5 Amps																			
Connector contact	Au flash																			
Output wire connections	Cage Clamp S 0.2 – 1.5mm ² / AWG 24 – 16																			
Stripped wire length	8.5-9.5mm / 0.32-0.36"																			
Dimensions (mm) W x H x L (height from upper-edge of DIN rail)	42 x 20 x 76																			
Minimum temperature	-35°C (without impact)																			
Operating temperature	-20°C to 50°C																			
Maximum Humidity	95%																			