

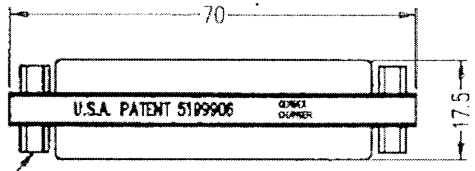


A
B
C
D
E
F
G

J1-DB37P FEMALE

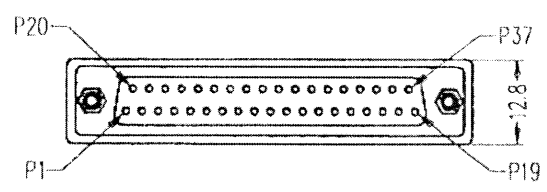

#4-40 NUT X4

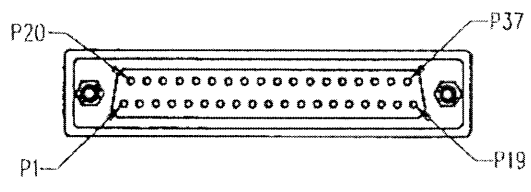

J2-DB37P FEMALE

NOTE:
DB37P F/1 SUPER THIN G.C.
1. CONNECTOR:
J1-DB37P FEMALE
J2-DB37P FEMALE
2. PIN OUT: 1 : 1

SPECIFICATION:
1. SHELL:
STEEL, ZINC PLATED OR TIN PLATED
2. PIN CONTACT:
GOLD PLATED OVER NICKEL
3. INSULATOR:
PBT GLASS FIBRE REINFORCED
UL 94 V0
4. CURRENT RATING: 5 AMP
5. DIELECTRIC STRENGTH:
1000V FOR ONE MINUTE
6. INSULATOR RESISTANCE:
1000M MIN AT 500V DC
7. TEMPERATURE: -55°C~+105°C

1-0	REV	DESCRIPTION	DATE	ECN NO.
DWC NAME:		DB37P F/1 SUPER THIN G.C.		
C. W. NO.:		CUS. ID.:		
CUS. NO.:		DWC. NO.:		
SHEET:	1/1	TOLERANCE:	UNIT:	M/M
		. X		
		. XX .0010	DRAW. BY:	
		SCALE:	HOME	CHECKED

8107

THIS IS THE FEMALE VERSION OF 8106

8106 = 4009708

8107 = 4009710