


# Teflon Heat Shrink Tubing



**HS Heat Shrink:** Is a heat shrinkable PTFE Tubing. Upon the application of heat in excess of 350°C (662°F), the tubing shrinks and conforms to the geometry of the part to be covered. Stiffness, combined with chemical inertness, makes it an excellent strain relief for high temperature electrical connections with contaminated environments.

Size	Inside Diameter				Recovered Wall thickness		M23053/12	Standard Packages					
	Expanded I.D.		Recover I.D.		Inches	(mm)		4 Foot Lengths			6 Inch Lengths		
	Inch	(mm)	Inch	(mm)				Part Number	Qty	Total Footage	Part Number	Qty	Total Footage
5/64	0.078	1.98	0.025	0.635	0.009±0.002	0.229±0.051	501	8416-0887	25	100	3494	25	12.5
1/8	0.125	3.18	0.037	0.940	0.010±0.002	0.254±0.051	502	8416-0888	25	100	3495	25	12.5
3/16	0.188	4.78	0.050	1.27			503	8416-0889	25	100	3496	25	12.5
1/4	0.250	6.35	0.063	1.60			504	8416-0890	25	100	3497	25	12.5
5/16	0.313	7.95	0.078	1.98			505	8416-0891	25	100	3498	25	12.5
3/8	0.375	9.53	0.096	2.44			506	8416-0892	25	100	3499	25	12.5
7/16	0.438	11.13	0.112	2.84			507	8416-0893	25	100	3500	25	12.5
1/2	0.500	12.70	0.144	3.66			508	8416-0894	25	100	3501	10	5
5/8	0.625	15.88	0.178	4.52	0.015±0.004	0.381±0.102	510	8416-0895	8	32	3502	10	5
3/4	0.750	19.05	0.224	5.69			512	8416-0896	8	32	3503	10	5
7/8	0.875	22.23	0.244	6.20			513	8416-0897	8	32	3504	10	5
1	1.000	25.40	0.278	7.06			514	8416-0898	8	32	3505	5	2.5
1 1/4	1.250	31.75	0.347	8.81			515	8416-0899	8	32	3506	5	2.5

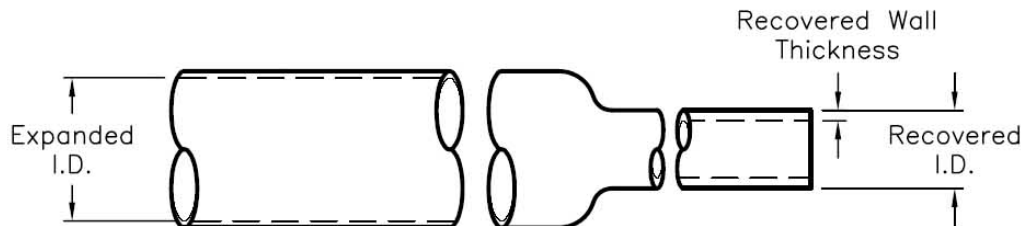

**SPECIFICATIONS:**

1. Meets Specifications:  
AMS-DTL-23053/12, Class 5  
ASTM D 2902 Type I  
AMS 3584
2. Shrink Ratio: 4:1
3. Shrink Temperature: 662°F (350°C)
4. Continuous Operating Temperature: -100°F ~ 500°F (-73°C ~ 260°C)
5. Dielectric Strength: > 1,400 V/M
6. Dielectric Constant: 2.1
7. Volume Resistivity: <10<sup>18</sup>
8. Tensile Strength: 2,500 psi
9. Elongation: 200% Min.
10. Longitudinal Change: ± 20%
11. Specific Gravity: 2.17
12. Water Absorption: < 0.01%
13. Good flexibility and abrasion resistance
14. Excellent fungus, chemical, oil, solvent and acids resistance
15. Flammability: Not flammable
16. Standard Length: (See Chart)
17. Pieces Per Package: (See chart)
18. Color: Natural (translucent to opaque white)

**Important Notice:** This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Pro -POWER is the registered trademark of the Group. © Premier Farnell plc 2011.