

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0850844808](#)  
**Status:** **Active**  
**Overview:** SRC - Sealed Rectangular Connectors  
**Description:** SRC Housing, Female, Hybrid 56 Pin Mixed Power and Signal (48 x MX150 + 8 x MX150L), SPS/Nylon, Black

**Documents:**

|   |   |
|---|---|
| <a href="#">Drawing (PDF)</a>                           | <a href="#">Packaging Specification 937320001-K (PDF)</a> |
| <a href="#">Product Specification 850700010-K (PDF)</a> | <a href="#">RoHS Certificate of Compliance (PDF)</a>      |
| <a href="#">Product Specification 937320001-P (PDF)</a> | <a href="#">Product Literature (PDF)</a>                  |

**General**

|                             |   |
|-----------------------------|---|
| Product Family              | Crimp Housings                                      |
| Series                      | <a href="#">85084</a>                               |
| Application                 | Power, Signal, Wire-to-Wire                         |
| Overview                    | <a href="#">SRC - Sealed Rectangular Connectors</a> |
| Product Literature Order No | 987650-7391   |
| Product Name                | SRC   |
| UPC                         | 887191140520  |


**Physical**

|                               |                           |
|-------------------------------|---------------------------|
| Circuits (maximum)            | 56                        |
| Circuits Detail               | 48 x MX150™ + 8 x MX150L™ |
| Color - Resin                 | Black                     |
| Gender                        | Receptacle                |
| Glow-Wire Capable             | No                        |
| Keying to Mating Part         | None                      |
| Lock to Mating Part           | Yes                       |
| Material - Resin              | SPS/Nylon                 |
| Net Weight                    | 108.880/g                 |
| Number of Rows                | 11                        |
| Packaging Type                | Tray                      |
| Panel Mount                   | No                        |
| Pitch - Mating Interface      | 0.30mm                    |
| Polarized to Mating Part      | Yes                       |
| Stackable                     | No                        |
| Temperature Range - Operating | -40° to +125°C            |

**Material Info**

**Reference - Drawing Numbers**

|                         |                          |
|-------------------------|--------------------------|
| Packaging Specification | 937320001-K              |
| Product Specification   | 850700010-K, 937320001-P |
| Sales Drawing           | 850840700-000            |

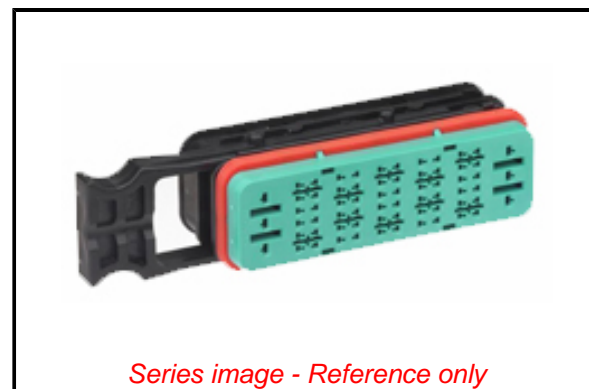

*Series image - Reference only*

**EU ELV**

**Not Relevant**

**EU RoHS**

**Not Reviewed**

**REACH SVHC**

Not Reviewed

**Halogen-Free**

**Status**

**Not Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[85084 Series](#)

**Mates With**

SRC Power Blade Housing [937924808](#)

**Use With**

MX150 Female Terminals [33012](#) . MX150L Female Terminal [19434](#)