


DuraTite® and Ever-Lok® Locking Connections

Standard Service Female Receptacles

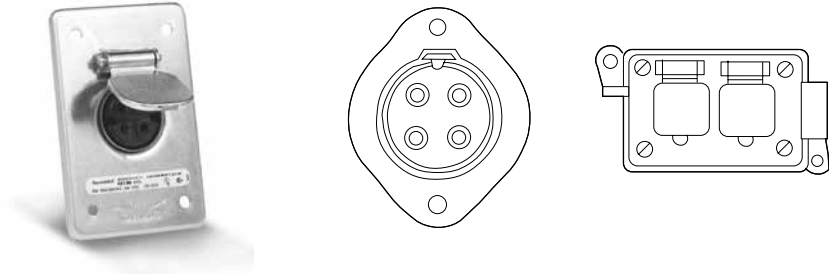

POLES/WIRES	RATING	SINGLE RECEPTACLE		FLANGED PANEL MOUNT RECEPTACLE	DUPLEX RECEPTACLE	
		RECEPTACLE ONLY	WITH BACK BOX		RECEPTACLES ONLY	WITH BACK BOX
2P3W	10 Amp, 250VDC	8703	8753	8943	8733	8773
	20 Amp, 250VAC*					
	20 Amp, 125VAC					
3P4W	15 Amp, 250VAC	8703U1	8753U1	8943U1	8733U1	8773U1
	10 Amp, 125VDC	8703U2	8753U2	8943U1	8733U2	8773U2
4P5W	20 Amp, 250VAC**	8704	8754	8944	8734	8774
	10 Amp, 125VDC	8705	8755	8945	8735	8775
	20 Amp, 250VAC**					

Notes:

* ½ hp, 1-Phase, 230VAC
 **1 hp, 3-Phase, 115VAC

Specifications

- Receptacle Housing: Heavy gauge steel, plated
- Back Boxes: Type FSWS-62 standard, cast aluminum; Additional boxes available, see **page H-423**
- Gang Type: Can be furnished in gang or tandem units and in combination with other FS and FD devices; see **page H-423**
- Outlets: Standard, one ¼" top or bottom; additional outlets charged extra; see boxes listed on **page H-423**
- Plug and Connector Housings: Steel, plated
- Cable Diameter: Clamp Type: .500" max. cable diameter
- Bushing Type:
 - 2P3W — .563" diameter standard
 - 3P4W — .281" diameter standard
 - 4P5W — .594" diameter standard
- Cable Bushing: Oil-resistant Neoprene cable bushing regularly furnished with hole size as listed. Other hole sizes available at no extra cost when specified on order; see **page H-425** for available sizes