


GSD

875-3-M09

REVISIONS	
ISSUE	CHANGES
6	CN 25120 C MCD 08/30/85

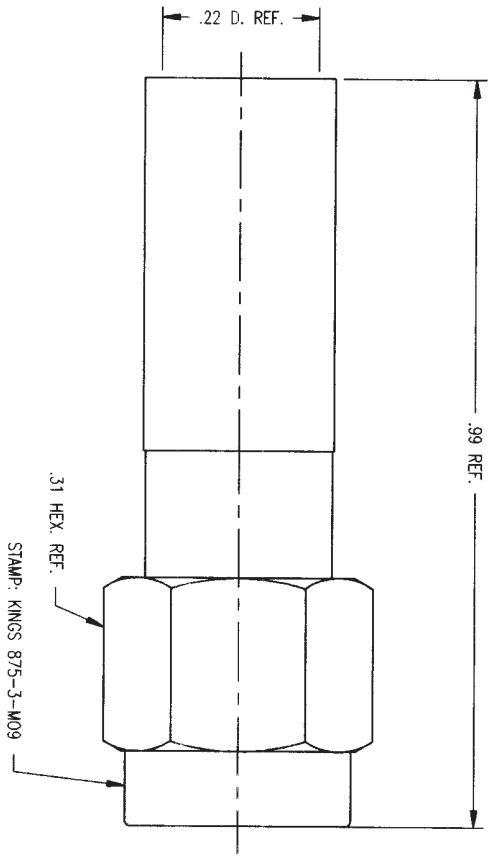

- NOTES:
1. FOR USE WITH RG-223, 55, 142 AND 400 CABLE.
 2. FOR CABLING INSTRUCTIONS SEE CP-432.
 3. FOR CABLE TRIMMING USE KIT-78 & KIT-116.
 4. FOR GRIPPING USE DIE KTH-2001.
 5. INTERFACE PER MIL-STD-348, FIG. 310-1.
 7. CONTACT TO BE SUPPLIED UNASSEMBLED.
 8. MATERIALS:
INSULATOR: TEFLON, ASTM-D-4894
GASKET: SILICONE RUBBER, ZZ-R-765
K-GRP SLEEVE: COWIL BRONZE, ASTM-B-135
CENTER CONTACT: BRASS, ASTM-B16
 9. FINISHES:
ALL OTHER METAL PARTS: BEF: COPPER, ASTM-B-196
 10. ELECTRICAL CHARACTERISTICS:
ALL METAL PARTS: GOLD PLATE PER MIL-G-45204
NOMINAL IMPEDANCE: 50Ω
FREQUENCY RANGE: DC TO 12.4 GHz
WORKING VOLTAGE: 500 VOLTS RMS

GSD

SCALE	6:1		
APPROX SURFACE AREA			
USED ON			
REF:			
PLUG, SMA			
DRAWN	ME	DATE	06/05/95
DESIGN	MJB	DATE	06/05/95
APPR.		DATE	
 ELECTRONICS CO., INC. TUCKAHOE, NEW YORK 10707			
875-3-M09			