

FEATURES AND SPECIFICATIONS

Features and Benefits

- LFH™ (Low Force Helix) rugged contacts offer increased life cycle, mechanical and electrical reliability
- Supports up to 1.65 Gbs bandwidth per differential pair
- Fully shielded against RFI/EMI
- Grounding detents on mating shell
- Solder tails for cable termination
- Positive retention jackscrew: thread 4-40 UNC-2A

Reference Information

Product Specification: PS-74320-001
 Packaging: Bag
 Mates With: 74320 receptacles
 Designed In: Millimeters

Electrical

Voltage: 40V
 Current: 1.5A
 Dielectric Withstanding Voltage: 500V
 Insulation Resistance: 1000 M Ω min.

Mechanical

Mating Force: 10.0 lbf (4.5kgf) max.
 Unmating Force: 2.2 lbf (1.0kgf) min.
 Durability: 100 cycles



Physical

Plating: Gold flash, 30 μ Gold available upon request
 Temperature: -20 to +85°C

molex® MicroCross™ DVI Digital Visual Interface Shielded I/O Cable Assembly

88741

DVI-Digital to DFP

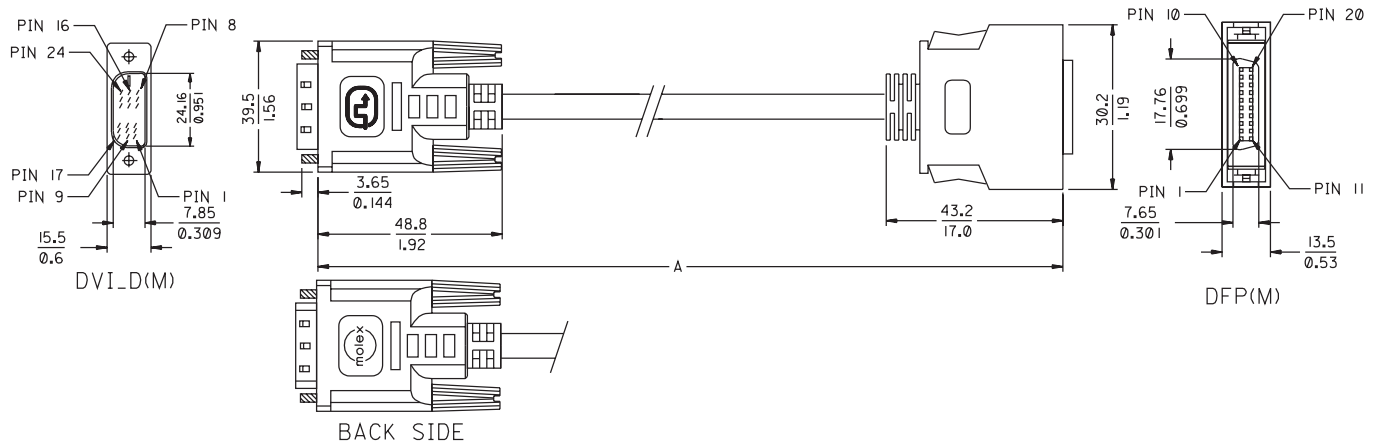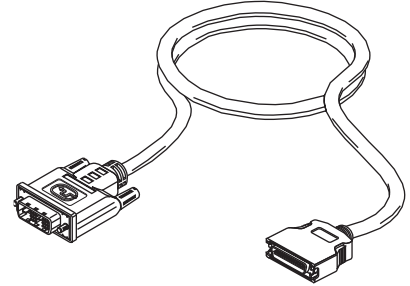

ORDERING INFORMATION AND DIMENSIONS

Order No.	Description	Dimension A	Color
88741-8600	DVI-Digital to DFP Digital Cable Assembly	2m (6.56ft)	Black
88741-8610	DVI-Digital to DFP Digital Cable Assembly	3m (9.84ft)	Black
88741-8620	DVI-Digital to DFP Digital Cable Assembly	5m (16.40ft)	Black
88741-8601	DVI-Digital to DFP Digital Cable Assembly	2m (6.56ft)	White
88741-8611	DVI-Digital to DFP Digital Cable Assembly	3m (9.84ft)	White
88741-8621	DVI-Digital to DFP Digital Cable Assembly	5m (16.40ft)	White