

VSPC
VSPC RS485 2CH

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

**Data surge protection**

- for RS 422 and RS 485 signals
- Can also be connected as T branch with K21 wall-mounted housing

General ordering data

Type	VSPC RS485 2CH
Order No.	8924670000
Version	Surge protection for instrumentation and control, 5 V, 5 V, 450 mA, IEC 61643-21
GTIN (EAN)	4032248696314
Qty.	1 pc(s).

Creation date August 9, 2020 1:51:07 AM CEST

Catalogue status 24.07.2020 / We reserve the right to make technical changes.

VSPC
VSPC RS485 2CH

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data**Dimensions and weights**

Width	17.8 mm	Width (inches)	0.701 inch
Height	90 mm	Height (inches)	3.543 inch
Depth	69 mm	Depth (inches)	2.717 inch
Net weight	27.5 g		

Temperatures

Humidity	5...96 %	Operating temperature, max.	70 °C
Operating temperature, min.	-40 °C	Storage temperature, max.	80 °C
Storage temperature, min.	-40 °C	Operating temperature	-40 °C...70 °C
Storage temperature	-40 °C...80 °C		

Probability of failure

λges	57	MTTF	2,003 Years
PFH in 1*10 ⁻⁹ per hour	4.25	SFF	92.54 %
SIL in compliance with IEC 61508	3		

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Rated data UL

Certificate No. (UL)	E311081	UL certificate	UL 497b Certificate
----------------------	---------	----------------	---------------------

CSA protection data

Gas group C	IIB	Gas group D	IIA
Gas groups A, B	IIC	Input voltage, max. U _i	6.4 V
Internal capacity, max. C _i	11 nF	Internal inductance, max. L _i	0 μH

General data

Colour	orange	Design	Terminal, miscellaneous
Protection degree	IP20	Segment	Measurement - Monitoring - Setting
UL 94 flammability rating	V-0	Version	without warning function / function indicator

Insulation coordination acc. to EN 50178

Pollution severity	2	Surge voltage category	III
--------------------	---	------------------------	-----

VSPC
VSPC RS485 2CH

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data**Rated data IEC / EN**

Rated voltage (AC)	5 V	Rated voltage (DC)	5 V
Voltage type	AC/DC	Max. continuous voltage, U _c (AC)	5 V
Max. continuous voltage, U _c (DC)	6.4 V	Discharge current I _n (8/20µs) GND-PE	2.5 kA
Discharge current I _{max} (8/20µs) GND-PE	10 kA	Discharge current I _n (8/20µs) wire-PE	2.5 kA
Discharge current I _{max} (8/20µs) wire-PE	2 x 10 kA	Discharge current I _n (8/20µs) wire-wire	2.5 kA
Discharge current I _{max} (8/20µs) wire-wire	10 kA	Lightning test current, I _{imp} (10/350 µs) GND-PE	0.2 kA
Lightning test current, I _{imp} (10/350 µs) Wire-PE	2 x 0.2 kA	Lightning test current, I _{imp} (10/350 µs) wire-wire	0.2 kA
Standards	IEC 61643-21	Protection level U _p (typ.)	250 V
Protection level on output side Wire-PE 1kV/µs, typically	10 V	Protection level on output side Wire-wire 1 kV/µs, typically	10 V
Protection level on output side Wire-wire 8/20 µs, typically	15 V	Protection level, U _p GND - PE	500 V
Protection level, U _p wire - PE	35 V	Insertion loss	113.7 MHz
Number of poles	1	Overload - failure mode	Modus 2
Protection level, U _p wire - wire	15 V	Pulse-reset capacity	≤ 20 ms
Rated current I _N	450 mA	Requirements category acc. to IEC 61643-21	C1, C2, C3, D1
Signal transmission properties (-3 dB)	113.6 MHz	Signalling contact	No
Surge current-carrying capacity C1	< 1 kA 8/20 µs	Surge current-carrying capacity C2	5 kA 8/20 µs
Surge current-carrying capacity C3	100 A 10/1000 µs	Surge current-carrying capacity D1	2.5 kA 10/350 µs
Volume resistance	2.20 Ω		

Further details of approvals

GOST certificate GOST-Zertifikat

Connection data

Type of connection Pluggable in VSPC BASE

Classifications

ETIM 6.0	EC000943	ETIM 7.0	EC000943
eClass 9.0	27-13-08-07	eClass 9.1	27-13-08-07
eClass 10.0	27-13-08-07	UNSPSC	30-21-19-21

Approvals

Approvals



ROHS Conform

Data sheet**VSPC
VSPC RS485 2CH****Weidmüller Interface GmbH & Co. KG**
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com**Technical data****Downloads**


Approval/Certificate/Document of Conformity	SIL Paper CE PAPER Declaration of Conformity
Brochure/Catalogue	CAT 4.4 ELECTR 16/17 EN
Engineering Data	EPLAN, WSCAD
Engineering Data	STEP
User Documentation	Instruction sheet

**VSPC
VSPC RS485 2CH**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings



Electric symbol

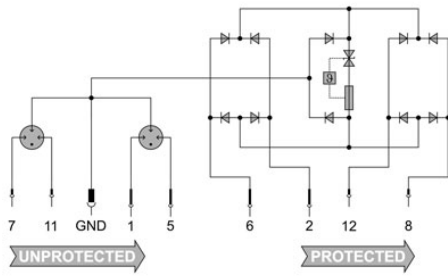


Circuit diagram

Cate- gory	Testing pulse	Surge voltage	Surge current	Pulse Type
C1	Quick-rising edge	0.5 - 2 kV 1.2/50 µs	0.25 - 1 kA mit 8/20 µs	300 Surge voltage arrester
C2	Quick-rising edge	2 - 10 kV 1.2/50 µs	1 - 5 kA mit 8/20 µs	10 Surge voltage arrester
C3	Quick-rising edge	≥ 1 kV 1 kV/µs	10 - 100 A mit 10/10000 µs	300 Surge voltage arrester
D1	High power	≥ 1 kV	0.5 - 2.5 kA mit 10/350 µs	2 Arrester for lightning current and surge voltages

Discharge capacity

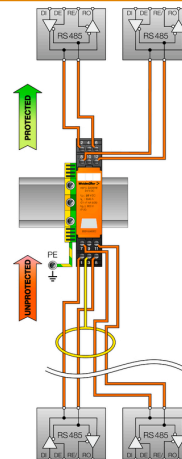

Komplettmodul direkte Erdung



Komplettmodul indirekte Erdung
Komplettmodul