


9-1419126 -7 Product Details

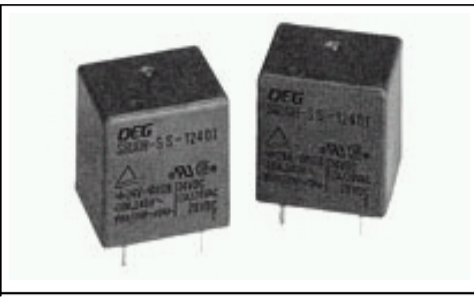

9-1419126 -7

TE Internal Number: 9 - 1419126 -7

 [Active](#)

 [Add to Part List](#)

Industrial Relays (General Purpose)

[Always EU RoHS compliant but not ELV Compliant](#)
([Statement of Compliance](#))

Product Highlights:

- ? SRUDH Series
- ? Contact Arrangement = 1 Form C, SPDT, 1 C/O
- ? Contact Current Rating = 12 Amps.
- ? Monostable Coil Magnetic System
- ? Without Coil Suppression Diode

[View all Features](#) | [Find Similar Products](#)

Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)
- [Request Samples](#)

NEW!

Documentation & Additional Information

Product Drawings:

- ? [None Available](#)

Catalog Pages/Data Sheets:

- ? [None Available](#)

Product Specifications:

- ? [None Available](#)

Application Specifications:

- ? [None Available](#)

Instruction Sheets:

- ? [None Available](#)

CAD Files:

- ? [None Available](#)

Additional Information:

- ? [Product Line Information](#)

Additional Product Images:

- ? [Schematic](#)
- ? [Wiring Diagram](#)
- ? [PCB Layout \(Bottom Surface\)](#)

Related Products:

- ? [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- ? [Termination Type](#) = Through Hole

Electrical Characteristics:

- ? [Contact Current Rating \(Amps.\)](#) = 12
- ? [Coil Resistance \(?\)](#) = 70
- ? [Coil Power, Nominal \(mW\)](#) = 360
- ? [Actuating System](#) = DC
- ? [Input Voltage \(VDC\)](#) = 5

Body Related Features:

- ? [Series](#) = SRUDH
- ? Polarized = No

Contact Related Features:

- ? [Mounting Options](#) = PC Board
- ? [Enclosure](#) = Flux -Tight
- ? FCC Part 68 Isolation = No
- ? Relay Type = PCB
- ? [Contact Material](#) = Silver Cadmium Oxide
- ? Approx. Dimensions (L x W x H) (mm [in]) = 20.30 x 16.50 x 20.60 [.800 x .650 x .811]
- ? Approved Standards = UL Recognized, TUV Approved, CSA Certified

Configuration Related Features:

- ? [Contact Arrangement](#) = 1 Form C, SPDT, 1 C/O
- ? [Coil Magnetic System](#) = Monostable
- ? [Coil Suppression Diode](#) = Without
- ? [Coil Selection Criteria](#) = Nominal Voltage
- ? Coil Latching = Without
- ? [LED Indicator](#) = Without

Industry Standards:

- ? [RoHS/ELV Compliance](#) = RoHS/Not ELV Compliant
- ? [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- ? RoHS/ELV Compliance History = Always was RoHS not ELV compliant

Other:

- ? Brand = OEG