

**MICRO SWITCH**  
 FREEPORT ILLINOIS, U.S.A.  
 A DIVISION OF HONEYWELL  
 FED. MFG. CODE 91929

**MINIATURE PRECISION  
 LIMIT SWITCH**

924CE2-S9

924CE2-S9

M

DRAWING NUMBER

ISSUE

REVISIONS

1

2

3

4

5

6

7

8

9

10

REPLACES

RELEASE NO. PR-16639

CHECK




CHECK

3 AUG 68


CHECK

3 AUG 68

LJF

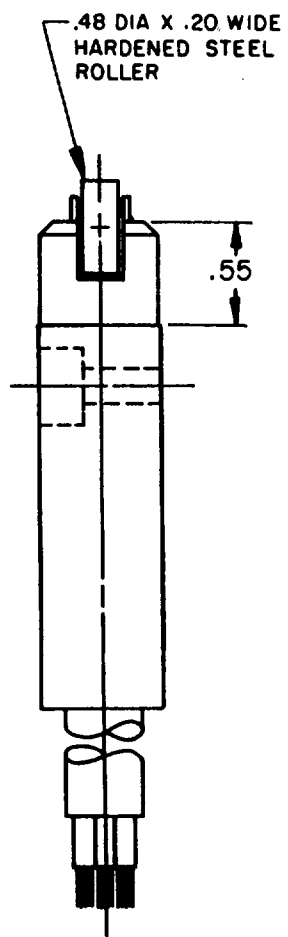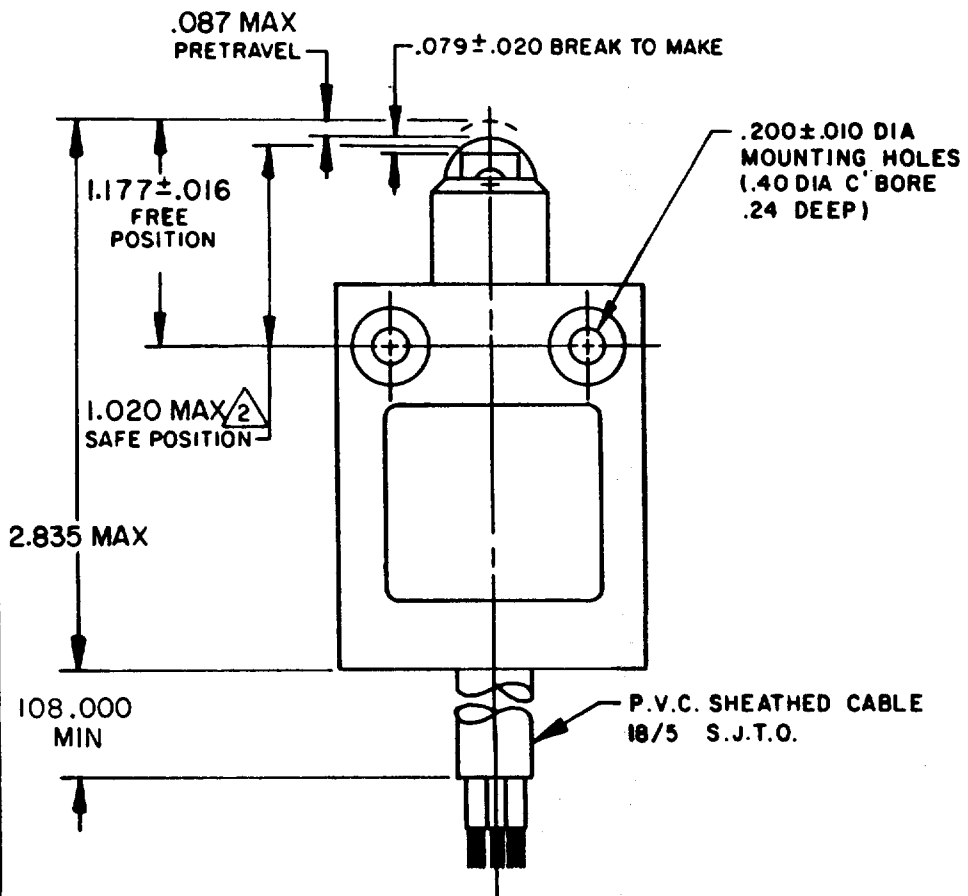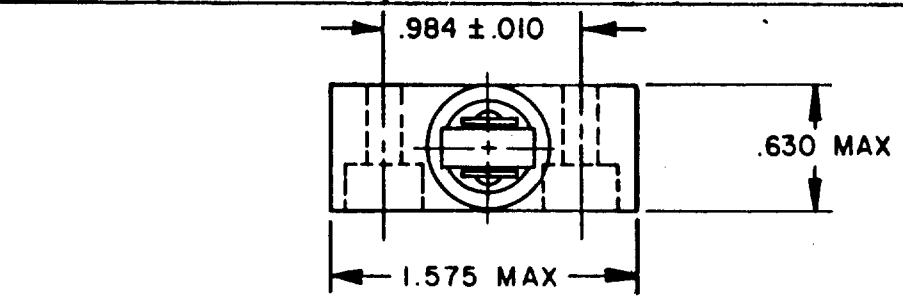


- NOTES**
- 1 - ZINC HOUSING FINISHED WITH GREY PAINT
  - △ THE MINIMUM PLUNGER TRAVEL PAST BREAK, FOR A SAFE CONTACT GAP IS .060
  - 3 - SWITCH PROVIDES BREAK BEFORE MAKE CIRCUITRY



**CIRCUIT DIAGRAM**

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE - - - - - 5.1 LB MAX	CONTACT ARRANGEMENT S P D T D B	DO NOT SCALE PRINT
OVERTRAVEL - - - - - .039 MIN	10A - 250 VAC 1/3HP - 125 OR 250 VAC <i>RJ</i>	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
		ONE PLACE (.0) ± .030
		TWO PLACE (.00) ± .015
		THREE PLACE (.000) ± .005
		ANGLES ±
		WEIGHT

FO-52849-A

DRAWN

3 AUG 68