



PL-Q 4 Pin

PL-Q 16W/835/4P 1CT/10BOX

PL-Q is an efficient, square-shaped compact fluorescent lamp, typically used in decorative-lighting luminaires. While offering the advantage of energy-efficient operation, it also provides design freedom for flat ceiling or wall fixtures in particular, due to its low built-in height and uniform spread of light. The 4-pin version is designed for operation on electronic gear.

Product data

General Information	
Cap-Base	GR10Q [GR10q]
Life to 50% Failures Preheat (Nom)	13000 h
LSF Preheat 2000 h Rated	99 %
LSF Preheat 4000 h Rated	98 %
LSF Preheat 6000 h Rated	95 %
LSF Preheat 8000 h Rated	89 %
LSF Preheat 16000 h Rated	22 %
LSF Preheat 20000 h Rated	4 %
Light Technical	
Color Code	835 [CCT of 3500K]
Luminous Flux (Nom)	1050 lm
Luminous Flux (Rated) (Nom)	1050 lm
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3500 K
Luminous Efficacy (rated) (Nom)	66.6 lm/W
Color Rendering Index (Nom)	63
	82
LLMF 2000 h Rated	90 %
LLMF 2000 h Rated LLMF 4000 h Rated	
	90 %
LLMF 4000 h Rated	90 %

LLMF 12000 h Rated	79 %
LLMF 16000 h Rated	78 %
LLMF 20000 h Rated	78 %
Operating and Electrical	
Power (Nom)	16.0 W
Lamp Current (Nom)	0.195 A
Temperature	
Design Temperature (Nom)	25 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Cap-Base Information	4 Pins
Approval and Application	
Energy Efficiency Label (EEL)	А
Mercury (Hg) Content (Nom)	4 mg
Energy Consumption kWh/1000 h	18 kWh


Datasheet, 2020, March 19 data subject to change

PL-Q 4 Pin

Product Data			
Full product code	871150027206525		
Order product name	PL-Q 16W/835/4P 1CT/10BOX		
EAN/UPC - Product	8711500272065		
Order code	927939183540		
Numerator - Quantity Per Pack	1		

Numerator - Packs per outer box	10
Material Nr. (12NC)	927939183540
Net Weight (Piece)	68.000 g
ILCOS Code	FSS-16/35/1B-E-GR10q

Dimensional drawing




PL-Q 16W/835/4P

Product	U (max)	D (max)	D1 (max)	C (max)	C1 (max)	F (max)	E (max)
PL-Q 16W/	40 mm	13.7 mm	27.5 mm	138 mm	49 mm	40.5 mm	135 mm
835/4P 1CT/							
10BOX							

Photometric data


711

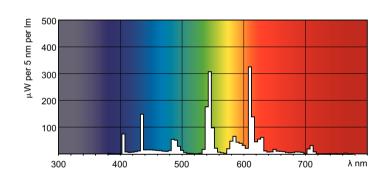


LDPB_PLQ4P_835-Spectral power distribution B/W



Lifetime






LDLM_PLQ4P_0001-Lumen maintenance diagram

LDLE_PLQ4P_0002-Life expectancy diagram

PL-Q 4 Pin

Lifetime

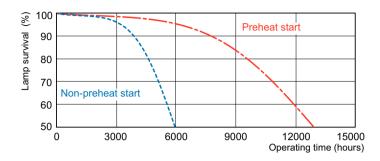

LDLE_PLQ4P_0001-Life expectancy diagram

