



PL-Q 4 Pin

PL-Q 28W/835/4P 1CT/10BOX

PL-Q is an efficient, square-shaped compact fluorescent lamp, typically used in decorative-lighting luminaires. While offering the advantage of energy-efficient operation, it also provides design freedom for flat ceiling or wall fixtures in particular, due to its low built-in height and uniform spread of light. The 4-pin version is designed for operation on electronic gear.

Product data

General Information			
Cap-Base	GR10Q [GR10q]		
Life to 50% Failures Preheat (Nom)	13000 h		
LSF Preheat 2000 h Rated	99 %		
LSF Preheat 4000 h Rated	98 %		
LSF Preheat 6000 h Rated	95 %		
LSF Preheat 8000 h Rated	89 %		
LSF Preheat 16000 h Rated	22 %		
LSF Preheat 20000 h Rated	4 %		
Light Technical			
Color Code	835 [CCT of 3500K]		
Luminous Flux (Nom)	2050 lm		
Luminous Flux (Rated) (Nom)	2050 lm		
Color Designation	White (WH)		
Correlated Color Temperature (Nom)	3500 K		
Luminous Efficacy (rated) (Nom)	73.2 lm/W		
Color Rendering Index (Nom)	82		
LLMF 2000 h Rated	90 %		
LLMF 4000 h Rated	86 %		
LLMF 6000 h Rated	83 %		
LLMF 8000 h Rated	80 %		

LLMF 12000 h Rated	79 %
LLMF 16000 h Rated	78 %
LLMF 20000 h Rated	78 %
Operating and Electrical	
Power (Nom)	24.8 W
Lamp Current (Nom)	0.320 A
Temperature	
Design Temperature (Nom)	25 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Cap-Base Information	4 Pins
Approval and Application	
Energy Efficiency Label (EEL)	A
Mercury (Hg) Content (Nom)	4 mg
Energy Consumption kWh/1000 h	31 kWh


Datasheet, 2020, March 19 data subject to change

PL-Q 4 Pin

Product Data			
Full product code	871150026967625 PL-Q 28W/835/4P 1CT/10BOX		
Order product name			
EAN/UPC - Product	8711500269676		
Order code	927939383540		
Numerator - Quantity Per Pack	1		

Numerator - Packs per outer box	10
Material Nr. (12NC)	927939383540
Net Weight (Piece)	127.000 g
ILCOS Code	FSS-28/35/1B-E-GR10q

Dimensional drawing




PL-Q 28W/835/4P

Product	U (max)	D (max)	D1 (max)	C (max)	C1 (max)	F (max)	E (max)
PL-Q 28W/	46.5 mm	18.9 mm	33 mm	203 mm	76 mm	41 mm	200 mm
835/4P 1CT/							
10BOX							

Photometric data

711

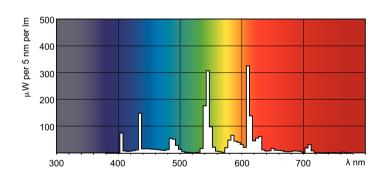


LDPB_PLQ4P_835-Spectral power distribution B/W

LDPO_PLQ4P_835-Spectral power distribution Colour

Lifetime






LDLM_PLQ4P_0001-Lumen maintenance diagram

LDLE_PLQ4P_0002-Life expectancy diagram

PL-Q 4 Pin

Lifetime

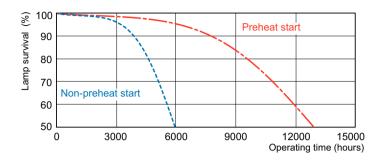

LDLE_PLQ4P_0001-Life expectancy diagram

