



# PL-Q 4 Pin

# PL-Q 38W/835/4P 1CT/10BOX

PL-Q is an efficient, square-shaped compact fluorescent lamp, typically used in decorative-lighting luminaires. While offering the advantage of energy-efficient operation, it also provides design freedom for flat ceiling or wall fixtures in particular, due to its low built-in height and uniform spread of light. The 4-pin version is designed for operation on electronic gear.

#### **Product data**

General Information				
Cap-Base	GR10Q [ GR10q]			
Life to 50% Failures Preheat (Nom)	13000 h			
LSF Preheat 2000 h Rated	99 %			
LSF Preheat 4000 h Rated	98 %			
LSF Preheat 6000 h Rated	95 %			
LSF Preheat 8000 h Rated	89 %			
LSF Preheat 16000 h Rated	22 %			
LSF Preheat 20000 h Rated	4 %			
Light Technical				
Color Code	835 [ CCT of 3500K]			
Luminous Flux (Nom)	2850 lm			
Luminous Flux (Rated) (Nom)	2850 lm			
Color Designation	White (WH)			
Correlated Color Temperature (Nom)	3500 K			
Luminous Efficacy (rated) (Nom)	75 lm/W			
Color Rendering Index (Nom)	82			
LLMF 2000 h Rated	90 %			
LLMF 4000 h Rated	86 %			
LLMF 6000 h Rated	83 %			
LLMF 8000 h Rated	80 %			

LLMF 12000 h Rated	79 %
LLMF 16000 h Rated	78 %
LLMF 20000 h Rated	78 %
Operating and Electrical	
Power (Nom)	35.5 W
Lamp Current (Nom)	0.430 A
Temperature	
Design Temperature (Nom)	25 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Cap-Base Information	4 Pins
Approval and Application	
Energy Efficiency Label (EEL)	A
Mercury (Hg) Content (Nom)	4 mg
Energy Consumption kWh/1000 h	42 kWh


Datasheet, 2020, March 19 data subject to change

# PL-Q 4 Pin

Product Data	
Full product code	871150027173025
Order product name	PL-Q 38W/835/4P 1CT/10BOX
EAN/UPC - Product	8711500271730
Order code	927939483540
Numerator - Quantity Per Pack	1

Numerator - Packs per outer box	10			
Material Nr. (12NC)	927939483540			
Net Weight (Piece)	129.000 g			
ILCOS Code	FSS-38/35/1B-E-GR10q			

## Dimensional drawing




PL-Q 38W/835/4P

Product	U (max)	D (max)	D1 (max)	C (max)	C1 (max)	F (max)	E (max)
PL-Q 38W/	46.5 mm	18.9 mm	33 mm	203 mm	76 mm	41 mm	200 mm
835/4P 1CT/							
10BOX							

#### Photometric data

(1)

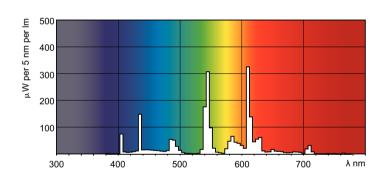


LDPB\_PLQ4P\_835-Spectral power distribution B/W

LDPO\_PLQ4P\_835-Spectral power distribution Colour

#### Lifetime






LDLM\_PLQ4P\_0001-Lumen maintenance diagram

LDLE\_PLQ4P\_0002-Life expectancy diagram

## PL-Q 4 Pin

## Lifetime

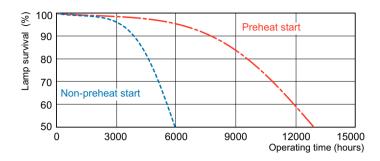

LDLE\_PLQ4P\_0001-Life expectancy diagram

