





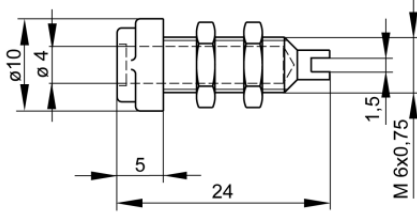


Sockets

BUG 10



Product	BUG 10
description	Socket with oval insulated head, Ø 4 mm tin-plated brass socket, with M6 thread and solder connection. For Installation in equipment chassis and switch panels till 8mm wall thickness.
article-no. / *colour	9301751xx <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> 00 black</div> <div style="text-align: center;"> 01 red</div> <div style="text-align: center;"> 02 blue</div> <div style="text-align: center;"> 03 yellow</div> <div style="text-align: center;"> 04 green</div> <div style="text-align: center;"> 07 white</div> </div> <div style="text-align: right; margin-top: 5px;">Sn</div>
drawing	
technical data	
connection	M6 thread, solder connection
rated voltage ⁽¹⁾	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O ⁽³⁾
rated current ⁽¹⁾ (consider derating curve)	16 A
material socket	brass, tin plated
housing material	PA
temperature range acc. To IEC61010 ⁽²⁾	-25 °C to +85 °C
inflammability class acc. to UL 94 (only valid for basic material of housing)	V-2
standard	IEC 61010

4 mm system

⁽¹⁾ for normal environmental conditions -5°C to +40°C

⁽²⁾ contact the manufacturer for applications at deviating temperature ranges

⁽³⁾ Other circuits that are not directly connected to mains
stand: 05.07.2018