

Type: Female connector straight

Termination: Press-fit, solder

Number of contacts: 40, 64

Pitch: 2.54 mm


Operational current: 1.9 A

Packaging: Tray

Standard: PC/104



Technical Specifications on page 166

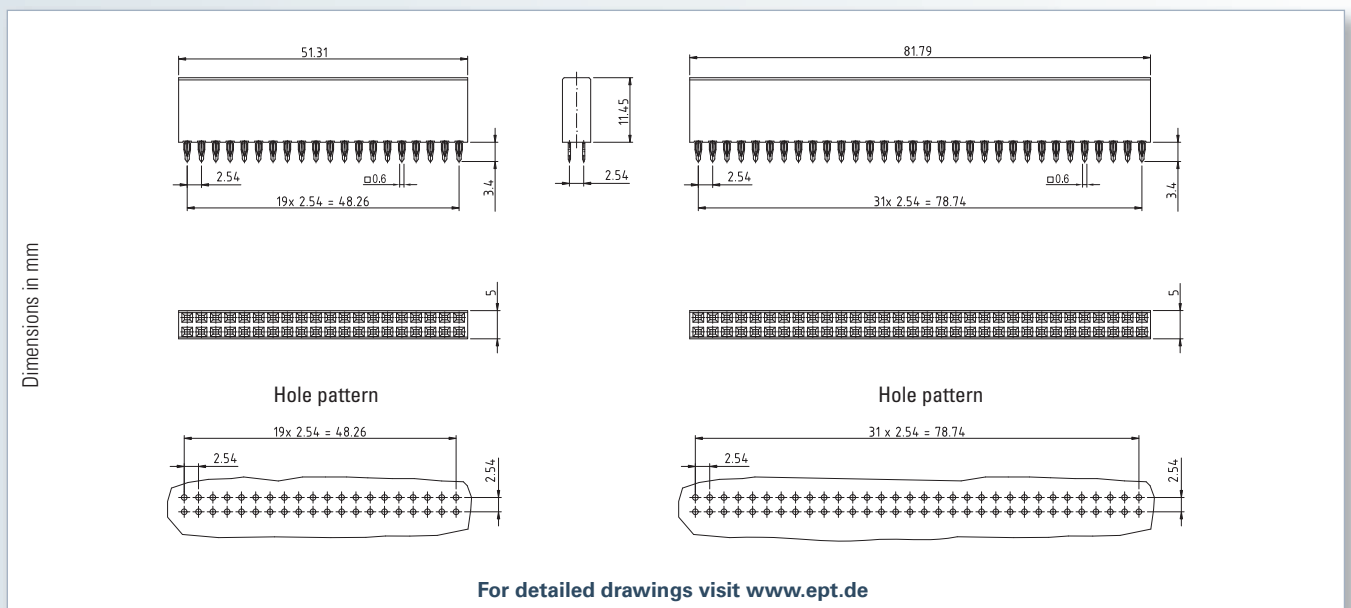

Accessories

- Processing tools p. 306

Note


At a contact length of 12.2 mm a guiding block is scope of delivery.

Mating connector / Application:

- PC/104 Female connector (p. 168)
- VarPol Straight pin header (p. 154)




Press-fit 

No. of contacts	Performance level	Termination length L 	
		3.4 mm	12.2 mm
		Part number	
40	II	962-60206-03	962-60206-12
40	III	962-60202-03	962-60202-12
64	II	962-60326-03	962-60326-12
64	III	962-60322-03	962-60322-12



Solder 

No. of contacts	Performance level	Termination length L 
		3.4 mm
		Part number
40	II	962-40206-03
40	III	962-40202-03
64	II	962-40326-03
64	III	962-40322-03