
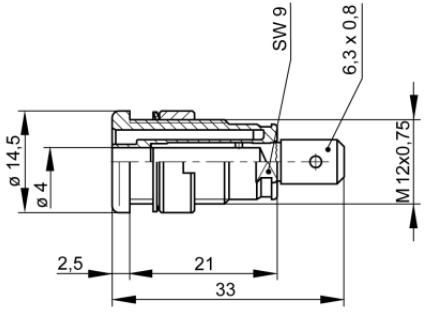


Sockets

SEB 2620 F6,3



| | |
|---|---|
| Product | SEB 2620 F6,3 |
| description | Safety built-in socket, 4 mm diameter, contact-protected, with 6.3 x 0.8 tab connector complying with DIN 46 244, gold-plated brass. For installation into switchpanels and equipment chassis with wall thicknesses up to 6 mm. Installation hole: 12.2 mm diameter, Tightening torque: 50 Ncm, Accessory: assembly tool MW SEB |
| operating instruction | BA451 |
| article-no. / *colour | 9723561xx  Au |
| drawing |  |
| technical data | |
| connection | flat connector 6.3 x 0.8 mm |
| rated voltage ⁽¹⁾ | AC/DC 1000 V |
| measurement cat. acc. to IEC 61010 | CAT III |
| rated current ⁽¹⁾ (consider derating curve) | 32 A |
| material socket | brass, gold plated |
| housing material | PA |

4 mm safety system

| | |
|--|------------------|
| temperature range acc. To IEC61010 ⁽²⁾ | -40 °C to +80 °C |
| flammability class acc. to UL 94 (only valid for basic material of housing) | V-2 |
| standard | IEC 61010 |

⁽¹⁾ for normal environmental conditions -5°C to +40°C

⁽²⁾ contact the manufacturer for applications at deviating temperature ranges

stand: 13.05.2016