





Test probes

PRUEF 1610 FT Au

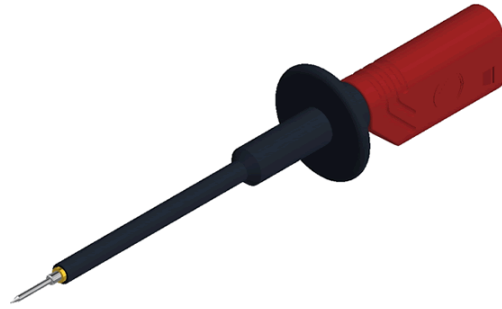

| Product | PRUEF 1610 FT Au |
|--|--|
| description | Safety test probe with shatter-proof insulated sleeve, spring-loaded and slender stainless steel tip. 2 mm diameter gold-plated brass socket connection, stackable with 2 mm safety measuring lead MVL S WS. Oxide layers can be penetrated by this test probe. |
| article-no. / *colour | 9750187xx <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  00 black </div> <div style="text-align: center;">  01 red </div> </div> <div style="text-align: right; border: 1px solid black; padding: 2px; width: 30px; margin-left: auto;">Au</div> |
| drawing |  |
| technical data | |
| connection | unsprung socket 2 mm |
| rated voltage ⁽¹⁾ | AC/DC 1000 V |
| measurement cat. acc. to IEC 61010 | CAT II |
| rated current ⁽¹⁾ (consider derating curve) | 10 A |
| material socket | tip: stainless steel-BR-socket: brass |
| housing material | PA |
| temperature range acc. To IEC61010 ⁽²⁾ | -25 °C to +70 °C |
| inflammability class acc. to UL 94 (only valid for basic material of housing) | V-2 |
| standard | IEC 61010 |

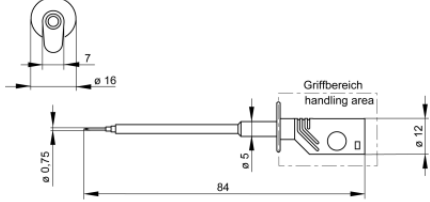2 mm safety system

⁽¹⁾ for normal environmental conditions -5°C to +40°C

⁽²⁾ contact the manufacturer for applications at deviating temperature ranges

stand: 04.07.2018