

PRELIMINARY SPEC

Part Number: AA3528QR51C/D

Cyan



ATTENTION
OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
DISCHARGE
SENSITIVE
DEVICES

Features

- Single color.
- Suitable for all SMT assembly and solder process.
- Available on tape and reel.
- Ideal for backlighting.
- Package : 1500pcs / reel.
- Moisture sensitivity level : level 4.
- RoHS compliant.

Description





The source color devices are made with InGaN Light Emitting Diode.

Static electricity and surge damage the LEDs.

It is recommended to use a wrist band or anti-electrostatic glove when handling the LEDs.

All devices, equipment and machinery must be electrically grounded.

Package Dimensions

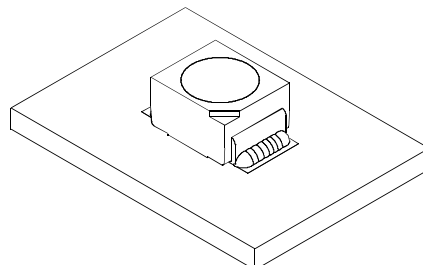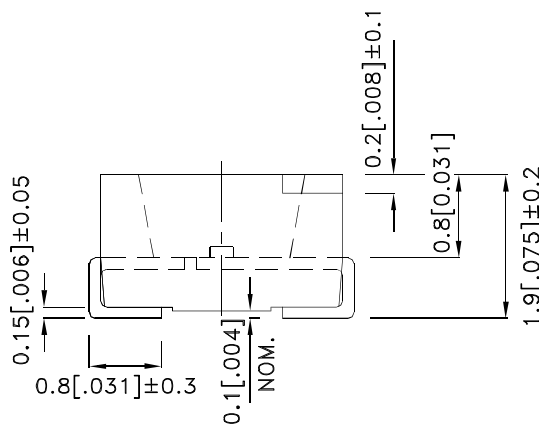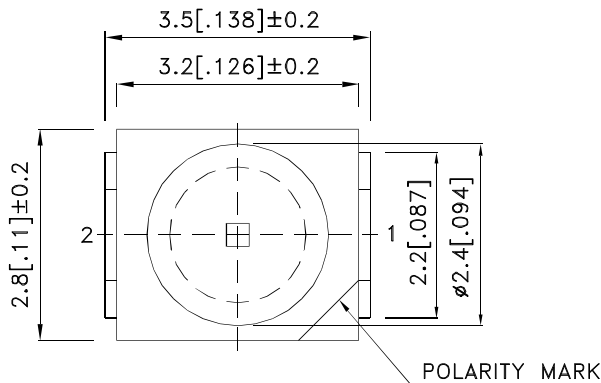

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is ±0.25(0.01") unless otherwise noted.
3. Specifications are subject to change without notice.
4. The device has a single mounting surface. The device must be mounted according to the specifications.



Selection Guide

Part No.	Dice	Lens Type	Iv (mcd) [2] @ 20mA		Viewing Angle [1]
			Min.	Typ.	2θ1/2
AA3528QR51C/D	Cyan (InGaN)	WATER CLEAR	280	420	120°

Notes:

- θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 of the optical peak value.
- Luminous intensity/ luminous Flux: +/-15%.

Electrical / Optical Characteristics at TA=25°C

Symbol	Parameter	Device	Typ.	Max.	Units	Test Conditions
V _F [1]	Forward Voltage	Cyan	3.3	4.0	V	I _F =20mA
I _R	Reverse Current	Cyan		10	μA	V _R = 5V
X[2]	Chromaticity Coordinates	Cyan	0.19			I _F =20mA
Y[2]			0.41			I _F =20mA
C	Capacitance	Cyan	100		pF	V _F =0V;f=1MHz

Notes:

- Forward Voltage: +/-0.1V.
- Measurement tolerance of the chromaticity coordinates is ±0.1.

Absolute Maximum Ratings at TA=25°C






Parameter	Cyan	Units
Power dissipation	120	mW
DC Forward Current	30	mA
Peak Forward Current [1]	150	mA
Reverse Voltage	5	V
Operating Temperature	-40°C To +85°C	
Storage Temperature	-40°C To +85°C	

Note:


- 1/10 Duty Cycle, 0.1ms Pulse Width.

Cyan

AA3528QR51C/D

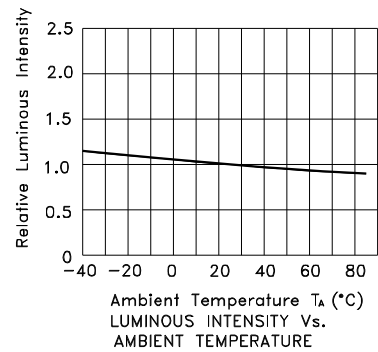

AA3528QR51C/D

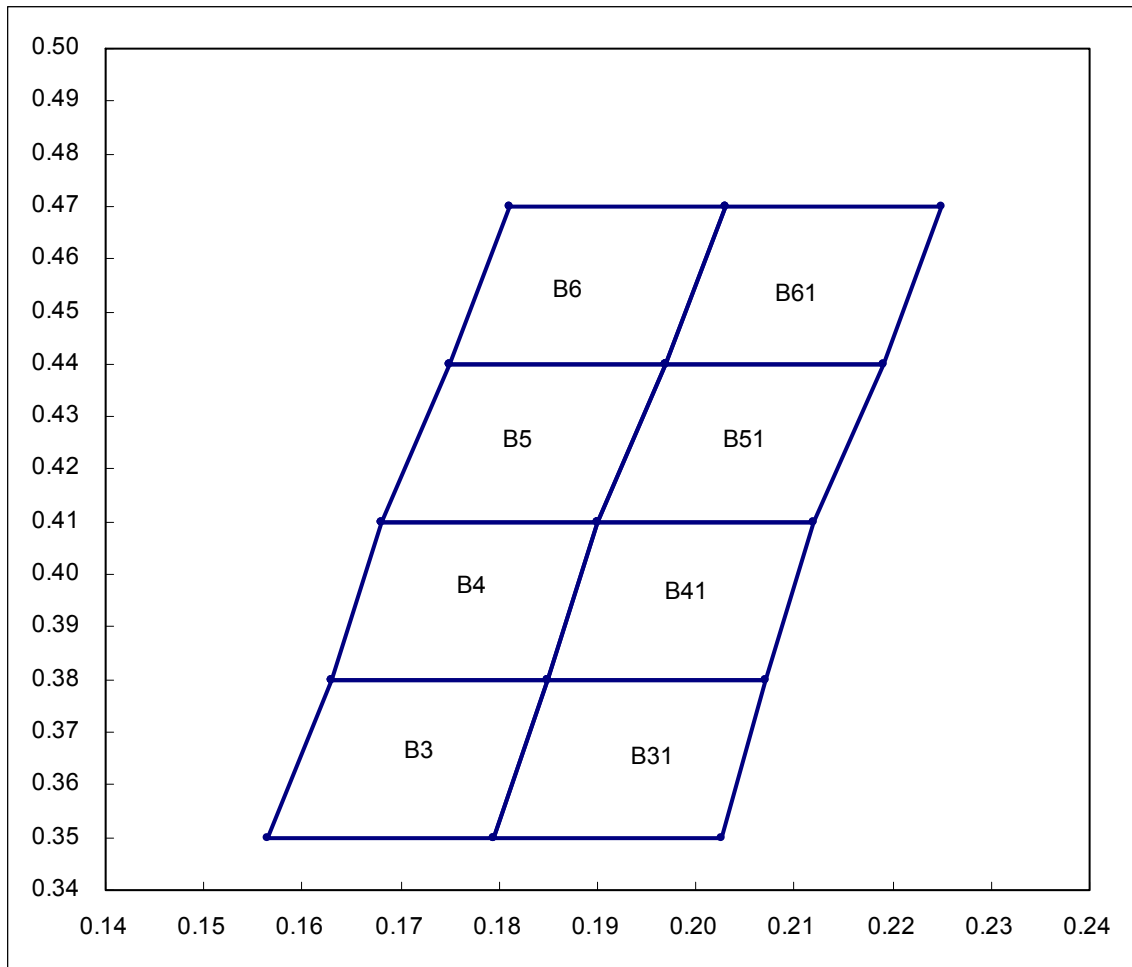

B3				
X	0.1565	0.1795	0.1850	0.1630
Y	0.3500	0.3500	0.3800	0.3800

B31				
X	0.1795	0.1850	0.2070	0.2025
Y	0.3500	0.3800	0.3800	0.3500

B4				
X	0.1850	0.1630	0.1680	0.1900
Y	0.3800	0.3800	0.4100	0.4100

B41				
X	0.1850	0.2070	0.2120	0.1900
Y	0.3800	0.3800	0.4100	0.4100

B5				
X	0.1680	0.1900	0.1970	0.1750
Y	0.4100	0.4100	0.4400	0.4400

B51				
X	0.2120	0.1900	0.2190	0.1970
Y	0.4100	0.4100 </td <td>0.4400</td> <td>0.4400</td>	0.4400	0.4400


B6				
X	0.1970	0.1750	0.1810	0.2030
Y	0.4400	0.4400	0.4700	0.4700

B61				
X	0.2190	0.1970	0.2030	0.2250
Y	0.4400	0.4400	0.4700	0.4700

AA3528QR51C/D

Reflow soldering is recommended and the soldering profile is shown below.
Other soldering methods are not recommended as they might cause damage to the product.


Reflow Soldering Profile For Lead-free SMT Process.

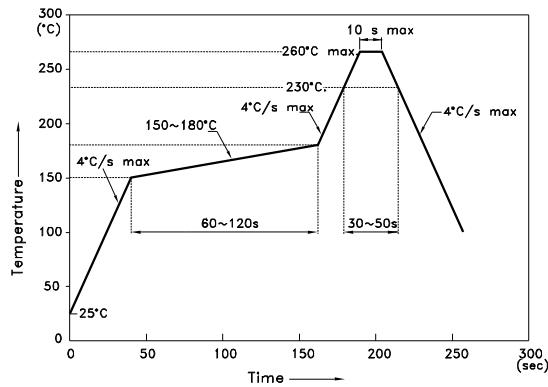


NOTES:

1. We recommend the reflow temperature 245°C(+/-5°C). The maximum soldering temperature should be limited to 260°C.
2. Don't cause stress to the epoxy resin while it is exposed to high temperature.
3. Number of reflow process shall be 2 times or less.

Recommended Soldering Pattern (Units : mm; Tolerance: ± 0.1)

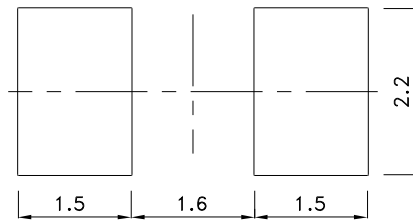



Tape Dimensions (Units : mm)

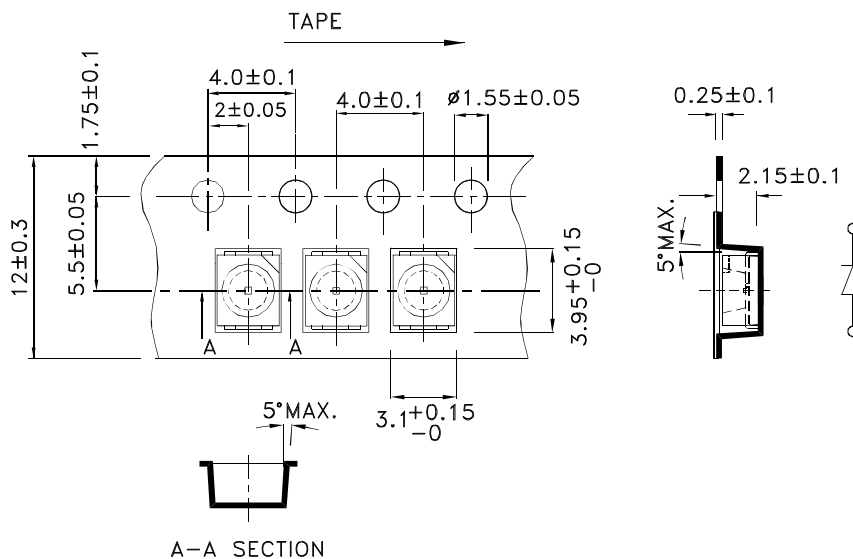


Kingbright

PACKING & LABEL SPECIFICATIONS

AA3528QR51C/D

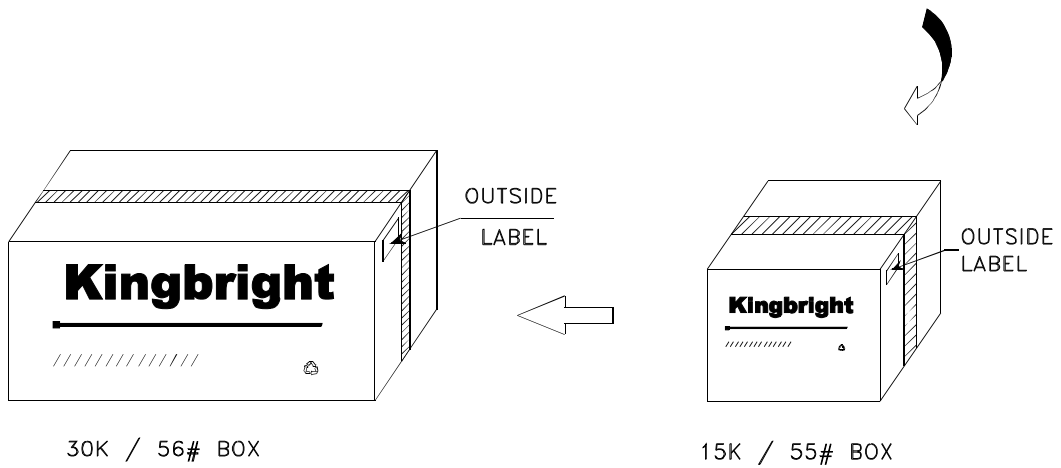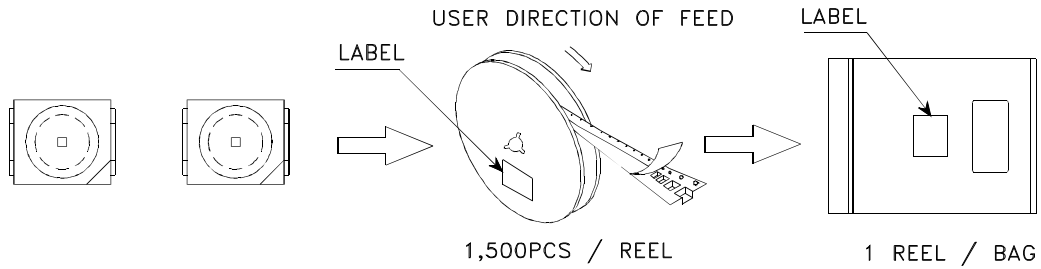

<h1>Kingbright</h1>	
P/NO: AA3528xxx	
QTY: 1,500 pcs	Q.C. Q C XX XX XXXX PASSED
S/N: XXXX	
CODE: XXX	
LOT NO:	
 XXXXXXXXXXXXXXXXXXXXXXXXXXXX	
RoHS Compliant	