

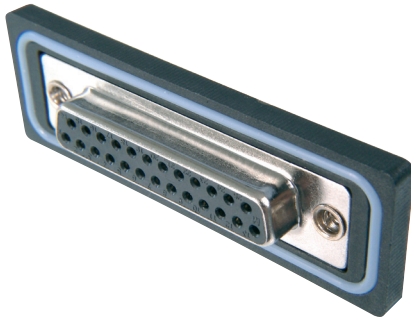


- D-Sub cover / Centronics
- Multiflex - DIN 41651
- Modular
- USB IEEE 1394
- Switches
- Powerinlets Poweroutlets
- DIN 41612 DIN 41617 Hard Metric
- MiniDIN
- Pin header Female header Sockets / Jumper
- Terminal Blocks
- Memory Card connectors
- FFC / FPC
- Micro - Miniature

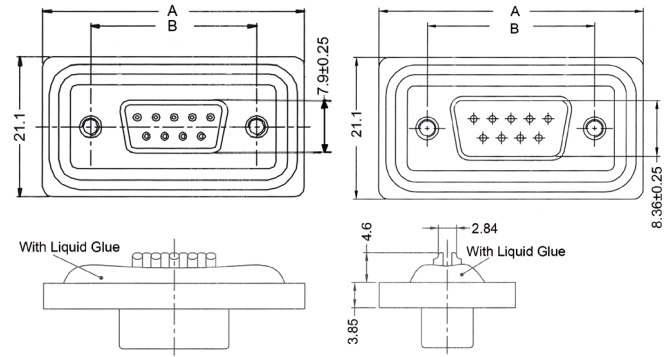

Isolierkörpermaterial PBT, UL94V-0	Insulator material PBT, UL94V-0
Kontaktmaterial Messing	Contact material Brass
Kontaktfläche Ni, Au	Plating Ni, Au
Kontaktwiderstand 20mΩ max	Contact resistance 20mΩ max
Isolationswiderstand 500MΩ min	Insulation resistance 500MΩ min
Strombelastbarkeit 5A	Current rating 5A
Betriebstemperatur -40°C - +105°C	Operating temperature -40°C - +105°C
Betriebsspannung 250V AC	Operating voltage 250V AC
Prüfspannung 1000V AC	Test voltage 1000V AC
Verpackung Blisterverpackung	Packing Tray packing

Dimensions				
No. of contacts	A	B	C	D
09	39.4	25.0	28.20	20.0
15	47.8	33.3	36.50	28.0
25	64.5	47.1	51.00	41.5



Bestellcode / Ordercode

Kontaktart
 F - Buchse
 S - Stecker

Contact style
 F - Female
 S - Male

Polzahl
 09 / 15 / 25

No. of contacts
 09 / 15 / 25

WP - IP67

WP - IP67

A - D x xx LL - WP

Bitte „x“ durch die geeignete Option ersetzen
 Please replace „x“ with appropriate option