

Blackburn®



Dual-Rated
T&B Catalog Number:

ADR35-44
 78378661026

UPC Number:

Active


Status:

Description:

Type ADR-ALCUL Four-Conductor, Four-Hole Mount for Conductor Range Max 350 kcmil, Min 6 Str.

Features

Easy Installation - no special tools required.

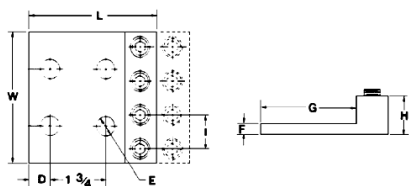

General

Style	ALCUL Four-Conductor, Four-Hole Mount
Material	Aluminum
Plating	Tin-Plated
Conductor Range (AL or CU) Maximum	350 kcmil
Conductor Range (AL or CU) Minimum	6 Str.

Dimension Information

Length (inches)	4 1/4
Width (inches)	4 23/32
Height (inches)	1 3/8
D (inches)	5/8
E (inches)	1/2
F (inches)	5/16
G (inches)	3
I (inches)	1 7/32

Packaging

T&B Order Multiple	1
T&B Inner Pack	1
Package in Units	3
T&B Sold in UOM	Each
T&B Weight Per UOM	106.67 lbs. per 100

Notes

NEMA spacing 1 3/4 inch centers.
 Connectors accommodating conductors 600 kcmil and larger have double rows of set screws (D suffix).
 UL 486B tested, AL9CU rated

Certifications

RoHS Compliance	No
-----------------	----

Certifications



File Nbr:
 E9809

For further technical assistance, please contact us...

8155 T&B Blvd.
Memphis, TN 38125
www.tnb.com

MS 3B-50
8155 T&B Blvd.
Memphis, TN 38125

Monday-Friday
Phone: (888) 862-3289
Fax: (901) 252-1321
Email: techsupport@tnb.com