

# AF116 ... AF146 3-pole contactors

## 75 to 100 hp at 480 V AC

### AC / DC operated with 1 N.O. + 1 N.C. auxiliary contacts



AF146-30-11



AF146-30-11B

#### Description

AF116 ... AF140 contactors are mainly used for controlling 3-phase motors and power circuits up to 690 V AC, AF146 up to 1000 V AC. These contactors are of the block type design with 3 main poles.

- Control circuit: AC or DC operated with electronic coil interface accepting a wide control voltage range (e.g. 100...250 V AC and DC), only 4 control voltage ranges covering 24...500 V 50/60 Hz and 20...500 V DC
- can manage large control voltage variations
- reduced panel energy consumption
- very distinct closing and opening
- can withstand short voltage dips and voltage sags (SEMI F47 conditions of use on request).
- built-in surge suppression
- add-on auxiliary contact blocks for side mounting and a wide range of accessories.

#### Ordering details

IEC		UL / CSA		Rated control circuit voltage Uc min. ... Uc max.	Auxiliary contacts fitted	Catalog number	Global reference code	Weight Pkg (1 pce) kg
Rated operational power	operational current $\theta \leq 40^\circ\text{C}$	3-phase motor rating 480 V	General use rating 600 V AC					
400 V	AC-3	AC-1		V 50/60 Hz; V DC				
kW	A	hp	A					


#### For connection with built-in cable clamps

55	160	75	160	24...60	20...60	1	1	AF116-30-11-11	1SFL427001R1111	1,750
				48...130	48...130	1	1	AF116-30-11-12	1SFL427001R1211	1,750
				100...250	100...250	1	1	AF116-30-11-13	1SFL427001R1311	1,750
				250...500	250...500	1	1	AF116-30-11-14	1SFL427001R1411	1,750
75	200	100	200	24...60	20...60	1	1	AF140-30-11-11	1SFL447001R1111	1,750
				48...130	48...130	1	1	AF140-30-11-12	1SFL447001R1211	1,750
				100...250	100...250	1	1	AF140-30-11-13	1SFL447001R1311	1,750
				250...500	250...500	1	1	AF140-30-11-14	1SFL447001R1411	1,750
75	225	100	200	24...60	20...60	1	1	AF146-30-11-11	1SFL467001R1111	1,750
				48...130	48...130	1	1	AF146-30-11-12	1SFL467001R1211	1,750
				100...250	100...250	1	1	AF146-30-11-13	1SFL467001R1311	1,750
				250...500	250...500	1	1	AF146-30-11-14	1SFL467001R1411	1,750

#### With bar connections

55	160	75	160	24...60	20...60	1	1	AF116-30-11B-11	1SFL427002R1111	1,500
				48...130	48...130	1	1	AF116-30-11B-12	1SFL427002R1211	1,500
				100...250	100...250	1	1	AF116-30-11B-13	1SFL427002R1311	1,500
				250...500	250...500	1	1	AF116-30-11B-14	1SFL427002R1411	1,500
75	200	100	200	24...60	20...60	1	1	AF140-30-11B-11	1SFL447002R1111	1,500
				48...130	48...130	1	1	AF140-30-11B-12	1SFL447002R1211	1,500
				100...250	100...250	1	1	AF140-30-11B-13	1SFL447002R1311	1,500
				250...500	250...500	1	1	AF140-30-11B-14	1SFL447002R1411	1,500
75	225	100	200	24...60	20...60	1	1	AF146-30-11B-11	1SFL467002R1111	1,500
				48...130	48...130	1	1	AF146-30-11B-12	1SFL467002R1211	1,500
				100...250	100...250	1	1	AF146-30-11B-13	1SFL467002R1311	1,500
				250...500	250...500	1	1	AF146-30-11B-14	1SFL467002R1411	1,500

#### Main dimensions mm, inches

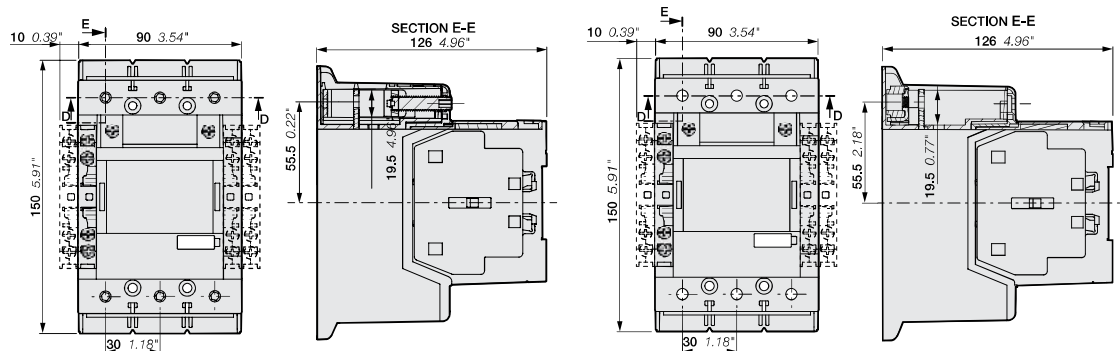

AF116, AF140, AF146-30-11

AF116, AF140, AF146-30-11B