
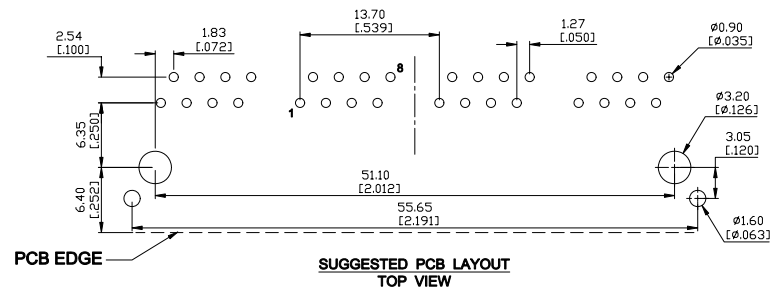


Electrical Characteristics :
Insulation Resistance : 500MΩ Min.
Contact Resistance : 50mΩ Max.
Withstand Voltage : 1000 VAC 1 minute.
Current Rating : 1.5A

Material:
Housing: Thermoplastic UL 94V-0
Contact : Selective Gold Plating
Terminal: 0.35mm Thickness Phosphor Bronze
Plated With Gold And Tin In Solder Area.

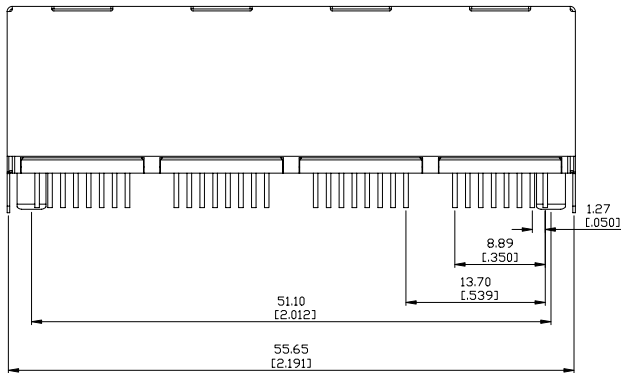

Ordering Information

AJT52D	8	8	4	X
Type	Positions	Contacts	Ports	Plating
				1 = 6u"
				3 = 30u"

Tolerance
 unless otherwise specified
 mm
 .0 ± .25
 .00 ± .15
 .000 ± .075

	P/N: AJT52D884X
	Desc.: Top entry, shielded, thru hole modular jack
Date: 3-25-10	Drawn By: Donna Mears
Dimensions in mm	Verified By: Mike Balekdjian