
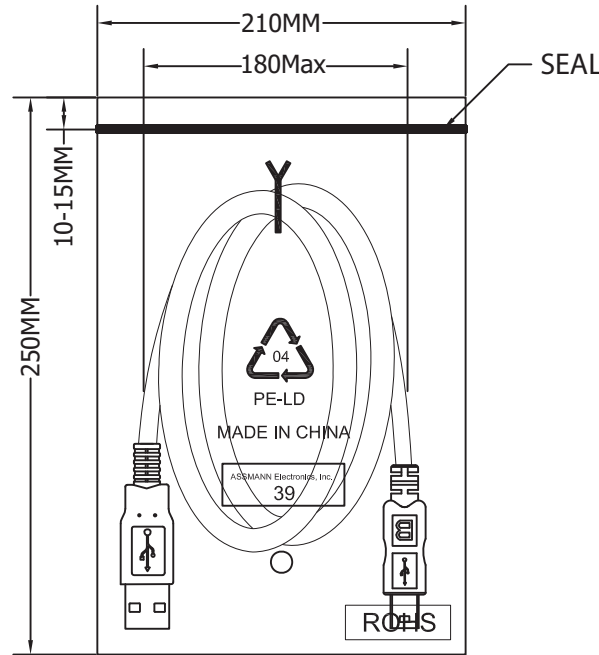


P1

P2

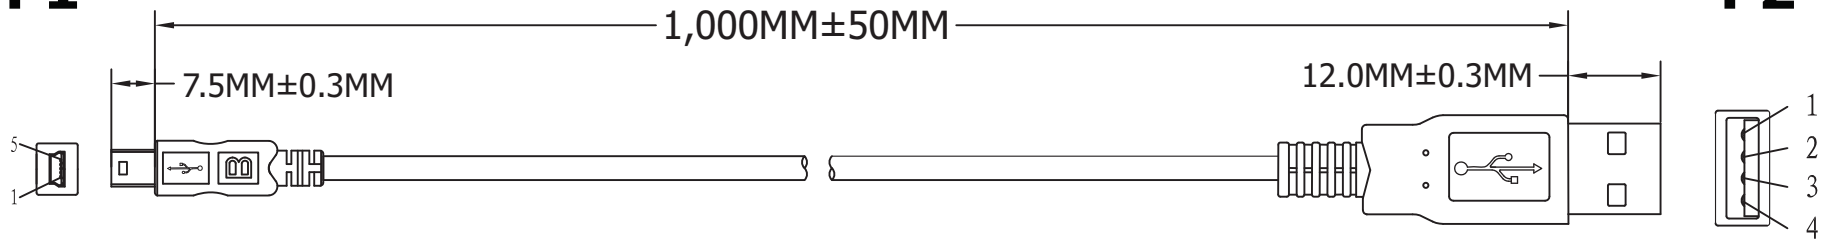

1PCS / PE BAG

Material:

- Cable: Black USB2.0 UL2725 28#/1P+28#/2C+AEB
- OD: 3.8MM
- P1 Connector: USB Mini 5P Male
- Pin: G/F
- 3PCS Type
- Insulator Color: Black
- Shell: Nickel
- Outer Jacket: Black PVC-40P
- P2 Connector: USB A Male
- Pin: G/F
- 4PCS Type
- Insulator Color: White
- Shell: Nickel
- Outer Jacket: Black PVC-40

Electrical:

- 100% Open, short & mis wire test
- Contact Resistance: 5Ω Max.
- Insulation Resistance: 10MΩ Min.
- Dielectric Test: 300V DC

| PIN ASSIGNMENT | | | |
|----------------|---------------------------|----|---|
| P1 | RED | P2 | 1 |
| 1 | WHITE | 2 | 2 |
| 2 | GREEN | 3 | 3 |
| 3 | BLACK | 4 | 4 |
| 5 | SHELL DRAIN + BRAID SHELL | | |



| | | | | | | | |
|--------------|-------|------|------|-----------------------|--|-------------|-------|
| Scale | 1:1 | | | | | Name | |
| TOLERANCE | | | | | | Item No. | |
| X.X | ±0.40 | | | Drawn 08.29.11 | | Chappell | |
| X.XX | ±0.25 | | | Approved | | | |
| X.XXX | ±0.15 | | | | | | |
| Angle | ±3° | | | | | | |
| | | | | ASSMANN components | | | |
| Modification | | Date | Name | | | Drawing No. | |
| | | | | | | Replace | Sheet |

| | | | |
|---|--|------------------------|--|
| Name | | Item No. | |
| Chappell | | AK672M/2-1-GR-R | |
| Title USB 2.0 Mini Cable, Mini 5P Male <=> A Male, 30µ" Gold, Grey, 1.0 Meter | | | |
| Drawing No. | | | |
| Replace | | | |
| Sheet | | | |