3.2x1.6mm SMD CHIP LED LAMP

Part Number: AP3216MGC Mega Green


Features

- 3.2mmx1.6mm SMT LED, 1.1mm thickness.
- Low power consumption.
- Wide viewing angle.
- Ideal for backlight and indicator.
- Various colors and lens types available.
- Package : 2000pcs / reel.
- Moisture sensitivity level : level 3.
- RoHS compliant.

Description

The Mega Green source color devices are made with AlGaInP on GaAs substrate Light Emitting Diode.

Package Dimensions

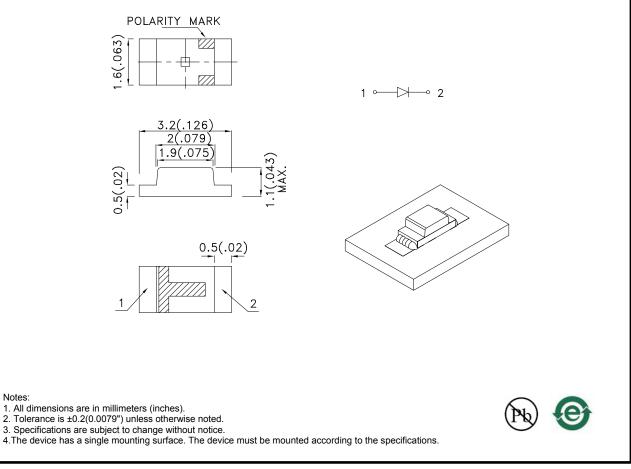

SPEC NO: DSAA8436 APPROVED: WYNEC

Notes:

REV NO: V.9 **CHECKED:** Allen Liu DATE: MAY/19/2009 DRAWN: D.M.Su

PAGE: 1 OF 5 ERP: 1203000359

Selection Guide lv (mcd) [2] Viewing @ 20mA Angle [1] Part No. Dice Lens Type 201/2 Min. Тур. AP3216MGC Mega Green (AlGaInP) WATER CLEAR 18 70 120°

Notes:

θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.
Luminous intensity/ luminous Flux: +/-15%.

Electrical / Optical Characteristics at TA=25°C

Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	Mega Green	574		nm	I⊧=20mA
λD [1]	Dominant Wavelength	Mega Green	570		nm	I⊧=20mA
Δλ1/2	Spectral Line Half-width	Mega Green	26		nm	I⊧=20mA
С	Capacitance	Mega Green	20		pF	VF=0V;f=1MHz
VF [2]	Forward Voltage	Mega Green	2.1	2.5	V	I⊧=20mA
lr	Reverse Current	Mega Green		10	uA	VR=5V


Notes: 1.Wavelength: +/-1nm. 2. Forward Voltage: +/-0.1V.

Absolute Maximum Ratings at TA=25°C

Parameter	Mega Green	Units		
Power dissipation	75	mW		
DC Forward Current	30	mA		
Peak Forward Current [1]	150	mA		
Reverse Voltage	5	V		
Operating Temperature	-40°C To +85°C			
Storage Temperature	-40°C To +85°C			

Note:

1. 1/10 Duty Cycle, 0.1ms Pulse Width.

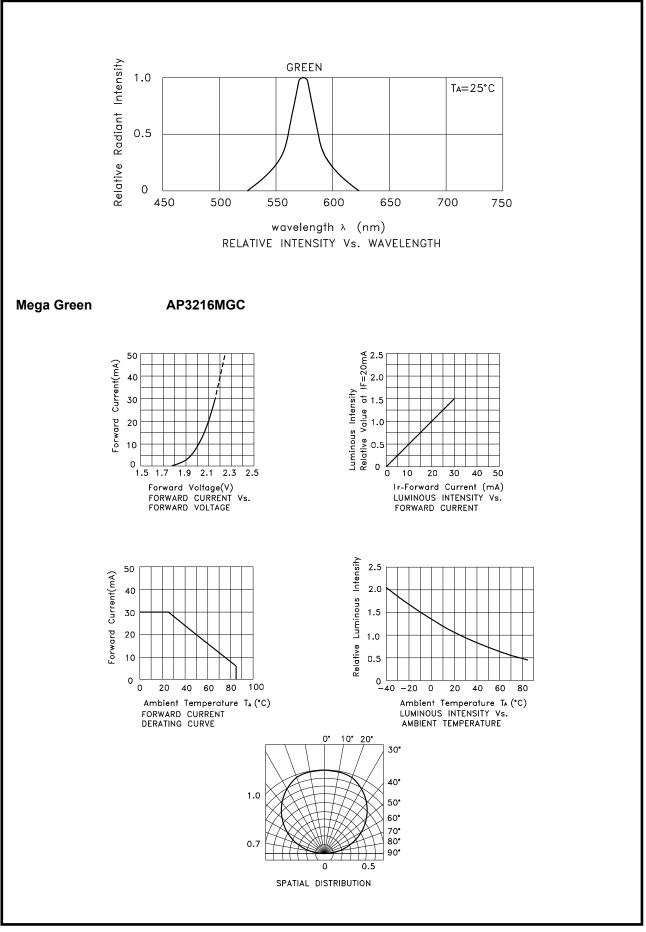


AP3216MGC

APPROVED: WYNEC

CHECKED: Allen Liu

Reflow soldering is recommended and the soldering profile is shown below. Other soldering methods are not recommended as they might cause damage to the product.

Reflow Soldering Profile For Lead-free SMT Process.

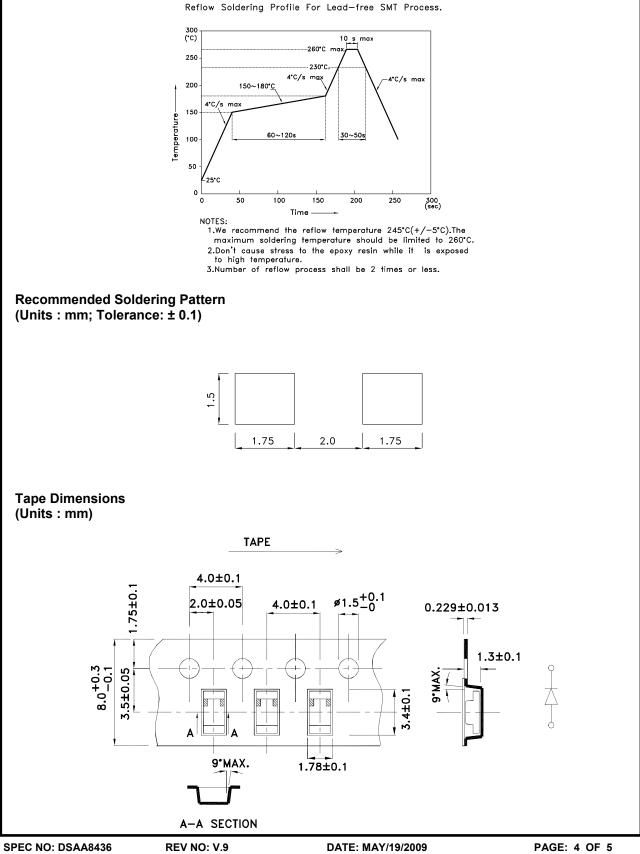

DRAWN: D.M.Su

ERP: 1203000359

