

## **ARCA ARK864CHFSSLF**



Order symbol: Product nbr: Description: Remarks:

ARK864CHFSSLF 8561409

EAN: Finland:

PC Enclosure Hinged opaque flat cover w/S.S. Lockable latch. Base includes 1/2 and 3/4 inch knock-outs and plastic mounting flanges.

El. number:

6418074095855

Including: Hinged cover. Base with 10-32 brass inserts, latched flat cover with formed in place PUR gasket, stainless hinge pin. Base with 1/2 and 3/4 inch knock-outs. Quick release latches. Enclosure mounting foot kit. Accessory 10-32 screws for panel mounting.


Sample photo

n: 203 152 101 ALBP86 Aluminum Back Part   h: 8.0 6.0 4.0 ADFP86 Dead Front Panel w   ASP86 Aluminum Swing Part ASP86 Aluminum Swing Part   terials: Polycarbonate ASPK86 Swing Panel Kit inc   se colour: RAL 7035 -light grey AMFL6 6" Mounting Flange   ver screws material: Stainless steel AMFL6 6" Mounting Flange   ver colour: RAL 7035 -light grey Ingress Protection (EN 60529): IP66/IP67   sket material: Polyurethane Impact Resistance (EN 62262): IK09   Electrical insulation: Totally insulated Halogen free (DIN//VDE 0472, Part 815): 1   mperatures: -40 140 °C UV resistance: UL 508   mperature °F (short term): -40 284 °F Glow Wire Test (IEC 695-2-1) °C: 960   nperature °F (continuous): -40 284 °F NEMA Class: NEMA 4, 4X, 6, 6P, 12, 13   Certificates:						
h: 200 102 101 ADFP86 Dead Front Panel w/   h: 8.0 6.0 4.0 ADFP86 Dead Front Panel w/   ASP86 Aluminum Swing Panel ASP86 Aluminum Swing Panel Kit incl.   terials: Polycarbonate ASPK86 Swing Panel Kit w/o   se colour: RAL 7035 -light grey AMFL6 6" Mounting Flange S   ver screws material: Stainless steel Rating:   ver colour: RAL 7035 -light grey Ingress Protection (EN 60529): IP66/IP67   sket material: Polyurethane Impact Resistance (EN 60529): IP66/IP67   mperatures: mperature °C (short term): -40 140 °C UV resistance: UL 508   mperature °C (continuous): -40 284 °F Glow Wire Test (IEC 695-2-1) °C: 960   mperature °F (short term): -40 284 °F NEMA Class: NEMA 4, 4X, 6, 6P, 12, 13   mperature °F (continuous): -40 175 °F Certificates:	Dimensions:	Length	Width	Height	Accessories:	
n: 8.0 6.0 4.0   ASP86 Aluminum Swing Panel   terials: Polycarbonate ASPK86 Swing Panel Kit incl. P   terial: Polycarbonate ASPK86 Swing Panel Kit incl. P   se colour: RAL 7035 -light grey AMFL6 6" Mounting Flange Set   ver screws material: Stainless steel Rating:   ver colour: RAL 7035 -light grey Ingress Protection (EN 60529): IP66/IP67   sket material: Polyurethane Impact Resistance (EN 62262): IK09   electrical insulation: Totally insulated Halogen free (DIN/VDE 0472, Part 815): 1   mperatures: -40 140 °C UV resistance: UL 508   mperature °C (short term): -40 284 °F Glow Wire Test (IEC 695-2-1) °C: 960   nperature °F (short term): -40 175 °F Certificates:	mm:	203	152	101	ALBP86	Aluminum Back Panel
terials: Polycarbonate ASP86 Aluminum Swing Panel   terial: Polycarbonate ASPK86 Swing Panel Kit incl. Pa   se colour: RAL 7035 -light grey AMFL6 6" Mounting Flange Set   ver colour: RAL 7035 -light grey AMFL6 6" Mounting Flange Set   ver colour: RAL 7035 -light grey Ingress Protection (EN 60529): IP66/IP67   sket material: Polyurethane Ingress Protection (EN 60529): IK09   electrical insulation: Totally insulated Halogen free (DIN/VDE 0472, Part 815): 1   mperature °C (short term): -40 140 °C UV resistance: UL 508   mperature °F (short term): -40 284 °F Glow Wire Test (IEC 695-2-1) °C: 960   nperature °F (continuous): -40 175 °F Certificates:	inch:	8.0	6.0	4 0	ADFP86	Dead Front Panel w/ sc
terial:PolycarbonateASPHK8Swing Panel Kit w/o Panse colour:RAL 7035 -light greyAMFL66" Mounting Flange Setver screws material:Stainless steelRating:ver colour:RAL 7035 -light greyIngress Protection (EN 60529): IP66/IP67sket material:PolyurethaneImpact Resistance (EN 62262): IK09mperatures:-40 140 °CUV resistance: UL 508mperature °C (short term):-40 284 °FUV resistance: UL 508mperature °F (short term):-40 284 °FGlow Wire Test (IEC 695-2-1) °C: 960mperature °F (continuous):-40 175 °FCertificates:		0.0	0.0	1.0	ASP86	Aluminum Swing Panel
se colour: RAL 7035 -light grey   ver screws material: Stainless steel   ver colour: RAL 7035 -light grey   sket material: Polyurethane   mperatures: Polyurethane   mperature °C (short term): -40 140 °C   mperature °C (continuous): -40 284 °F   mperature °F (short term): -40 175 °F   mperature °F (continuous): -40 175 °F	laterials:				ASPK86	Swing Panel Kit incl. Par
RAL 7035 -light grey Rating:   ver screws material: Stainless steel   ver colour: RAL 7035 -light grey   sket material: Polyurethane   mperatures: Polyurethane   mperature °C (short term): -40 140 °C   mperature °C (continuous): -40 80 °C   mperature °F (short term): -40 284 °F   mperature °F (continuous): -40 175 °F   material: -40 175 °F	laterial:	Polycarbor	nate		ASPHK8	Swing Panel Kit w/o Pan
ver colour: RAL 7035 -light grey Ingress Protection (EN 60529): IP66/IP67   sket material: Polyurethane Impact Resistance (EN 62262): IK09   electrical insulation: Totally insulated   halogen free (DIN/VDE 0472, Part 815): 1 UV resistance: UL 508   mperature °C (continuous): -40 80 °C Flammability Rating: UL 508   mperature °F (short term): -40 284 °F Glow Wire Test (IEC 695-2-1) °C: 960   mperature °F (continuous): -40 175 °F Certificates:	ase colour:	RAL 7035	-light grey		AMFL6	6" Mounting Flange Set
sket material: Polyurethane Impact Resistance (EN 62262): IK09   mperatures: Impact Resistance (EN 62262): IK09   mperature °C (short term): -40 140 °C   mperature °C (continuous): -40 80 °C   mperature °F (short term): -40 284 °F   mperature °F (continuous): -40 175 °F   Certificates:	over screws material:	Stainless steel			Rating:	
Imperatures: Electrical insulation: Totally insulated   Imperature °C (short term): -40 140 °C   Imperature °C (continuous): -40 80 °C   Imperature °F (short term): -40 284 °F   Imperature °F (continuous): -40 175 °F   Imperature °F (continuous): -40 175 °F	Cover colour:	RAL 7035 -light grey		Ingress Protection (EN 60529): IP66/IP67		
mperatures: Electrical insulation: Totally insulated   mperature °C (short term): -40 140 °C   mperature °C (continuous): -40 80 °C   mperature °F (short term): -40 284 °F   mperature °F (continuous): -40 175 °F   Certificates:	asket material <sup>.</sup>	Polyurethane			Impact Resistance (EN 62262): IK09	
mperature °C (short term): -40 140 °C UV resistance: UL 508   mperature °C (continuous): -40 80 °C Flammability Rating: UL 508   mperature °F (short term): -40 284 °F Glow Wire Test (IEC 695-2-1) °C: 960   mperature °F (continuous): -40 175 °F Certificates:				Electrical insulation: Totally insulated		
nperature °C (continuous): -40 80 °C Flammability Rating: UL 508   nperature °F (short term): -40 284 °F Glow Wire Test (IEC 695-2-1) °C: 960   nperature °F (continuous): -40 175 °F Certificates:	Temperatures:				Halogen free (DIN/VDE 0472, Part 815): 1	
Inperature C (continuous):   -40 284 °F   Glow Wire Test (IEC 695-2-1) °C: 960     nperature °F (continuous):   -40 175 °F   NEMA Class: NEMA 4, 4X, 6, 6P, 12, 13     Certificates:   Certificates:	Temperature °C (short term): -40 140 °C			UV resistance: UL 508		
nperature °F (short term):   -40 284 °F   Glow Wire Test (IEC 695-2-1) °C: 960     nperature °F (continuous):   -40 175 °F   NEMA Class: NEMA 4, 4X, 6, 6P, 12, 13     Certificates:   Certificates:	Temperature °C (continuous): -40 80 °C			Flammability Rating: UL 508		
nperature °F (continuous): -40 175 °F Certificates:				Glow Wire Test (IEC 695-2-1) °C: 960		
Certificates:	, , , , , , , , , , , , , , , , , , ,			NEMA Class: NEMA 4, 4X, 6, 6P, 12, 13		
	emperature *+ (continu	<b>JUUS)</b> 40 175 F		Certificates		
	Accessories:				Gost R	

ABP86

Painted Steel Back Panel

Gost R

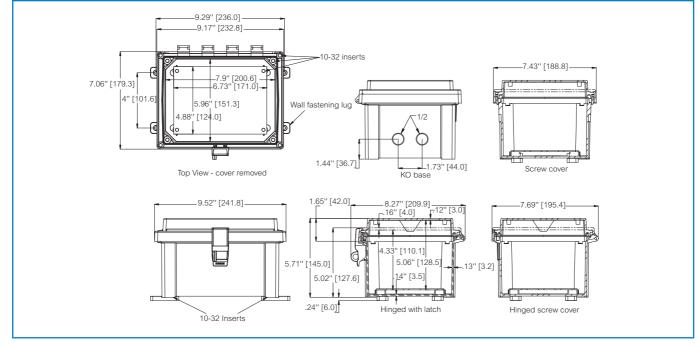

<sup>©</sup> Fibox Oy, Data subject to change without notice (printed: 23.11.2018)