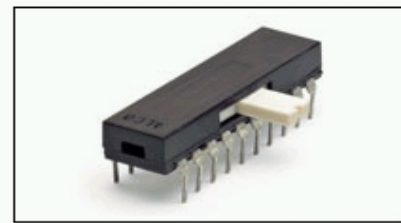


3-1825010-9 Product Details

[Share](#) | [Print](#) | [Email](#)


3-1825010-9

TE Internal Number: 3-1825010-9

Active

[View 3D PDF](#)

Slide Switches

Always EU RoHS/ELV Compliant (Statement of Compliance)

Product Highlights:

- 6 Positions
- Single Pole - Double Throw Configuration (Pole-Throw)
- Actuator Style = Top
- Actuator Color = Natural
- ASE/F Series

[View all Features](#)

Quick Links

- ▶ [Check Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

[Add to My Part List](#) | [Request Sample](#) | [Find Similar Products](#) | [Buy Product](#)

Documentation & Additional Information

Product Drawings:

- [SLIDE SWITCH ASE/ASF, AUTO-INSERTABLE, THRU-HOLE AND...](#) (PDF, English)

Catalog Pages/Data Sheets:

- [SWITCHES_CORE_PROGRAM_CATALOG](#) (PDF, English)

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files: (CAD Format & Compression Information)

- [2D Drawing \(DXF, Version C\)](#)
- [3D Model \(IGES, Version C\)](#)
- [3D Model \(STEP, Version C\)](#)

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- Actuator Style = Top
- Series = ASE/F
- Mount Angle = Vertical
- Terminal Configuration = Standard
- Grade = Telecom
- Termination Type = PC

Electrical Characteristics:

- Contact Rating = 300mA @ 115 VAC

Dimensions:

- PCB Tail Length (mm [in]) = 4.06 [0.160]

Body Features:

- Actuator Color = Natural
- Mount Style = Through-Hole
- Switch Style = Auto-insertable
- Actuator Material = Polyester

Contact Features:

- Contact Plating = Gold
- Contact Base Material = Copper Alloy

Configuration Features:

- Number of Positions = 6
- Configuration (Pole-Throw) = Single Pole - Double Throw
- Number of Actuators = Single

Industry Standards:

- RoHS/ELV Compliance = RoHS compliant, ELV compliant
- Lead Free Solder Processes = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- RoHS/ELV Compliance History = Always was RoHS compliant

Identification Marking:

- Stamped Marking = With

Other:

- Brand = TE Connectivity