

[Skip to content](#)

[Corporate Home](#) | [Electronic Components](#) | [Segments](#) | [Who We Are](#)

Worldwide



Our commitment. Your advantage.

Search

By:



[Sign In](#) | [Register \(Why Register?\)](#)

[Products](#)



- Connectors
- Electromechanical Components
- Electronic Modules
- Fiber Optics
- Filters
- Identification Labeling Products
- Passive Components
- Power Sources
- RF & Microwave Products
- Tooling Products
- Touch Screen Displays
- Tubing, Molded and Harnessing Products
- Wire, Cable and Cable Assemblies
- List all Product Types

onlinecomponents.com

- Aerospace & Defense
- Appliance
- Automotive
- Communications
- Computer & Consumer Electronics
- Industrial & Commercial
- Instrumentation & Medical Equipment

- By Brand
- A to Z

[Documentation](#)

- Find
 - Documents & Drawings
 - Find CAD Models
 - SPICE/Electrical Models
 - NAFTA Certificate of Origin
 - White Papers

[Resources](#)

- RoHS
 - Compliance & Alternates
 - Cross Reference Products
 - Compare Multiple Products
 - Check Distributor Inventory
 - Find Authorized Distributors

[My Account](#)


- Sign In
- Register

[Customer Support](#)

- Support
 - RoHS Support Center
 - Glossary of Terms
 - eBulletin Newsletter

[Home](#) > [Products](#) > [By Type](#) > [Switches](#) > [Product Feature Selector](#) > Product Details

2-1825011-5 Product Details

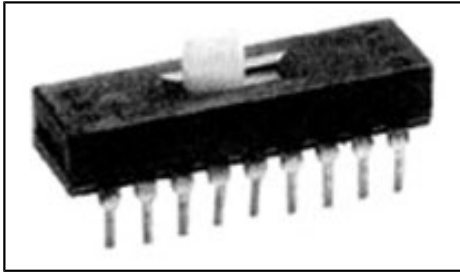

2-1825011-5
(ASF42GL04)

✓ [Active](#)

Slide Switches

 [Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

Product Highlights:

- Number of Positions = 4
- Four Pole - Double Throw Configuration (Pole-Throw)
- Actuator Style = Flush, Top
- Actuator Color = Natural
- ASE/F Series

[View all Features](#)

Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

Documentation & Additional Information

Product Drawings:

- [SLIDE SWITCH ASF, AUTO-INSERTABLE, THRU-HOLE AND SUR...](#) (PDF, English)

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files:

- None Available

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- [Number of Positions](#) = 4
- Configuration (Pole-Throw) = Four Pole - Double Throw
- Actuator Style = Flush, Top
- Mount Angle = Vertical
- Grade = Telecom
- Termination Type = PC

Electrical Characteristics:

- Contact Rating = 300mA @ 115 VDC

Body Related Features:

- Actuator Color = Natural
- Series = ASE/F
- Mount Style = Surface Mount
- Switch Style = Auto-insertable
- PCB Tail Length (mm [in]) = 4.06 [0.160]
- Actuator Material = Polyester

Contact Related Features:

- Contact Plating = Gold
- Contact Material = Copper Alloy

Configuration Related Features:

- Terminal Configuration = Standard
- Number of Actuators = Single

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Reflow solder capable to 245°C
- RoHS/ELV Compliance History = Always was RoHS compliant

Identification Marking:

- Stamped Marking = With

Other:

- Brand = Tyco Electronics

[Provide Website Feedback](#) | [Contact Customer Support](#)

[Home](#) | [Customer Support](#) | [Suppliers](#) | [Site Map](#) | [Privacy Policy](#) | [Browser Support](#)

© [2007 Tyco Electronics Corporation All Rights Reserved](#)