





REVISIONS							
REV	ECO	DESCRIPTION	DATE	BY	APPR		
A1	-	RELEASE NUMBER	30/NOV/18	BROOK	TOMMY		





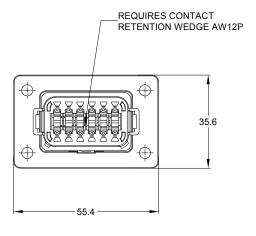



12PA RECEPTACLE, FLANGE MOUNT, BLACK, RD

DWG NO:

AT04-12PA-CL06

REV: A1 SH:

NOTES: UNLESS OTHERWISE SPECIFIED

- 1. COLOR:BLACK
- 2. MATERIAL:


HOUSING: THERMOPLASTIC SEAL: SILICONE RUBBER

- 3. MODIFICATIONS: FLANGE, REDUCED DIA. WIRE SEAL
- 4. SPECIFICATIONS:
 - 4.1 CURRENT RATING: 13 AMPS
 - 4.2 OPERATING TEMPERATURE: -55°C TO +125°C.
 - 4.3 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE m 1500 VOLTS AC.
 - 4.4 INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 25℃.
 - 4.5 MOISTURE RESISTANCE: IP67 (MATED CONDITION)
 - 4.6 MATING CYCLE DURABILITY: 100 CYCLES
 - 4.7 RoHS COMPLIANT
- 5. MATING PART: AT06-12SA* PLUG. (* = MODIFICATIONS AND COLORS)
- 6. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.


7 CONTACT SIZE AND REAR SEAL WIRE RANGE:


CONTACT	MIN. INSUL	MAX. INSUL	TYPICAL
SIZE	O.D.	O.D.	WIRE RANGE
16	1.35 mm (.053 in)	3.05 mm (.120 in)	

	AT04-12	PA-CL06	3				1
	PART N	IUMBER		DESCRIPTION		ITEM]•
QUANTITY MA			JAT	ERI	ALS LIST		F
UNLESS OTHERWISE SPECIFIED		SIGNA	ATURES	DATE	TE Amphanal		
1) All dimensions are in metric(mm). 2) Tolerances are as follows: 1 PL DEC ±0.30 Fractions ±1/64		DRAWN:	BROOK	30/NOV/18	Amphenol		
2 PL DEC ±0.15 3 PL DEC ±0.08	Fractions ±1/64 Angles ±1*	CHECKED:	ORION	30/NOV/18	8 Sine Systems - www.amphenol-sine.com		
3) Note reference = X		ENGINEER:			44724 Morley Drive		
MATERIAL SPECIFICA	ITIONS:	APPROVAL:	TOMMY	30/NOV/18	Clinton Township, MI 48036		+
		CUSTOMER:			12PA RECEPTACLE, FLANGE MOUNT, BLACK, RD		
PROCESS SPECIFICATIONS: NEXT ASSY:		THIS DRAWING INFORMATION O SPECIFICATION SHOWN HEREO THE AMPHENOI OF REPRODUC' DIMENSIONS AF MANUFACTURIN	ONLY. DESIGN IS AND PERFO IN ARE THE PE L CORPORATION TION ARE IMPI RE SUBJECT T	MANACE DATA DE TYPE DWG NO: NO RIGHTS BE C ATTO4-12PA-CL06		2 2	

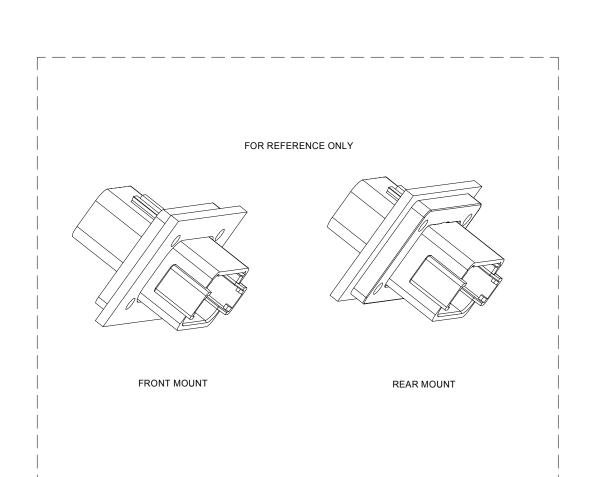

	REVISIONS							
REV	ECO	DESCRIPTION DATE BY APP						
A1	_	RELEASE NUMBER	30/NOV/18	BROOK	TOMMY			

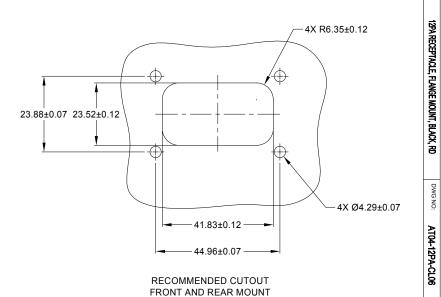

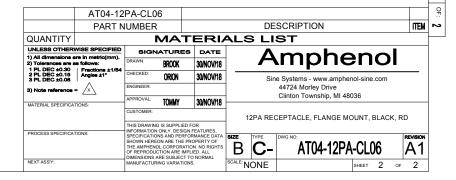

 \sim

AT Series™ - Contact Size 16 Options

Machined Contacts, Sockets & Pins						
Part Number	Description		AWG	Туре		
AT60-215-1631	Male Contact - Pin, Gold-plated 16 14		Machined			
AT62-209-1631	Female Contact - Socket, Gold-plated	16	14	Machined		
AT60-215-16141	Male Contact - Pin, Nickel-plated	16	14	Machined		
AT62-209-16141	Female Contact - Socket, Nickel-plated	16	14	Machined		
AT60-202-1631	Male Contact - Pin, Gold-plated	16	16-20	Machined		
AT62-201-1631	Female Contact - Socket, Gold-plated	16	16-20	Machined		
AT60-202-16141	Male Contact - Pin, Nickel-plated 16 16-20		Machined			
AT62-201-16141	Female Contact - Socket, Nickel-plated	16	16-20	Machined		
AT60-202-1631-22	Male Contact - Pin, Gold-plated	16	22-24	Machined		
AT62-201-1631-22	Female Contact - Socket, Gold-plated	16	22-24	Machined		
AT60-202-16141-22	Male Contact - Pin, Nickel-plated	16	22-24	Machined		
AT62-201-16141-22 Female Contact - Socket, Nickel-plated 16 22-24		22-24	Machined			

Tooling - Machined Contacts				
Part	Part Number	Description		
	CA-5D12	Universal Hand Crimp Tool, Size 12/16/20 (Machined contacts only)		
3	CA-5E12	Pneumatic Crimp Tool, Size 12/16/20 (Machined contacts only)		

Contact Removal Tools				
Part	Part Number	Description		
	ATRT-100	Used for removal of contacts for A Series™ products		
	AT11-310-1605	Contact Removal Tool, Plastic, Size 16		
	A114017	Sealing Plug, Size 16, White		

Stamped & Formed Contacts, Sockets & Pins						
Part Number	Description	Size	AWG	Type		
AT60-14-0144	Male Contact - Pin, Gold-plated	16	14-16	Stamped & Formed		
AT62-14-0144	Female Contact - Socket, Gold-plated	16	14-16	Stamped & Formed		
AT60-14-0122	Male Contact - Pin, Nickel-plated	16	14-16	Stamped & Formed		
AT62-14-0122	Female Contact - Socket, Nickel-plated	16	14-16	Stamped & Formed		
AT60-16-0144	Male Contact - Pin, Gold-plated	16	16-18	Stamped & Formed		
AT62-16-0144	Female Contact - Socket, Gold-plated	16	16-18	Stamped & Formed		
AT60-16-0122	Male Contact - Pin, Nickel-plated	16	16-18	Stamped & Formed		
AT62-16-0122	Female Contact - Socket, Nickel-plated	16	16-18	Stamped & Formed		
AT60-16-0644	Male Contact - Pin, Gold-plated	16	18-20	Stamped & Formed		
AT62-16-0644	Female Contact - Socket, Gold-plated	16	18-20	Stamped & Formed		
AT60-16-0622	Male Contact - Pin, Nickel-plated	16	18-20	Stamped & Formed		
AT62-16-0622	Female Contact - Socket, Nickel-plated	16	18-20	Stamped & Formed		
AT60-16-0844	Male Contact - Pin, Gold-plated	16	20-22	Stamped & Formed		
AT62-16-0844	Female Contact - Socket, Gold-plated	16	20-22	Stamped & Formed		
AT60-16-0822	Male Contact - Pin, Nickel-plated	16	20-22	Stamped & Formed		
AT62-16-0822	Female Contact - Socket, Nickel-plated	16	20-22	Stamped & Formed		

Tooling - Stamped & Formed Contacts				
Part	Part Number	Description		
	MFX-3950	Crimp Die - Size 16, 18-20AWG (S&F contacts only)		
	MFX-3953	Crimp Die - Size 16, 16-18AWG (S&F contacts only)		
	MFX-3975	Crimp Die - Size 16, 14-16AWG (S&F contacts only)		
	MFX-3990	Crimp Die - Size 16, 20-22AWG (S&F contacts only)		
	ATT-16-00	Hand Crimp Tool - Size 16, 14-16AWG (S&F contacts only)		
	ATT-16-01	Hand Crimp Tool - Size 16, 18-20AWG (S&F contacts only)		
	ATT-1612-03	Hand Crimp Tool - Size 16, 20-22AWG (S&F contacts only)		

Amphenol Sine Systems 44724 Morley Drive Clinton Township, MI 48036 USA www.amphenol-sine.com 09/2021