



## Automatic Guystrand T&B Catalog Number:


**UPC Number:**  
**Status:**  
**Description:**

ATDG14  
78378643263  
Active

Automatic Tension Deadend Guystrand for Steel Strand Diameter 1/4 (6.35) for use on Utilites, Common, Siemens-Martin, High-Strength, Strand Rating 1/4 (6.6M), Standard Bail

### Features

Built tough. The connectors can handle tensile loads in excess of 90 percent of the rated strength of the recommended strands. They also exceed 90 percent of the strand rated breaking strength (RBS). Pilot Cap and Jaw eliminate incorrect insertions. Slotted access window enables jaw adjustment for repositioning, removal or retensioning of strand deadends). Aluminum cartridge and internal components are lubricated for long-term continuous performance and corrosion resistance.

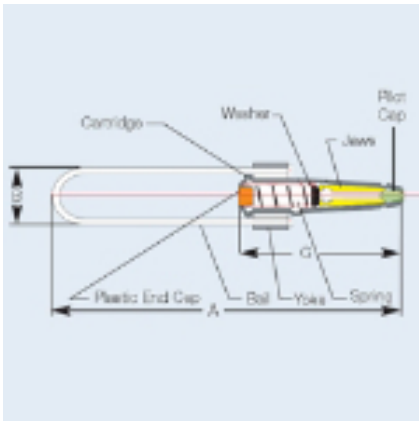

### General

Style	ATDG - Standard Bail
Material	Aluminum
Strand Rating	1/4 (6.6M)
Strand RBS LBS. (KN)	6,650 (29.58)

### Dimension Information

Length (inches)	9.2
B (inches)	1.7
C (inches)	4.0
Strand Nominal Diameter Inches (MM)	1/4 (6.35)

### Packaging

T&B Order Multiple	12
Package in Units	12
T&B Sold in UOM	Each
T&B Weight Per UOM	0.43 lbs. Each

### Notes

Recommended for use on: Common grade, Siemens-Martin, High-strength utility grade, EHS, Galvanized, Bethalume, Aluminized steel strand (per ASTM A 474, A 475)  
RBS rating listed is for 7 wire EHS strand.

### For further technical assistance, please contact us...

Thomas & Betts - USA  
8155 T&B Blvd.  
Memphis, TN 38125  
www.tnb.com

T&B Technical Support  
MS 3B-50  
8155 T&B Blvd.  
Memphis, TN 38125

Hours: 7AM - 6PM CDT  
Monday-Friday  
Phone: (888) 862-3289  
Fax: (901) 252-1321  
Email: techsupport@tnb.com