

ATW019

Tubular screw terminal block, centerline 10 mm / 0.394 inches, flat base, horizontal wire entry

Technical Data

	V / A / AWG	300 / 30 / 22 - 12 solid / 14 - 10 stranded
	V / A / AWG Screw torque	400 / 20 / 18 - 14 max. 4.4 lbs.-in
	2.5 mm ² Screw torque	400 V / 24 A max. 0.5 Nm
	Wire strip length	7.3 mm / 0.287 in.
	Pole size	1 to 12
	Color	Natural


ATW029

Tubular screw terminal block, centerline 10 mm / 0.394 inches, flat base, horizontal wire entry, wire protector

Technical Data

	V / A / AWG	300 / 30 / 22 - 12 solid / stranded / 10 solid
	V / A / AWG Screw torque	400 / 20 / 18 - 14 max. 4.4 lbs.-in
	2.5 mm ² Screw torque	400 V / 24 A max. 0.5 Nm
	Wire strip length	7.3 mm / 0.287 in.
	Pole size	1 to 12
	Color	Natural

Dimensions in mm 1 mm = 0.0394 in.

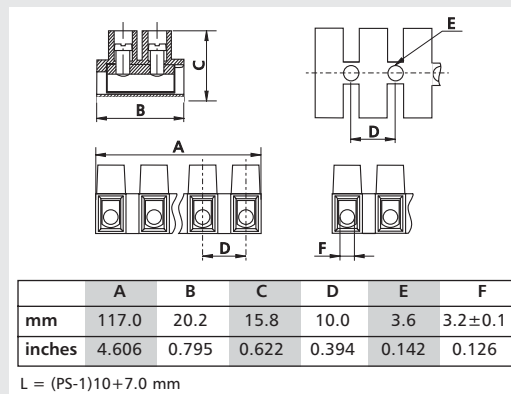

Part numbers (P/N)

(information: page 165)

Complete the part number by adding the pole size.

ATW019

centerline 10 mm / 0.394 inches


P/N ATW019

	01	02	03	04	05	06	07	08
	09	10	11	12				

Standard pole sizes

Available on demand. Minimum order quantity 5000 pieces per item.

Dimensions in mm 1 mm = 0.0394 in.

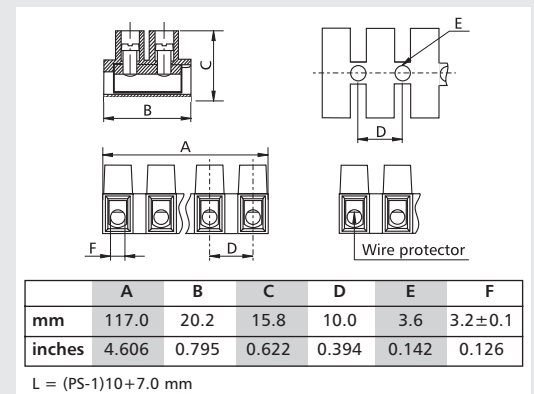

Part numbers (P/N)

(information: page 165)

Complete the part number by adding the pole size.

ATW029

centerline 8 mm / 0.394 inches

P/N ATW029

	01	02	03	04	05	06	07	08
	09	10	11	12				

Standard pole sizes

Available on demand. Minimum order quantity 5000 pieces per item.