

## ATW039

Tubular screw terminal block, centerline 10 mm / 0.394 inches, 1.2 mm / 0.047 inches raised base, horizontal wire entry

### Technical Data

	V / A / AWG	300 / 30 / 22 - 10 solid / 14 - 10 stranded
	V / A / AWG Screw torque	400 / 20 / 18 - 14 max. 4.4 lbs.-in
	2.5 mm <sup>2</sup> Screw torque	400 V / 24 A max. 0.5 Nm
	Wire strip length	7.3 mm / 0.287 in.
	Pole size	1 to 12
	Color	Natural


## ATW049

Tubular screw terminal block, centerline 10 mm / 0.394 inches, 1.2 mm / 0.047 inches raised base, horizontal wire entry, wire protector

### Technical Data

	V / A / AWG	300 / 30 / 22 - 12 solid / stranded / 10 solid
	V / A / AWG Screw torque	400 / 20 / 18 - 14 max. 4.4 lbs.-in
	2.5 mm <sup>2</sup> Screw torque	400 V / 24 A max. 0.5 Nm
	Wire strip length	7.3 mm / 0.287 in.
	Pole size	1 to 12
	Color	Natural


Dimensions in mm 1 mm = 0.0394 in.

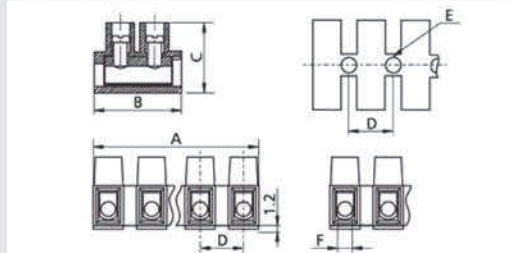

	A	B	C	D	E	F
mm	117.0	20.2	17.0	10.0	3.6	3.4±0.1
inches	4.606	0.795	0.670	0.394	0.142	0.134

L = (PS-1)10+7.0 mm

Dimensions in mm 1 mm = 0.0394 in.

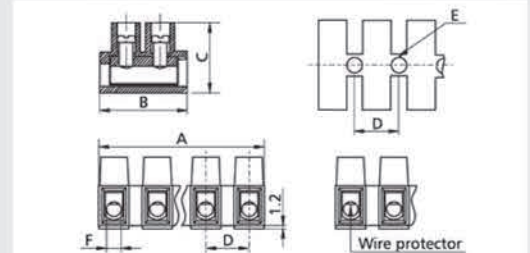

	A	B	C	D	E	F
mm	117.0	20.2	17.0	10.0	3.6	3.4±0.1
inches	4.606	0.795	0.670	0.394	0.142	0.134

L = (PS-1)10+7.0 mm

### Part numbers (P/N)

(information: page 165)

Complete the part number by adding the pole size.

#### ATW039

centerline 10 mm / 0.394 inches

P/N ATW039

	01	02	03	04	05	06	07	08
	09	10	11	12				

- Standard pole sizes
- Consult factory

### Part numbers (P/N)

(information: page 165)

Complete the part number by adding the pole size.

#### ATW049

centerline 10 mm / 0.394 inches

P/N ATW049

	01	02	03	04	05	06	07	08
	09	10	11	12				

- Standard pole sizes
- Consult factory