

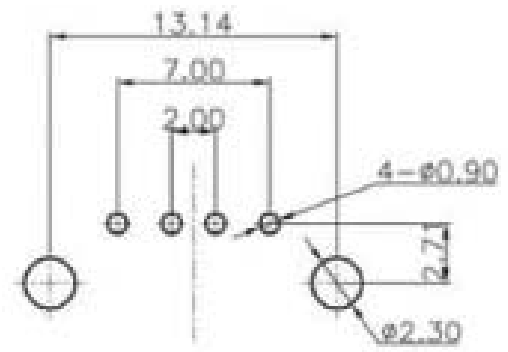
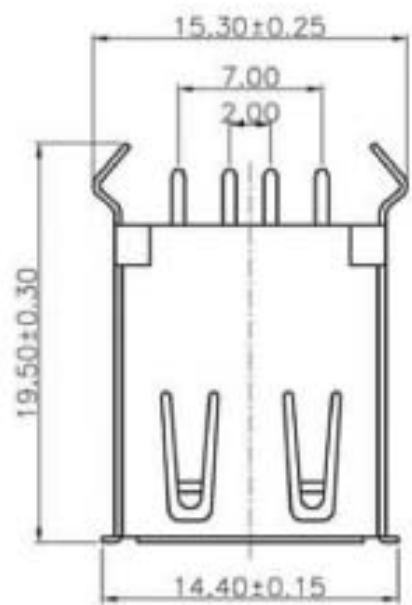


A
B
C
D
E
F
G
H

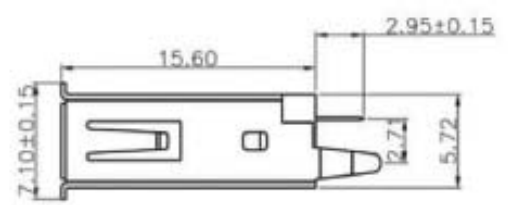

RECOMMENDED PCB LAYOUT

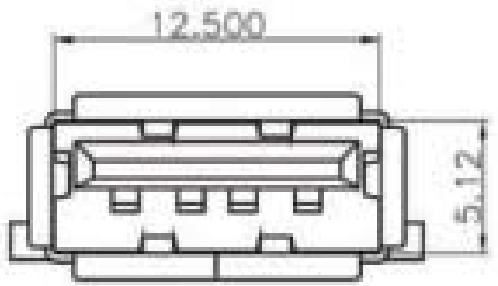

NOTES:

- Insulator: PBT
- Contacts: Phosphorbronze, t=0.25mm
- Shell: Brass t=0.3 / Finish: Nickel Plated
- Withstanding Voltage: 500V AC (1 min)
- Insulation Resistance: 1000M min.
- Rated Voltage and Current: 1.5A at 250V AC min.

Scale	1:1						Name	Item No. A-USB-A-TOP-R (Type A, Version 1.1 5µ" Gold) A-USB/2-A-TOP-R (Type A, Version 2.0, 30µ" Gold)
TOLERANCE					Drawn	10.19.11	Chappell	
X.X	±0.40				Approved			Title USB, Type A, Top Entry, Tray Packing
X.XX	±0.25							
X.XXX	±0.15							Drawing No.
Angle	±3°							
								Replace
								Sheet



A
B
C
D
E
F
G
H