

AWLP-xx/3.2-x-R

T - Tin
G - Gold




Of Contacts
10 - 64

Material:


- Insulator Material: PBT+30%GF(UL94V-0)
- Contact Material: Brass or Phosphor Bronze
- Underplated: Nickel
- Contact Area: 1µ"-30µ" Selective Gold

Electrical:

- Current Rating : 1AMP
- Insulation Resistance: 1000Ω Min
- Dielectric Withstanding: 500V AC
- Operation Temperature: -55°C to +105°C

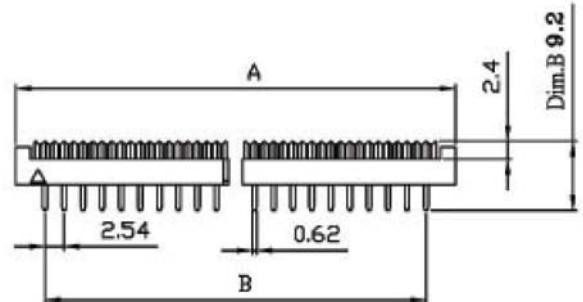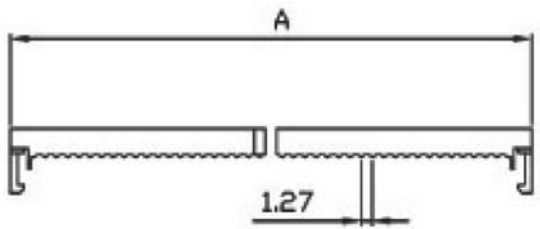

Position	A	B	Position	A	B
10	18.10	10.16	30	43.50	35.58
14	23.05	15.24	34	48.58	40.64
16	25.64	17.78	40	66.20	48.26
18	28.15	20.32	50	69.00	60.96
20	30.78	22.66	60	81.75	73.66
24	35.86	27.94	64	86.83	78.74
26	38.40	30.48			



Unit: mm



Scale	1:1					Date	Name	Title IDC Transition Connector for PCB mount, 2.54mm pitch
TOLERANCE						Drawn	Chappell	
X.X	±0.40					Approved	Groll	ASSMANN WSW-No. AWLP-xx-/3.2-x-R
X.XX	±0.25							Drawing-No.
X.XXX	±0.15							
DIM	TOL							
X.°	±3°							
X.X°	±X°	①	Updated information	03.04.13	Wilson			rev01
Angle	TOL	Id.	Modification	Date	Name			Sheet 1/1

