

# AZ770

## SPDT SUBMINIATURE POWER RELAY

### FEATURES

- Small footprint
- 5 kV dielectric strength, 10 kV surge
- Class B insulation standard
- 8 mm creepage and clearance
- Epoxy sealed version available
- 5 Amp switching
- UL, CUR file E44211, VDE 40006815



### CONTACTS

<b>Arrangement</b>	SPST (1 Form A) SPDT (1 Form C)
<b>Ratings</b>	Resistive load: Max. switched power: 150 W (SPST-NO) standard 1250 VA (SPST-NO) standard 90 W (SPDT) 750 VA (SPDT) Max. switched current: 5 A AC SPST-NO standard 5 A DC SPST-NO standard 3 A AC/DC SPST-NO sensitive 3 A AC/DC SPDT Max. switched voltage: 150* VDC or 380 VAC  *Note: If switching voltage is greater than 30VDC, special precautions must be taken. Please contact the factory.
<b>Rated Load UL, CUR</b>	Form A (N.O.) 5 A at 250 VAC, Res., 100k cycles 5 A at 30 VDC, Res., 100k cycles 1/8 HP, 125 / 250 VAC, 100k cycles 3 A at 250 VAC, 0.4 PF., 100k cycles C300 Pilot Duty, 125 / 250 VAC, 100k cycles TV-2, 120 VAC Form C 3 A at 250 VAC, Res. 100k cycles 3 A at 30 VDC, Res. 100k cycles
<b>VDE</b>	Form A and Form C 5 A at 250 VAC, 100k cycles
<b>Material</b>	Silver nickel, gold plating available
<b>Resistance</b>	<100 milliohms initially (24 V, 1 A voltage drop method)

### COIL

<b>Power At Pickup Voltage (typical)</b>	253 mW standard 113 mW sensitive
<b>Max. Continuous Dissipation</b>	1.25 W at 20°C (68°F) ambient
<b>Temperature Rise</b>	41°C (74°F) at nominal coil voltage, standard 22°C (40°F) at nominal coil voltage, sensitive
<b>Temperature</b>	Max. 130°C (266°F)

### GENERAL DATA

<b>Life Expectancy Mechanical Electrical</b>	Minimum operations 1 x 10 <sup>6</sup> 1 x 10 <sup>5</sup> at 5 A 240 VAC Res.
<b>Operate Time (typical)</b>	8 ms at nominal coil voltage
<b>Release Time (typical)</b>	4 ms at nominal coil voltage (with no coil suppression)
<b>Dielectric Strength (at sea level for 1 min.)</b>	5000 Vrms coil to contact 1000 Vrms between open contacts
<b>Surge Voltage Coil to contact</b>	10,000V (at 1.2x50 μs)
<b>Insulation Resistance</b>	1000 megohms min. at 20°C 500 VDC 50% RH
<b>Dropout</b>	Greater than 5% of nominal coil voltage
<b>Ambient Temperature Operating Storage</b>	At nominal coil voltage -40°C (-40°F) to 90°C (194°F), standard -40°C (-40°F) to 105°C (221°F), sensitive -40°C (-40°F) to 130°C (266°F)
<b>Vibration</b>	0.062" DA at 10–55 Hz
<b>Shock</b>	10 g operating, 100 g damage
<b>Enclosure</b>	P.B.T. polyester
<b>Terminals</b>	Tinned copper alloy, P.C.
<b>Max. Solder Temp.</b>	270°C (518°F)
<b>Max. Solder Time</b>	5 seconds
<b>Max. Solvent Temp.</b>	80°C (176°F)
<b>Max. Immersion Time</b>	30 seconds
<b>Weight</b>	4.6 grams

### NOTES

1. All values at 20°C (68°F).
2. Relay may pull in with less than "Must Operate" value.
3. Specifications subject to change without notice.



**AMERICAN ZETTLER, INC.**

[www.azettler.com](http://www.azettler.com)

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM

6/28/05W

# AZ770

## RELAY ORDERING DATA


STANDARD RELAYS – TYPE 1 FOOTPRINT					
COIL SPECIFICATIONS				ORDER NUMBER*	
Nominal Coil VDC	Must Operate VDC	Max. Continuous VDC	Coil Resistance	Form A (SPST)	Form C (SPDT)
3	2.25	3.9	20 ± 10%	AZ770-1A-3D	AZ770-1C-3D
5	3.75	6.5	55 ± 10%	AZ770-1A-5D	AZ770-1C-5D
6	4.5	7.8	80 ± 10%	AZ770-1A-6D	AZ770-1C-6D
9	6.75	11.7	180 ± 10%	AZ770-1A-9D	AZ770-1C-9D
12	9.0	15.6	320 ± 10%	AZ770-1A-12D	AZ770-1C-12D
18	13.5	23.4	720 ± 10%	AZ770-1A-18D	AZ770-1C-18D
24	18.0	31.2	1,280 ± 10%	AZ770-1A-24D	AZ770-1C-24D
48	36.0	62.4	5120 ± 15%	AZ770-1A-48D	AZ770-1C-48D

SENSITIVE RELAYS – TYPE 1 FOOTPRINT					
COIL SPECIFICATIONS				ORDER NUMBER*	
Nominal Coil VDC	Must Operate VDC	Max. Continuous VDC	Coil Resistance	Form A (SPST)	
3	2.25	5.1	45 ± 10%	AZ770-1A-3DS	
5	3.75	8.5	125 ± 10%	AZ770-1A-5DS	
6	4.5	10.2	180 ± 10%	AZ770-1A-6DS	
9	6.75	15.3	400 ± 10%	AZ770-1A-9DS	
12	9.0	20.4	720 ± 10%	AZ770-1A-12DS	
18	13.5	30.6	1600 ± 10%	AZ770-1A-18DS	
24	18.0	40.8	2800 ± 10%	AZ770-1A-24DS	
48	36.0	81.6	11520 ± 15%	AZ770-1A-48DS	

\*Add suffix "E" for epoxy sealed version. Add suffix "K" for Type 2 footprint. Add suffix "G" for gold plated contacts.

## MECHANICAL DATA

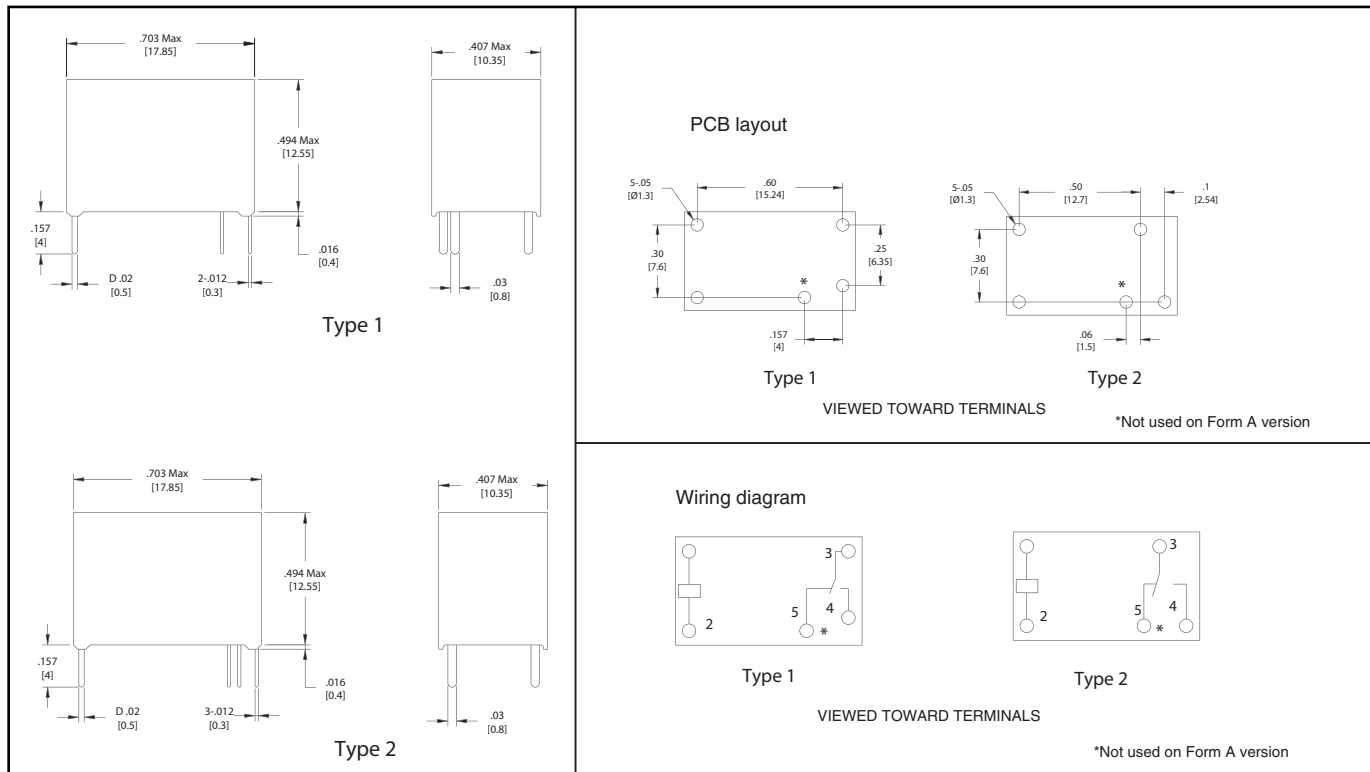

Dimensions in inches with metric equivalents in parentheses. Tolerance: ± .010"



**AMERICAN ZETTLER, INC.**

[www.azettler.com](http://www.azettler.com)

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM

6/28/05W